

AMP Power Series - 175 TE Internal #: 1604042-6 Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175

### View on TE.com >





Rectangular Power Connector Type: Connector Assembly Connector & Housing Type: Plug, Receptacle

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 19.06 mm [.75 in ]

## Features



### **Product Type Features**

| Assembly Requirement               | Unassembled Kit    |  |  |  |  |
|------------------------------------|--------------------|--|--|--|--|
| Compatible With Discrete Wire Type | Stranded           |  |  |  |  |
| Rectangular Power Connector Type   | Connector Assembly |  |  |  |  |
| Connector & Housing Type           | Plug, Receptacle   |  |  |  |  |
| Connector System                   | Wire-to-Wire       |  |  |  |  |
| Sealable                           | No                 |  |  |  |  |
| Connector & Contact Terminates To  | Wire & Cable       |  |  |  |  |
| Configuration Features             |                    |  |  |  |  |
| Number of Positions                | 2                  |  |  |  |  |
| Number of Power Positions          | 0                  |  |  |  |  |
| Number of Signal Positions         | 0                  |  |  |  |  |
| Number of Rows                     | 1                  |  |  |  |  |
| Electrical Characteristics         |                    |  |  |  |  |
| Operating Voltage                  | 600 VDC            |  |  |  |  |

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175



## **Contact Features**

| Contact Mating Area Plating Material           | Silver                     |  |  |  |  |
|--|----------------------------|--|--|--|--|
| Contact Current Rating (Max)                   | 175 A                      |  |  |  |  |
| Contact Retention Within Housing               | Without                    |  |  |  |  |
| Contact Type                                   | Blade                      |  |  |  |  |
| Wire Contact Termination Area Plating Material | Silver                     |  |  |  |  |
| Contact Mating Area Plating Material Thickness | 1.27 μm[50 μin]            |  |  |  |  |
| Termination Features                           |                            |  |  |  |  |
| Termination Method to Wire & Cable             | Crimp                      |  |  |  |  |
| Mechanical Attachment                          |                            |  |  |  |  |
| Mating Alignment Type                          | Keyed                      |  |  |  |  |
| Mating Retention                               | With                       |  |  |  |  |
| Mating Alignment                               | With                       |  |  |  |  |
| Panel Mount Feature                            | Without                    |  |  |  |  |
| Mating Retention Type                          | Latch                      |  |  |  |  |
| Connector Mounting Type                        | Cable Mount (Free-Hanging) |  |  |  |  |

## **Housing Features**

| Centerline (Pitch)          | 19.06 mm[.75 in]          |  |  |  |
|-----------------------------|---------------------------|--|--|--|
| Housing Color               | Black                     |  |  |  |
| Housing Material            | Polycarbonate             |  |  |  |
| Dimensions                  |                           |  |  |  |
| Connector Height            | 25.4 mm[1 in]             |  |  |  |
| Product Width               | 53.5 mm[2.11 in]          |  |  |  |
| Product Length              | 78.2 mm[3.08 in]          |  |  |  |
| Wire Size                   | 98676 – 118412 CMA        |  |  |  |
| Usage Conditions            |                           |  |  |  |
| Operating Temperature Range | -20 – 105 °C[-4 – 221 °F] |  |  |  |
| Operation/Application       |                           |  |  |  |
| Circuit Application         | Power                     |  |  |  |
| Industry Standards          |                           |  |  |  |
| UL Rating                   | Recognized                |  |  |  |
| Agency/Standard             | UL                        |  |  |  |

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175



| Approved Standards   | UL E28476  |
|--|--|
| UL Flammability Rating   | UL 94V-0   |
| Glow Wire Rating   | Standard Part - Not Glow Wire  |
| Packaging Features   |  |
| Packaging Method   | Box  |
| <b>Product Compliance</b><br>For compliance documentation, visit the product page on TE.com> |  |
| EU RoHS Directive 2011/65/EU   | Compliant  |
| EU ELV Directive 2000/53/EC  | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016  | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006   | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JAN 2022<br>(223)<br>Does not contain REACH SVHC |
| Halogen Content  | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free  |
| Solder Process Capability  | Not applicable for solder process capability   |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

## **Compatible Parts**

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175






# Also in the Series | AMP Power Series - 175



# Customers Also Bought

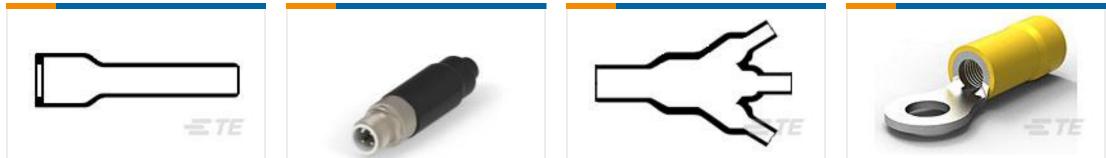

|  | = TE  |  |  |
|--|---|--|--|
| TE Part #689127-000<br>202D211-25/225-0            | TE Part #1-2823445-1<br>M12 D-M-4, CRIMP, CAT5 RADOX 6.6<br>MM, H&S | TE Part #997172-000<br>462A023-25/225-0  | TE Part #2-34854-1<br>TERMINAL,PG R 12-10 10 |
| TE   |   |  |  |
| TE Part #1604041-1<br>CONTACT,175A/180A,#1 AWG,L/P | TE Part #514596-000<br>562A011-25/86-0                              | TE Part #YDTS26F13-98SNV001<br>PLUG ASSY | TE Part #YDTS26W13-98PNV001<br>PLUG ASSY     |



Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175



## Documents

Product Drawings KIT,175A,1/0 AWG,BLACK

English

### **CAD** Files

Customer View Model ENG\_CVM\_1604042-6\_O.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_1604042-6\_O.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_1604042-6\_O.2d\_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

## Datasheets & Catalog Pages

POWER\_CONNECTORS\_CATALOG\_SEC02\_CABLE\_MOUNTED

English

2\_PIECE\_POWER\_CONNECTORS\_qrg\_4-1773458-1

English

Product Specifications Application Specification

English