


-	T	വ	т	ш	D	0

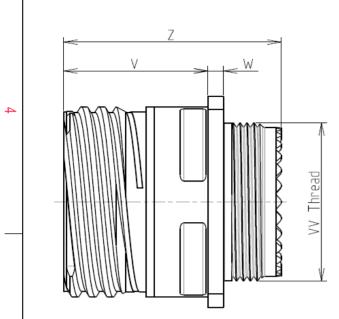

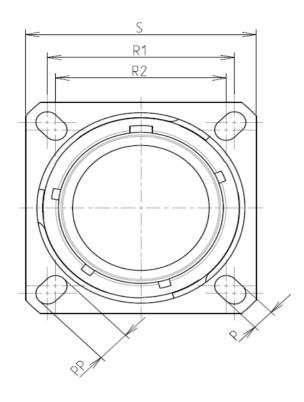



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel			
-Shell Plating	: Passivated			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65°C to +200°C			
-Salt Spray	: 500 hours			

8D 0

G

13

Κ

03

Ρ


F


L

А

	r dimension
Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g

Е



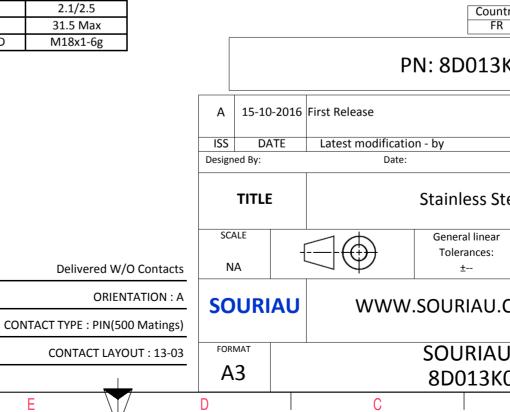

σ		A				
				4		
AS EXAMPLE				3		
r any non-conformity or damage s which does not comply with er of the Parties or by a third party ndation, technical notice.) untry Jurisdiction & Control List FR Not Listed 3KO3PAL						
	CUSTOME	R DRAWING	MOD N°			
Steel Receptacle 8D series						
ar :		/ PROJECT 859		1		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
AU DRG N° SHEET KO3PAL-C 1/2						
B		A	,	J		
	·					

		۵	п –	m	D	0	
		Contact Layout					Panel Cutou
4		03 () () () () () () () () () () () () ()				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47					im
ယ						Ø	ðА АА 81 ðT
	-				[
	3					SOURIAU shall not b due to a use of th the Specifications issue (professional	e Products wh ed by either of
N							Countr FR
						PN:	8D013K
					A 15-:	10-2016 First Release	
					ISS I Designed By:	DATE Latest modification - b Date:	У
					тіті	.E Sta	ainless Ste
<u> </u>					SCALE NA		General linear Tolerances: ±
					SOUR	WWW.SO	URIAU.C
					FORMAT A3		OURIAU D013K0
	Н	G	F	E	D	C	

