
—	Ω	н т	m –	<u>с</u>





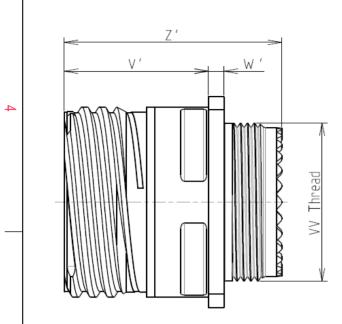

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	: -65°C to +200°C
	-Salt Spray	: 2000 hours
	-Mass	: 20.1 g ± 10%

8D 0

G

13

Μ

26

S

F

D

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
VV THREAD	M18x1-6g


ORIENTATION : D

CONTACT LAYOUT : 13-26

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

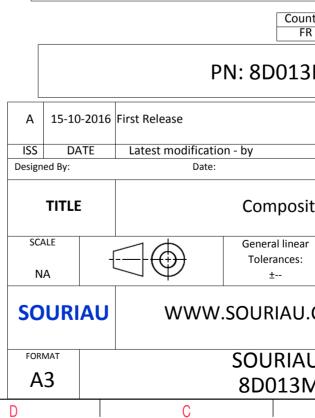

σ		Þ			
R				4	
AS EXAMPLE				3	
any non-conformits which does not co or of the Parties or b adation, technical n untry Jurisc FR 3M26SD	mply with by a third part			2	
	CUSTOMER	RDRAWING	MOD N°		
ite Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°	<u> </u>		SHEET		
M26SD-C		A	1/2	J	
U	I	A			

-	т	۵	<u>п</u>	m	D	0
		Contact Layout				Panel Cutou
4		26			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		2#12 6#22D	1		¥	
c.s	Ctc A B C D E F 1 2	X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 -4.34 3.25 0 -3.25 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
N						PN: 8D013N
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	
	Н	G	F	E	FORMAT A3	SOURIAU 8D013M
	11		1 I			

