

■ Features

- Single output to 36W
- 100-240Vac Universal input
- Certificates: UL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 120mV
- OVP, OCP, SCP, and Overload protection
- Efficiency level: VI
- Available Plug types: US, EU, AU, UK plug
- Dimension: 76x50x32.5mm (exclude plug)



\*Product images are for illustrative purposes only and may vary from actual design.

■ Application


- Consumer electronics, Telecom and office equipment
- Industrial equipment


■ Model List

Custom Designs Available!

| Model           | Output Voltage | Output Current | Power | Certifications |
|-----------------|----------------|----------------|-------|----------------|
| WM036S-090-X-XX | 9V             | 4A             | 36W   | UL, CE         |
| WM036S-120-X-XX | 12V            | 3A             | 36W   | UL, CE         |
| WM036S-150-X-XX | 15V            | 2.4A           | 36W   | UL, CE         |
| WM036S-180-X-XX | 18V            | 2A             | 36W   | UL, CE         |
| WM036S-240-X-XX | 24V            | 1.5A           | 36W   | UL, CE         |

■ Mechanical Diagram

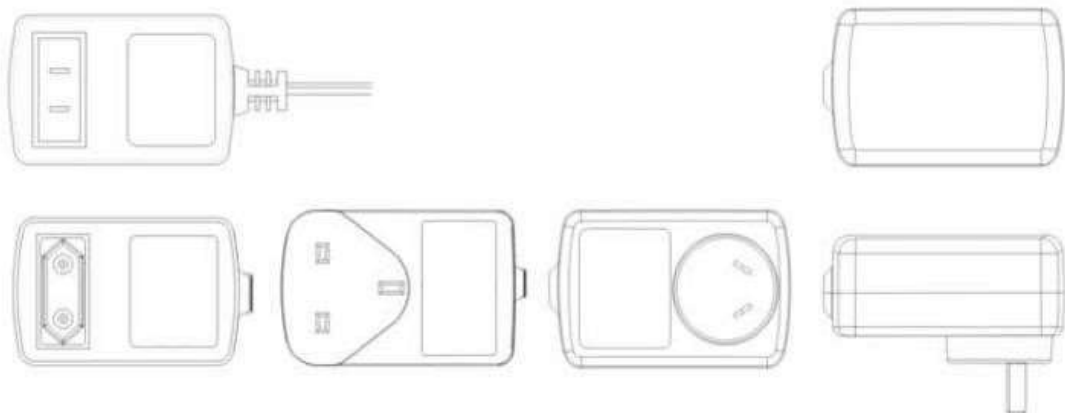

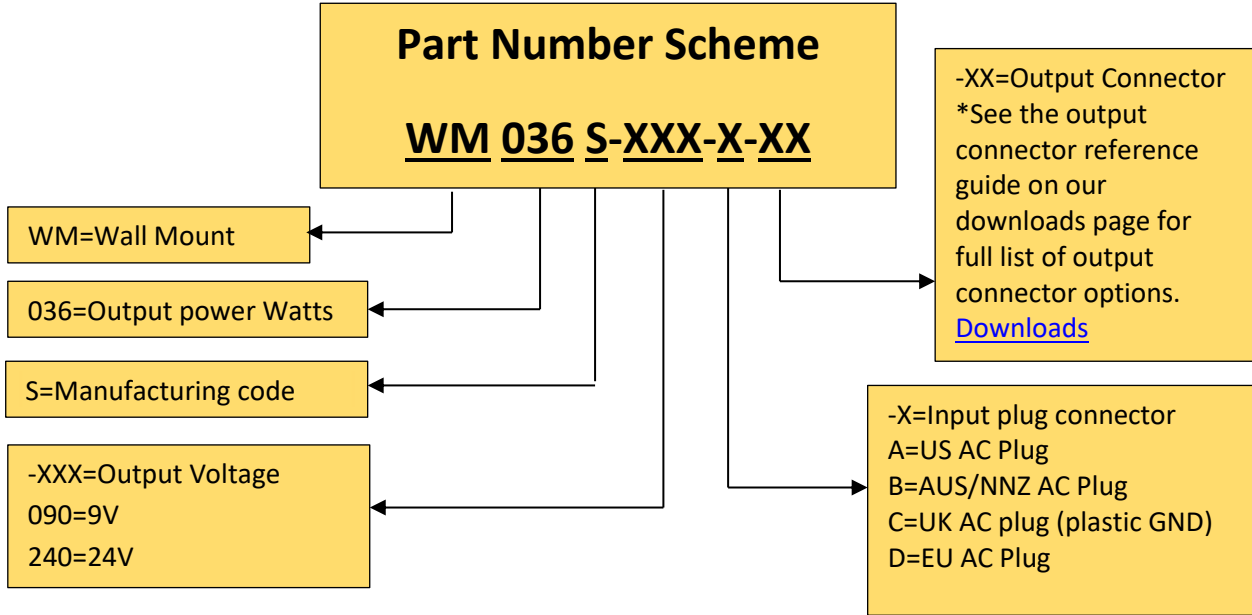

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**