
<b>—</b>	۵	<del>بر</del>	m	<b>O</b>





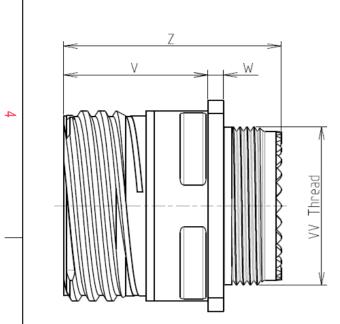

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
$\sim$	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			
_	-Mass	: 32.47 g ± 10%			

8D 0

G

11

S

01

S

F

E

P         3.25±0.2           PP         4.93±0.2           R1         20.62           R2         18.26           S         26.2±0.3           V         20.83+0/-1.25           W         2.1/2.5           Z         31.5 Max           VV THREAD         M15x1-6g	Connector dimension Dim Nominal			
PP         4.93±0.2           R1         20.62           R2         18.26           S         26.2±0.3           V         20.83+0/-1.25           W         2.1/2.5           Z         31.5 Max	2			
R1         20.62           R2         18.26           S         26.2±0.3           V         20.83+0/-1.25           W         2.1/2.5           Z         31.5 Max	Ρ			
R2         18.26           S         26.2±0.3           V         20.83+0/-1.25           W         2.1/2.5           Z         31.5 Max	PP	4.93±0.2		
S         26.2±0.3           V         20.83+0/-1.25           W         2.1/2.5           Z         31.5 Max	R1	20.62		
V         20.83+0/-1.25           W         2.1/2.5           Z         31.5 Max	R2	18.26		
W         2.1/2.5           Z         31.5 Max	S	26.2±0.3		
Z 31.5 Max	V	20.83+0/-1.25		
	W	2.1/2.5		
VV THREAD M15x1-6g	Z	31.5 Max		
	VV THREAD	M15x1-6g		


ORIENTATION : E

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

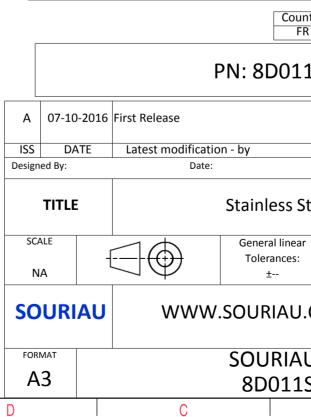

σ		A			
				4	
AS EXAMPLE				3	
any non-conformits which does not co er of the Parties or b adation, technical n untry Jurisc R 1SO1SE	mply with by a third part			2	
			MOD N°		
Steel Recepta	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° LS01SE-C			SHEET 1/2		
B		Α		J	
5	1				

	<u>т</u>	۵	<del>ار</del> (	m	D	0
		Contact Layout				Panel Cutout
4		01			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01	]		¥ ∑ –	
ယ	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
22						(professional recommendati Country FR PN: 8D0115
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011S0
	H	G	F	E	D	C

