

KEH-BS SERIES

THREE PHASE VERY HIGH PERFORMANCE EMI FILTER

BOOKSHELF TYPE DUAL STAGE DELTA CONFIGURATION

INTRODUCTION

High performance filters with bookshelf design are designed for motor drive applications requiring minimum space and convenient installation with very high performance at significant interference levels.

APPLICATION

- AC/DC Drives
- HVAC
- Robotics
- UPS

FEATURES

- Very High Performance
- Bookshelf Design
- Light Weight / Easy Installation
- Dual Stage

APPROVALS AND COMPLIANCE


- UL Recognised
- CSA Certified



STANDARD



NEW-DIN RAIL

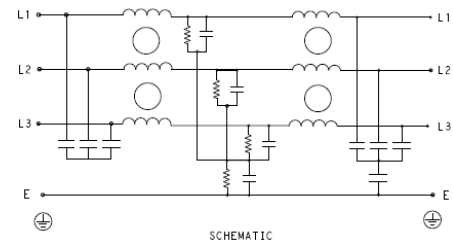

Specifications

Electrical Characteristics	
Maximum Continuous Operating Voltage	440/520VAC
Current Ratings	7A to 150A @40°C, Din Mount 7A to 100A @40°C
Operating Frequency	50/60Hz
High Potential Test Voltage -440VAC	Line to Ground 2632VDC for 1 Minute
	Line to Line 1892VDC for 1 Minute
High Potential Test Voltage -520VAC	Line to Ground 2856VDC for 1 Minute
	Line to Line 2236VDC for 1 Minute
Overload Capability	135% of Rated current for 15 minutes

KEH-BS Series


Three Phase Very High Performance EMI Filter

Functional Characteristics	
Operating Temperature Range	-25°C to +85°C
Climatic Category	25/85/21
Termination (Depends on Current Rating)	Shock Proof
Flammability Corresponding to	UL 94 V-0

Reference Standards	
Design Corresponding to	UL 60939-3 and CSA 22.2 No.8-13

Selection Table - Standard Version



TE Ordering Number	Part Number	Rated Current @40°C	Rated Voltage @40°C	Leakage Current (mA)	Weight (Kgs)	Termination 
2-1609969-0	7KEHD10ABSD	7A	440 VAC	10	2	4
2-1609969-1	16KEHD10ABSD	16A	440 VAC	10	2	4
2-1609969-2	30KEHD10ABSD	30A	440 VAC	10	2	4
2-1609969-3	42KEHD10ABSD	42A	440 VAC	15	3	10
2-1609969-4	55KEHD10ABSD	55A	440 VAC	15	3	10
2-1609969-5	75KEHD10ABSD	75A	440 VAC	15	3	16
2-1609969-6	100KEHD10ABSD	100A	440 VAC	15	4	25
2-1609969-7	120KEHD10ABSD	120A	440 VAC	15	4	50
2-1609969-8	150KEHD10ABSD	150A	440 VAC	15	4	50
5-1609969-0	7KEHD10BBSD	7A	520 VAC	10	2	4
5-1609969-1	16KEHD10BBSD	16A	520 VAC	10	2	4
5-1609969-2	30KEHD10BBSD	30A	520 VAC	10	2	4
5-1609969-3	42KEHD10BBSD	42A	520 VAC	15	3	10
5-1609969-4	55KEHD10BBSD	55A	520 VAC	15	3	10
5-1609969-5	75KEHD10BBSD	75A	520 VAC	15	3	16
5-1609969-6	100KEHD10BBSD	100A	520 VAC	15	4	25
5-1609969-7	120KEHD10BBSD	120A	520 VAC	15	4	50
5-1609969-8	150KEHD10BBSD	150A	520 VAC	15	4	50


KEH-BS Series

Three Phase Very High Performance EMI Filter


Selection Table - Din Rail Mount



NEW

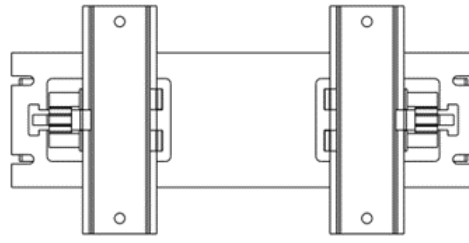

VERTICAL MOUNT



HORIZONTAL MOUNT

Note: Din Rail not supplied

TE Ordering Number	Catalog Number	Din Type	Rated Current @40°C	Rated Voltage @40°C	Leakage Current (mA)	Weight (Kgs)	Termination 
3-1609969-0	7KEHD10ABSDHM	HORIZONTAL	7A	440 VAC	10	2.1	4
3-1609969-1	16KEHD10ABSDHM	HORIZONTAL	16A	440 VAC	10	2.1	4
3-1609969-2	30KEHD10ABSDHM	HORIZONTAL	30A	440 VAC	10	2.1	4
3-1609969-3	7KEHD10ABSDVM	VERTICAL	7A	440 VAC	10	2.2	4
3-1609969-4	16KEHD10ABSDVM	VERTICAL	16A	440 VAC	10	2.2	4
3-1609969-5	30KEHD10ABSDVM	VERTICAL	30A	440 VAC	10	2.2	4
3-1609969-6	42KEHD10ABSDHM	HORIZONTAL	42A	440 VAC	15	3.2	10
3-1609969-7	55KEHD10ABSDHM	HORIZONTAL	55A	440 VAC	15	3.2	10
3-1609969-8	75KEHD10ABSDHM	HORIZONTAL	75A	440 VAC	15	3.2	16
3-1609969-9	100KEHD10ABSDHM	HORIZONTAL	100A	440 VAC	15	4.2	25
6-1609969-0	7KEHD10BBSDHM	HORIZONTAL	7A	520 VAC	10	2.1	4
6-1609969-1	16KEHD10BBSDHM	HORIZONTAL	16A	520 VAC	10	2.1	4
6-1609969-2	30KEHD10BBSDHM	HORIZONTAL	30A	520 VAC	10	2.1	4
6-1609969-3	7KEHD10BBSDVM	VERTICAL	7A	520 VAC	10	2.2	4
6-1609969-4	16KEHD10BBSDVM	VERTICAL	16A	520 VAC	10	2.2	4
6-1609969-5	30KEHD10BBSDVM	VERTICAL	30A	520 VAC	10	2.2	4
6-1609969-6	42KEHD10BBSDHM	HORIZONTAL	42A	520 VAC	15	3.2	10
6-1609969-7	55KEHD10BBSDHM	HORIZONTAL	55A	520 VAC	15	3.2	10
6-1609969-8	75KEHD10BBSDHM	HORIZONTAL	75A	520 VAC	15	3.2	16
6-1609969-9	100KEHD10BBSDHM	HORIZONTAL	100A	520 VAC	15	4.2	25

KEH-BS Series

Three Phase Very High Performance EMI Filter

Connectors Cross Section

	4	10	16	25	50
Wire Section (mm ²)	4mm ²	10 mm ²	16 mm ²	25 mm ²	50 mm ²
Wire Section (AWG)	12AWG	8 AWG	6 AWG	4 AWG	1/0 AWG
Wire Stripping	max 10mm	max 13.5 mm	max 17 mm	max 17 mm	max 20 mm
Max Recommended Torque	0.5 Nm/ 4.5 in.lbs	1.2 Nm/ 10.8 in.lbs	2-2.2 Nm/ 18-19.8 in.lbs	2 Nm/ 18 in.lbs	6 Nm/ 54 in.lbs

Insertion Loss (Typical) – Measured in Closed 50Ω System

		Common Mode 50Ω/50Ω								
		Frequency in MHz								
		0.01	0.05	0.15	0.5	1	3	5	10	30
Current Rating	7A	70	72	75	80	75	60	50	48	19
	16A	73	70	76	81	78	70	52	48	19
	30A	42	46	69	77	82	64	57	47	39
	42A	45	50	65	75	80	65	56	42	32
	55A	35	41	67	76	77	62	56	47	29
	75A	35	36	62	72	70	65	50	47	30
	100A	30	32	65	68	70	62	52	40	32
	120A	18	21	50	54	55	48	42	34	22
	150A	14	21	53	58	53	45	41	34	20


		Differential Mode 50Ω/50Ω								
		Frequency in MHz								
		0.01	0.05	0.15	0.5	1	3	5	10	30
Current Rating	7A	45	50	33	47	50	48	38	22	65
	16A	30	45	33	47	49	65	50	22	65
	30A	18	24	57	81	87	60	45	17	25
	42A	18	24	50	70	84	60	45	19	26
	55A	22	23	25	82	78	59	46	23	26
	75A	25	24	28	65	75	60	46	26	24
	100A	26	28	30	62	72	60	46	26	24
	120A	28	30	60	52	43	32	26	20	19
	150A	33	38	64	51	43	32	26	20	19

KEH-BS Series


Three Phase Very High Performance EMI Filter

Common Mode Insertion Loss (Typical in dB - Refer to table above)


7A

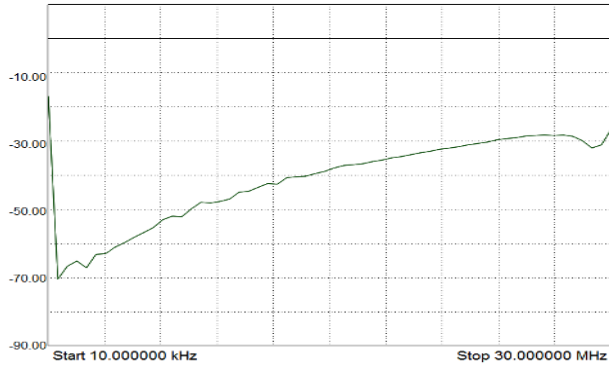


16A

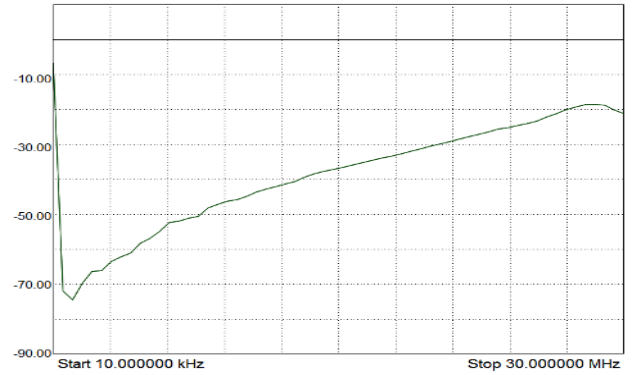

30A

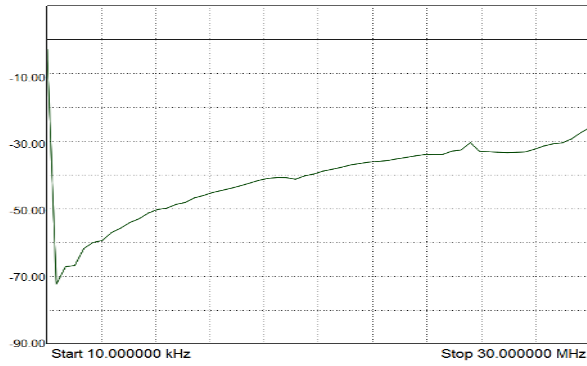


42A

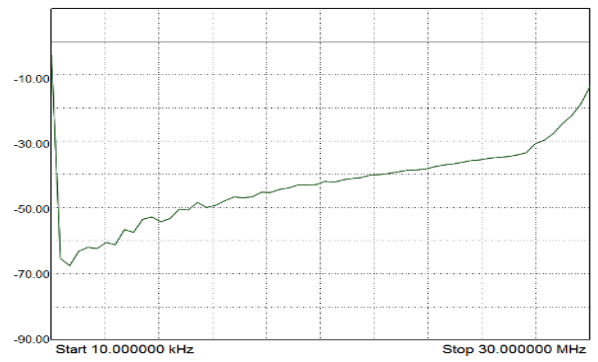

55A



75A

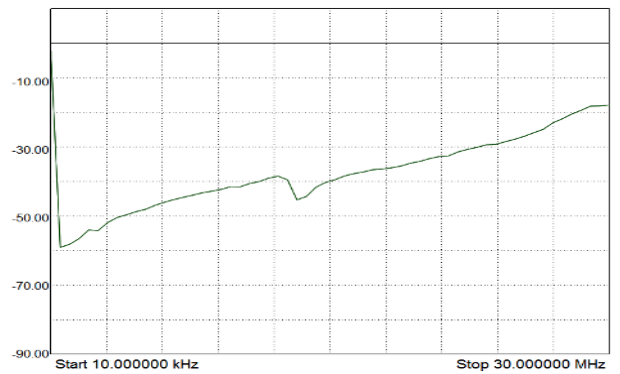


KEH-BS Series

Three Phase Very High Performance EMI Filter


100A



120A

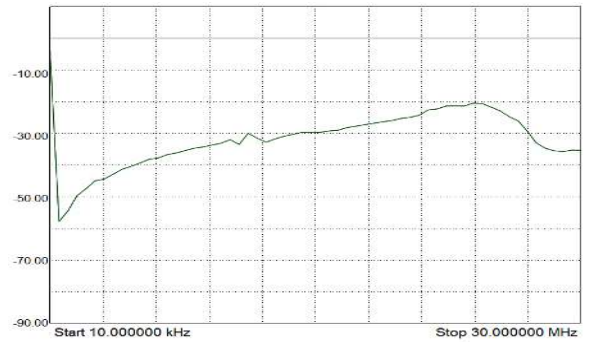

150A

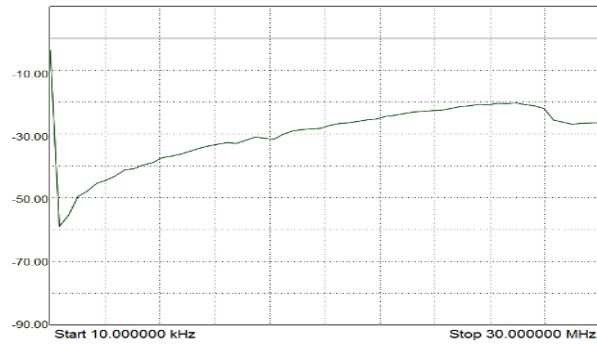

KEH-BS Series

Three Phase Very High Performance EMI Filter

Case Dimensions - Standard Version


7A Shock Proof Type	16A Shock Proof Type
<p>Technical drawing of the 7A Shock Proof Type EMI filter. It shows a side view of the filter with a length of 207.2 ± 0.50 and a width of 38 ± 0.2. The mounting rail width is 4.5. The front panel has a width of 65 ± 0.50 and a height of 95 ± 1. The distance between the front and back panels is 11.2 REF. The total width of the unit is 198 ± 1. The bottom panel has a width of 225.</p>	<p>Technical drawing of the 16A Shock Proof Type EMI filter. It shows a side view of the filter with a length of 287.2 ± 0.50 and a width of 38 ± 0.2. The mounting rail width is 4.5. The front panel has a width of 65 ± 1 and a height of 95 ± 1. The distance between the front and back panels is 11.2 REF. The total width of the unit is 275 ± 1. The bottom panel has a width of 305.</p>
30A & 42A Shock Proof Types	55A Shock Proof Type
<p>Technical drawing of the 30A & 42A Shock Proof Types EMI filter. It shows a side view of the filter with a length of 314 ± 0.50 and a width of 49.1 ± 0.2. The mounting rail width is 5.4. The front panel has a width of 70 and a height of 110 ± 1. The distance between the front and back panels is 11.2 REF. The total width of the unit is 300 ± 1. The bottom panel has a width of 330 ± 1.</p>	<p>Technical drawing of the 55A Shock Proof Type EMI filter. It shows a side view of the filter with a length of 294 ± 0.5 and a width of 59.1 ± 0.2. The mounting rail width is 5. The front panel has a width of 85 ± 1 and a height of 105 ± 1. The distance between the front and back panels is 14.5 REF. The total width of the unit is 280 ± 1. The bottom panel has a width of 310 ± 1.</p>
75A Shock Proof Type	100A Shock Proof Type
<p>Technical drawing of the 75A Shock Proof Type EMI filter. It shows a side view of the filter with a length of 334 ± 0.5 and a width of 64.0 ± 0.2. The mounting rail width is 5. The front panel has a width of 90 ± 1 and a height of 150 ± 1. The distance between the front and back panels is 18.8 REF. The total width of the unit is 320 ± 1. The bottom panel has a width of 350 ± 1.</p>	<p>Technical drawing of the 100A Shock Proof Type EMI filter. It shows a side view of the filter with a length of 334 ± 0.5 and a width of 74. The mounting rail width is 5. The front panel has a width of 100 ± 1 and a height of 170 ± 1. The distance between the front and back panels is 18.8 REF. The total width of the unit is 320 ± 1. The bottom panel has a width of 350 ± 1.</p>

KEH-BS Series

Three Phase Very High Performance EMI Filter

Case Dimensions - Standard Version

125A to 150A Shock Proof Types

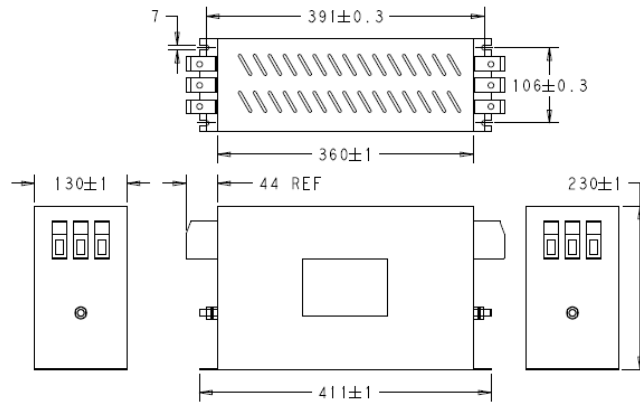


KEH-BS Series


Three Phase Very High Performance EMI Filter

Case Dimensions - Din Rail Mount

7A Shock Proof Type - Horizontal Mount

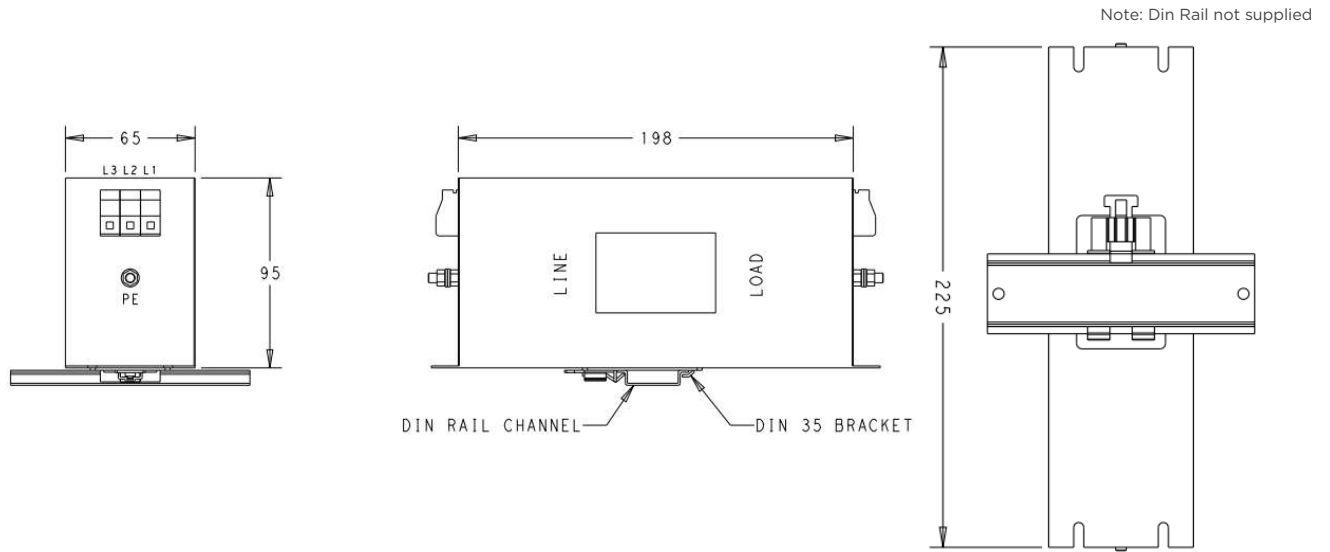

7A Shock Proof Type - Vertical Mount

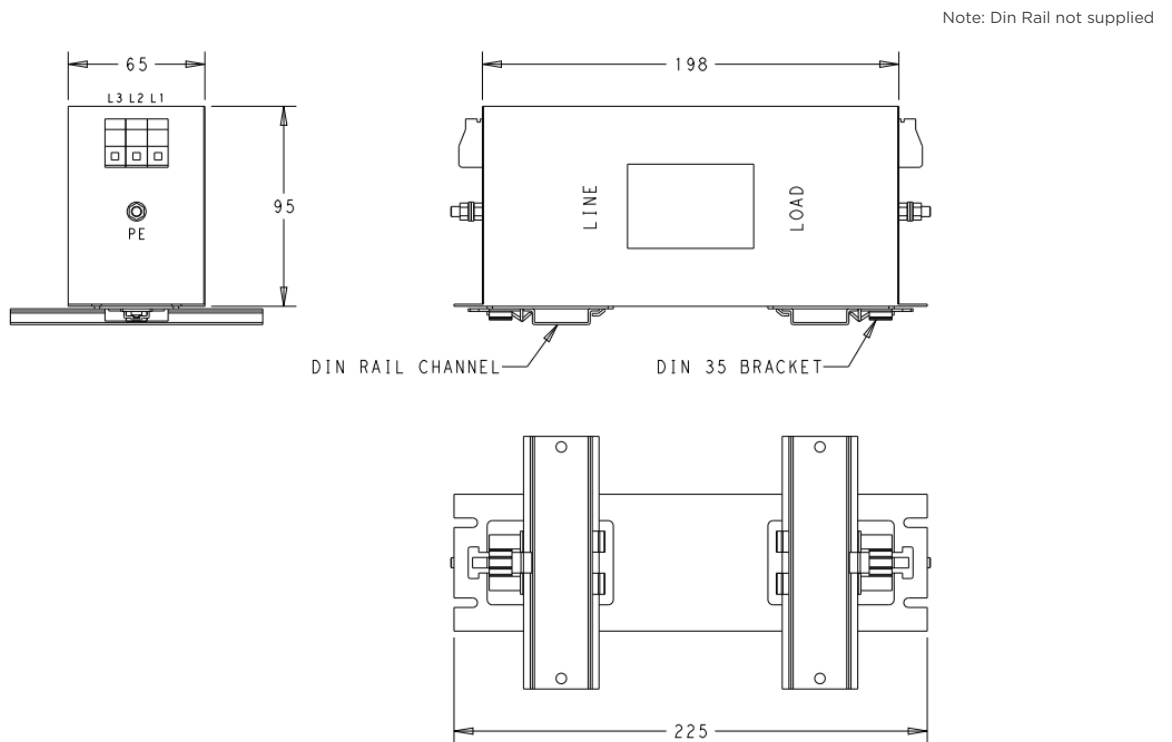


KEH-BS Series

Three Phase Very High Performance EMI Filter

Case Dimensions - Din Rail Mount


16A Shock Proof Type - Horizontal Mount

Note: Din Rail not supplied

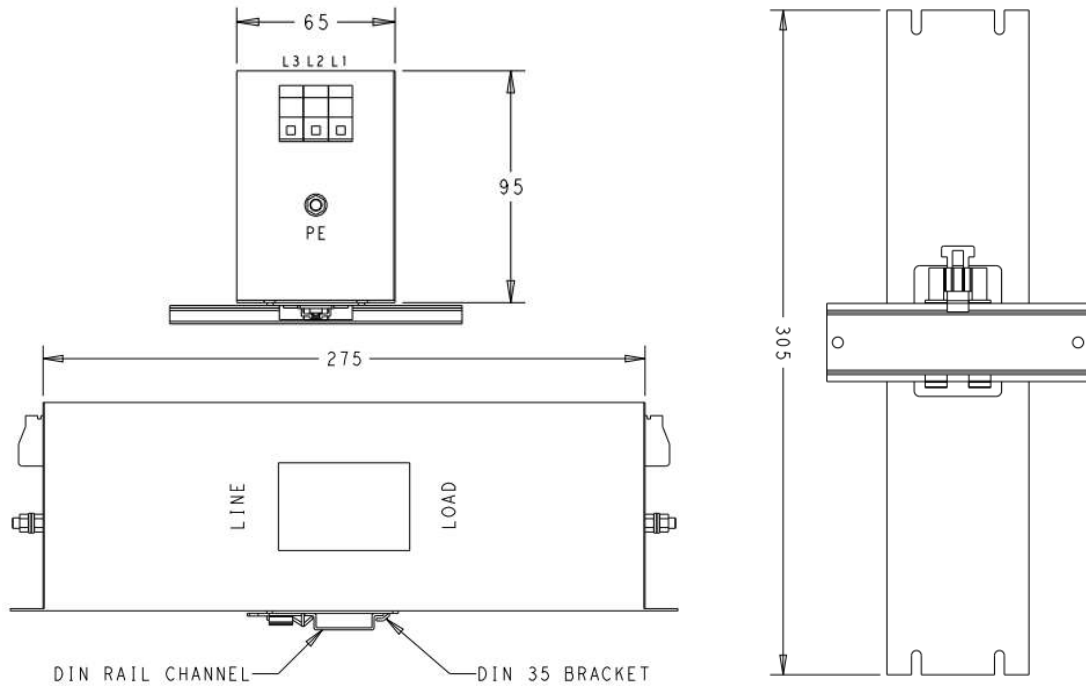

16A Shock Proof Type - Vertical Mount

Note: Din Rail not supplied

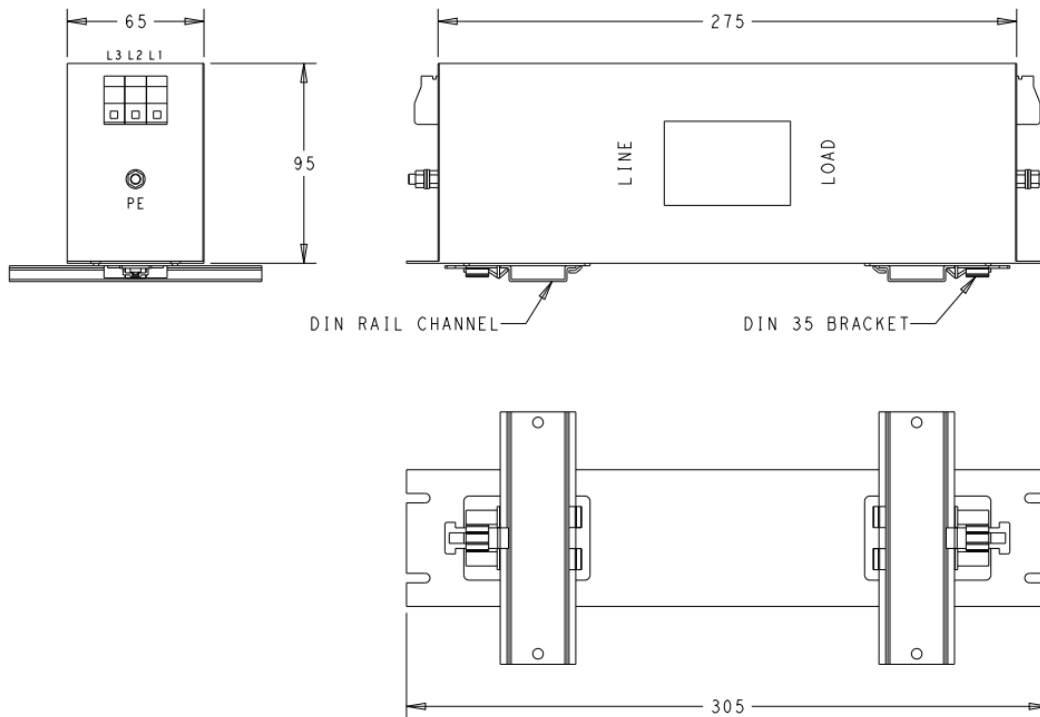


KEH-BS Series

Three Phase Very High Performance EMI Filter

Case Dimensions - Din Rail Mount


30A Shock Proof Type - Horizontal Mount

Note: Din Rail not supplied

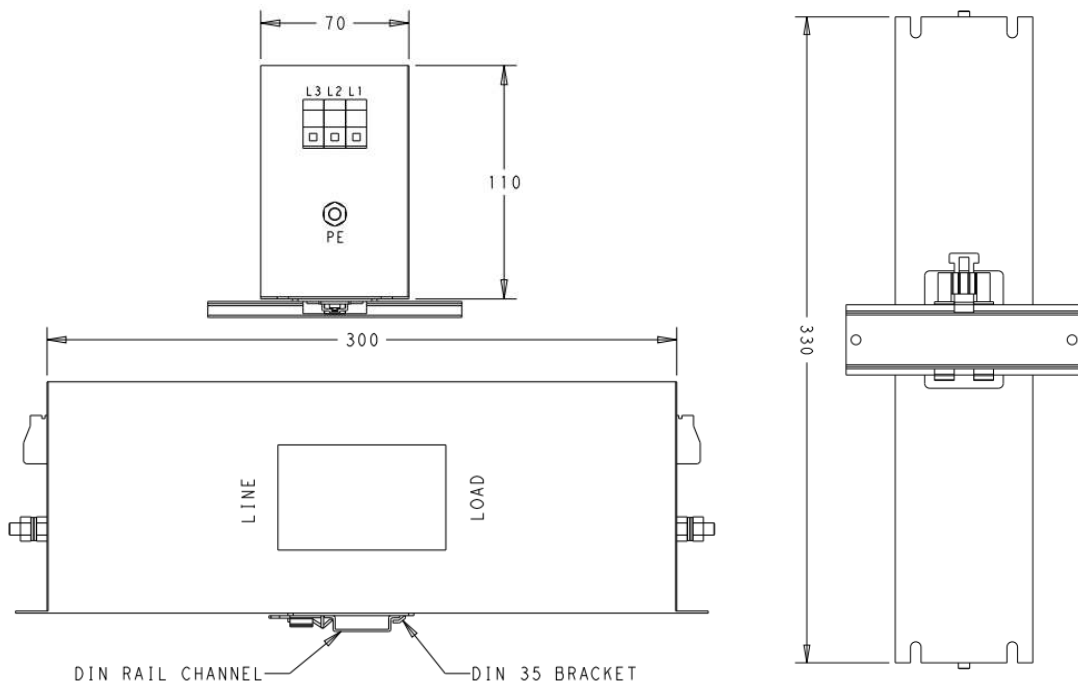

30A Shock Proof Types - Vertical Mount

Note: Din Rail not supplied

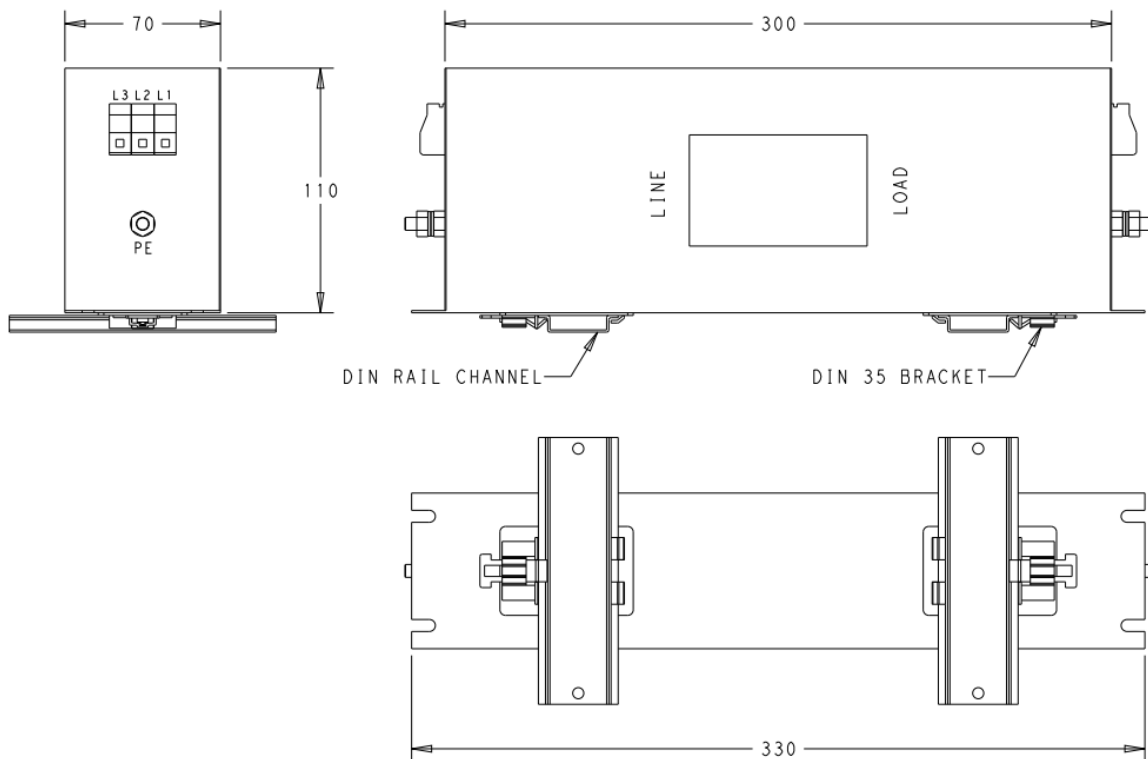


KEH-BS Series

Three Phase Very High Performance EMI Filter

Case Dimensions - Din Rail Mount


42A Shock Proof Type - Horizontal Mount

Note: Din Rail not supplied

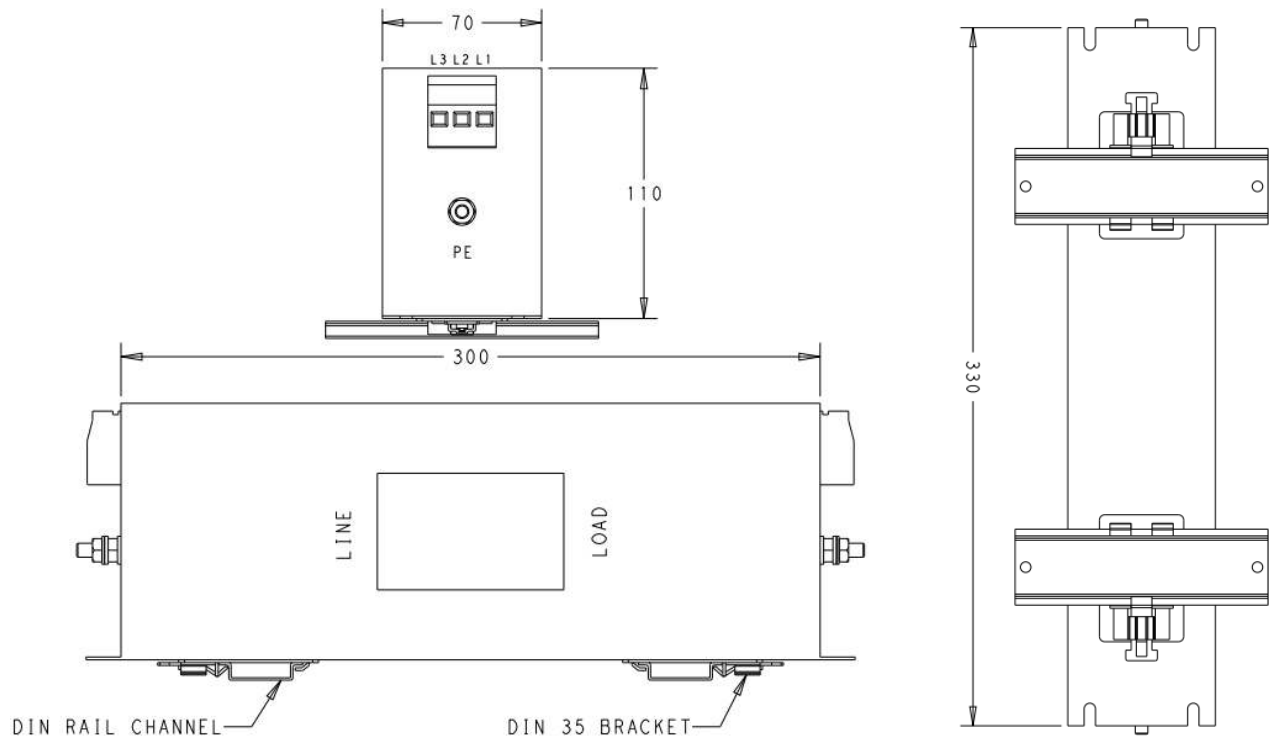

55A Shock Proof Type - Horizontal Mount

Note: Din Rail not supplied

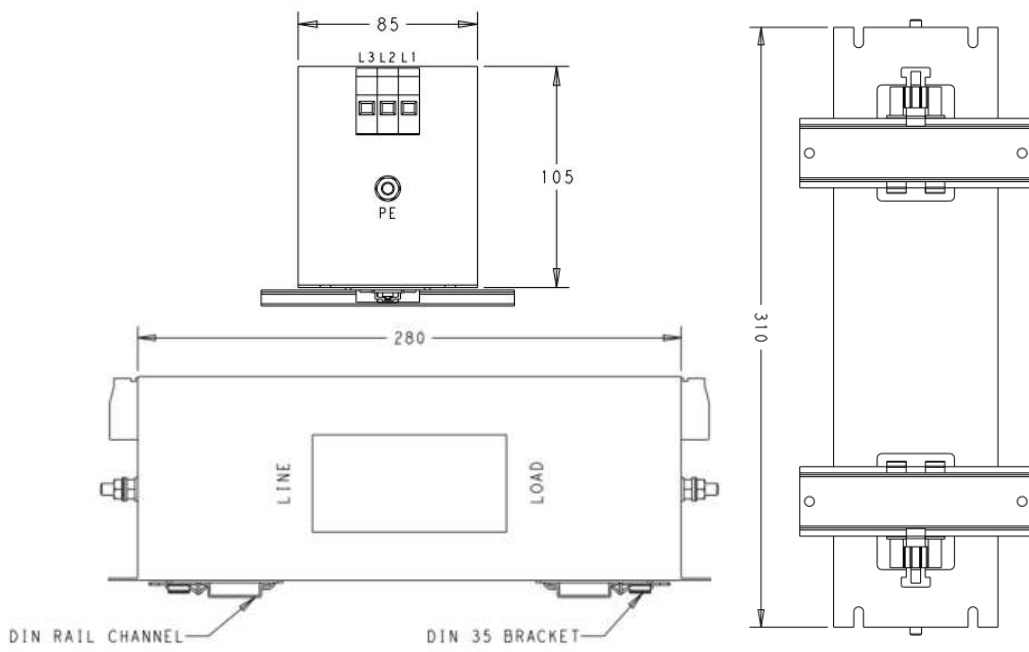


KEH-BS Series

Three Phase Very High Performance EMI Filter

Case Dimensions - Din Rail Mount


75A Shock Proof Type - Horizontal Mount

Note: Din Rail not supplied

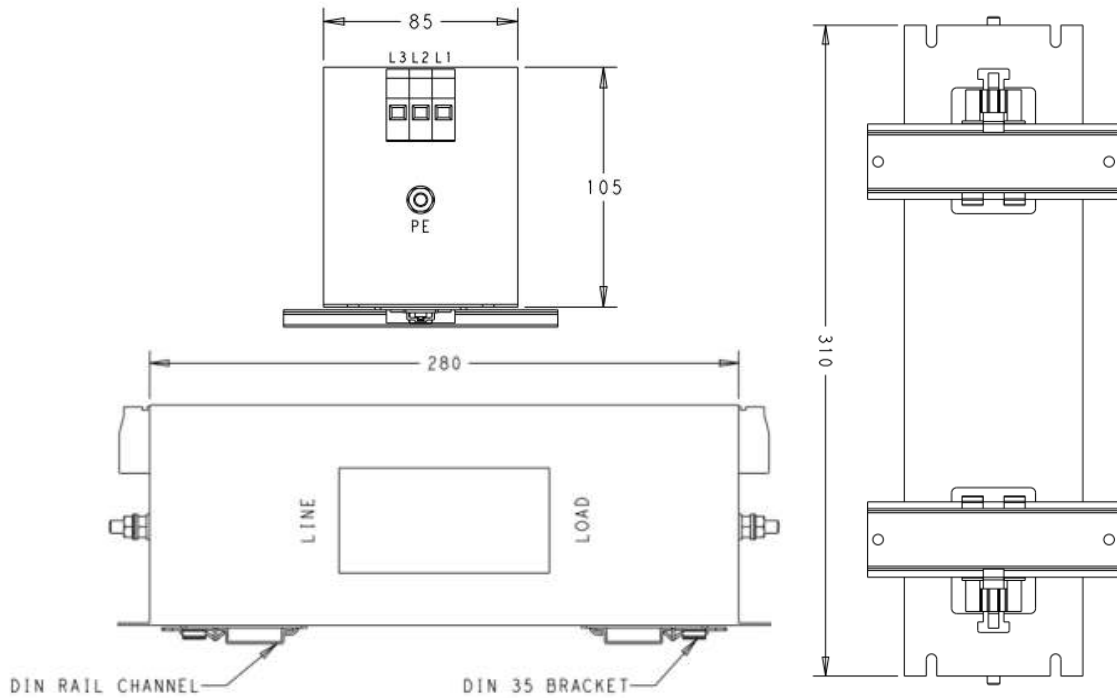


100A Shock Proof Type - Horizontal Mount

Note: Din Rail not supplied

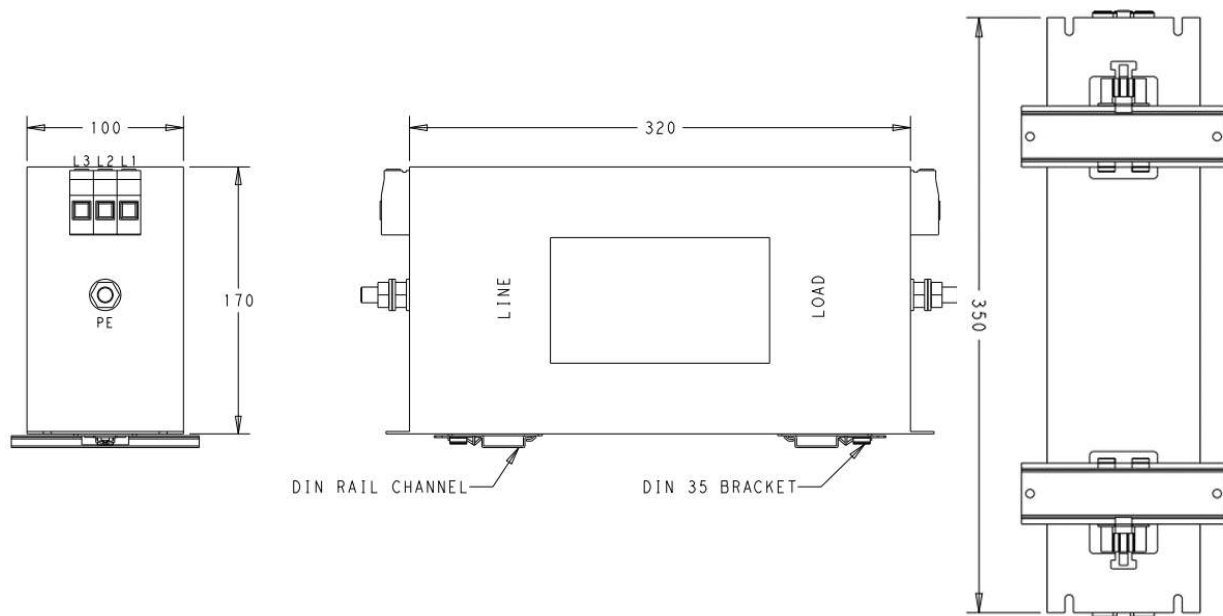

All dimensions in mm; Tolerances according: ISO2768-m

HOW TO ORDER

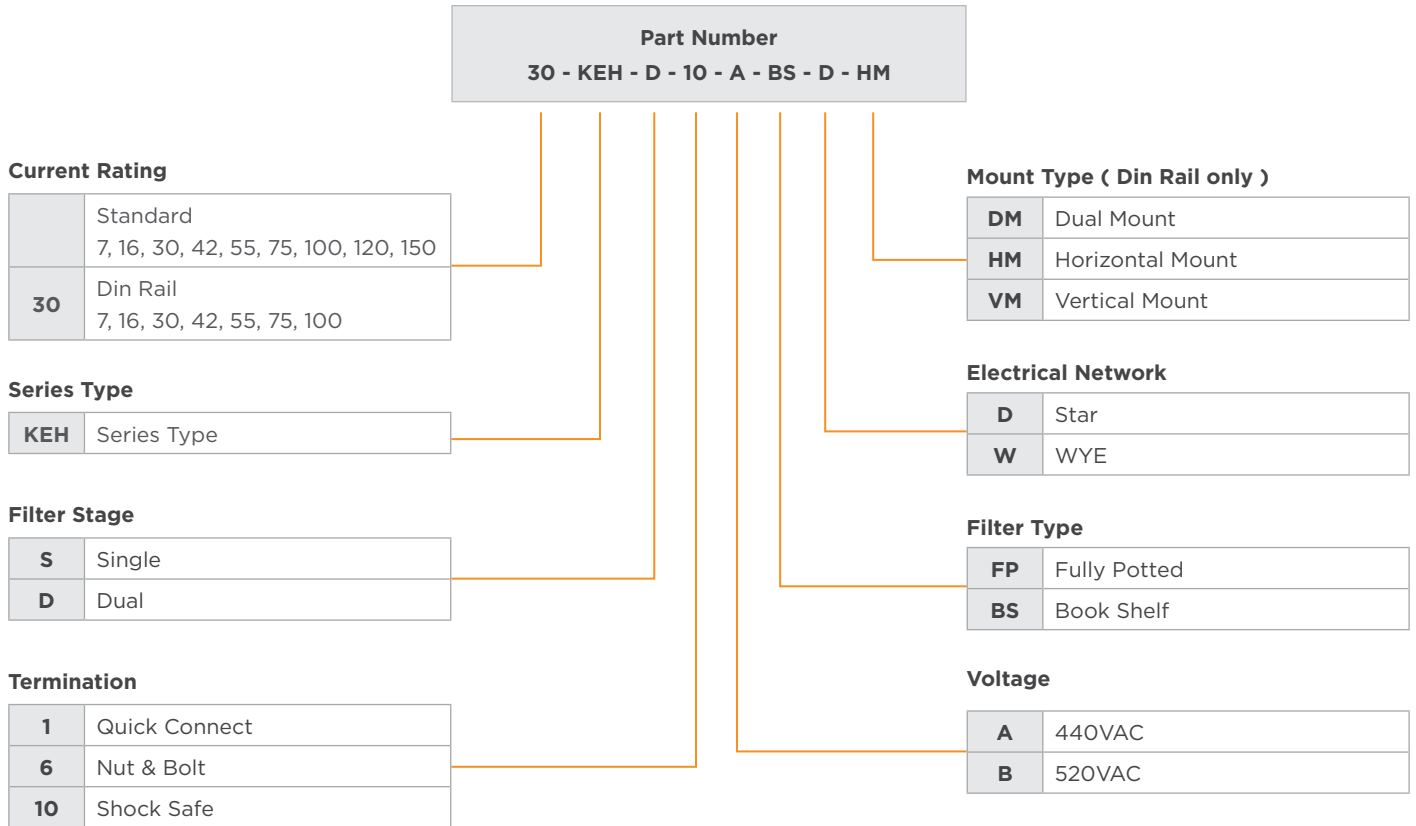

te.com

©2022 TE Connectivity. All Rights Reserved.

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

12/22 ED