
т	D	г	m	0





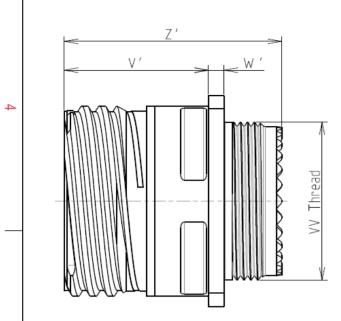

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	_∶ -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 10.1 g ± 10%

8D 0

G

11

J

98

А

F

Е


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-98



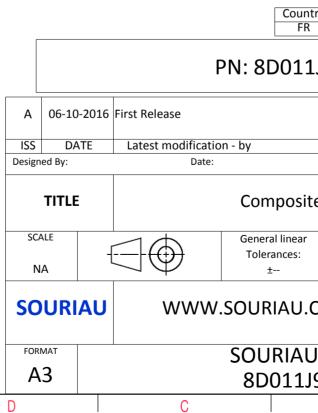

	σ		А			
		I				
					4	
					3	
	MPLE					
any non-conformity or damage which does not comply with or of the Parties or by a third party dation, technical notice.)						
intry R	Jurisdiction & Control List Not Listed				2	
.1J9	1J98AE					
		CUSTOME		MOD N°	·	
ite l	customer drawing e Receptacle 8D series					
ar	NPRDS / PROJECT					
			59	perty of	1	
I.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
198	BAE-C		Δ	1/2	J	
	В	I	A			

		۵	٣	m	D	0	
		Contact Layout					Panel Cutout
4	-×($ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & $				SQUARE FLANGE RECEPTACLE (T REAR MOUNTING	
	Cont positi II A B C C D E F Shell Arrangement Numb size no. conta	Jon (mm) X-axis (mm) Y-axis (mm) +.000 (0.00) +.130 (3.30) +.130 (3.30) +.000 (0.00) +.005 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 130 (3.30) +.000 (0.00) +.000 (0.00) +.000 (0.00) er of Size Service Contact Supersedes	1		22 22		ØI
ω	11 -98 6]				Dim ØA ØAA R1 ØT
						due to a use o the Specifications i	
22							N: 8D011J
					A 06-10-20 ISS DATE Designed By:	16 First Release Latest modification Date:	
<u> </u>					SCALE NA		Composite General linear Tolerances: ±
					FORMAT A3		SOURIAU.CO SOURIAU 8D011J9
,	Н	G	F	E	D	С	

