

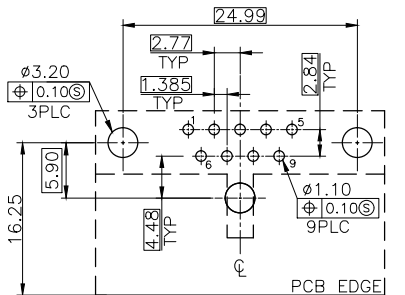


- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC (SEE TABLE), UL 94V-0
COLOR: BLACK(426C) OR GREEN(322C)
 - CONTACTS: BRASS, T=0.20
 - BOARDLOCK: BRASS, T=0.5
 - SHELL: STEEL, T=0.4
 - SCREW: BRASS
 - FINISH:
 - CONTACT:
 - GOLD PLATING (SEE TABLE) ON CONTACT AREA, 2.54μm [100μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS, 1.27μm [50μ"] MIN. NICKEL UNDERPLATED OVERALL.
 - BOARDLOCK:
 - 2.54μm [100μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS, 1.27μm [50μ"] MIN. NICKEL UNDERPLATED OVERALL.
 - SHELL: 1.27μm [50μ"] MIN. NICKEL PLATING
 - SCREW: 1.27μm [50μ"] MIN. NICKEL PLATING
 - WAVE SOLDER CAPABLE TO 265°C PER TE SPEC. 109-202, CONDITION B.
 - THREADED INSERTS AND SCREWLOCKS MUST WITHSTAND TIGHTEN TORQUE: 6.0 Kgf-cm OR (IN-LBS)MAX.
 - THREADED INSERTS AND SCREWLOCKS MUST WITHSTAND LOOSEN TORQUE: 1Kgf-cm OR (IN-LBS)MIN.

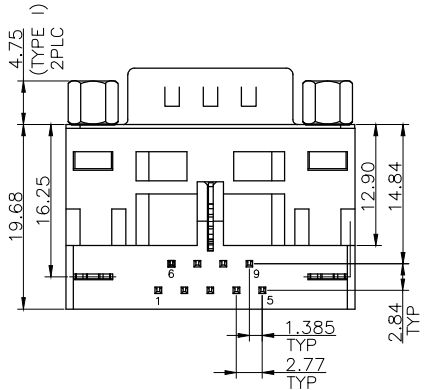


REFERENCE P.C.B LAYOUT(OPTION I)
 TOLERANCE: ±0.05
 (TOP VIEW)

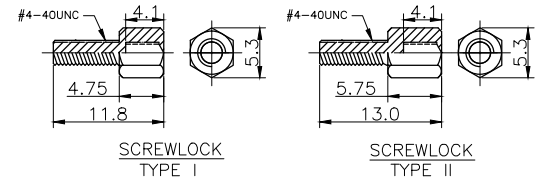

SCREWLOCK TYPE I
 SCREWLOCK TYPE II

EOL	TYPE II	4.25	0.508um (20u")	PBT	GREEN	7-1775414-4
EOL	TYPE II	5.92	GOLD FLASH	PBT	GREEN	5-1775414-3
EOL	TYPE I	4.25	GOLD FLASH	PBT	GREEN	7-1775414-3
EOL	TYPE I	4.25	0.508um (20u")	PBT	GREEN	7-1775414-2
EOL	TYPE I	5.92	GOLD FLASH	PA 6T	GREEN	6-1775414-2
EOL	TYPE I	5.92	GOLD FLASH	PA 6T	BLACK	6-1775414-1
EOL	TYPE I	5.92	GOLD FLASH	PBT	GREEN	5-1775414-2
				PBT	BLACK	5-1775414-1
				PA 6T	GREEN	1-1775414-2
				PA 6T	BLACK	1-1775414-1
				PBT	GREEN	1775414-2
				PBT	BLACK	1775414-1
SCREW	DIM. A		GOLD PLATING	HSG MATERIAL	HSG COLOR	PART NUMBER

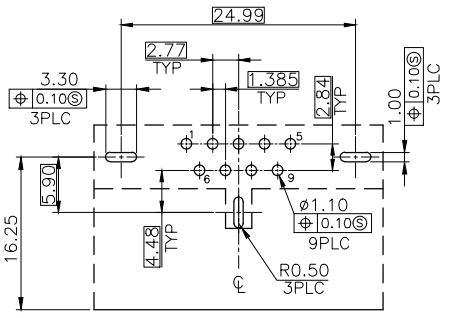

REFERENCE P.C.B LAYOUT (OPTION II)
 TOLERANCE: ±0.05
 (TOP VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S. CHIEN	18MAY2009	TE Connectivity D-SUB, HIGH RISE, 9 PLUG, H=25.33mm, DIP TYPE	
DIMENSIONS: MM		CHK	S. CHIEN	18MAY2009		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	W. KODAMA	18MAY2009		
0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± 3'		PRODUCT SPEC	108-57584			
MATERIAL SEE NOTE		FINISH	SEE NOTE		QUALIFICATION TEST REPORT	501-57680
		WEIGHT		13.5 GRAMS	SIZE	A3
		CUSTOMER DRAWING		DRAWING NO		C=1775414
		SCALE		SHEET		1 of 3
				REV		C2

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE


DWN

APVD

SEE SHEET 1.



OBSOLETE

EOL	0.381um (15u")	PA6T	GREEN	8-1775414-4
EOL	GOLD FLASH	PA6T	GREEN	8-1775414-3
EOL	GOLD FLASH	PBT	GREEN	8-1775414-2
	GOLD PLATING	HSG MATERIAL	HSG COLOR	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	STE TE Connectivity				
DIMENSIONS: MM		CHK					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME				
 <ul style="list-style-type: none"> 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± 3' 		PRODUCT SPEC	D-SUB, HIGH RISE, 9 PLUG, H=25.33mm, DIP TYPE				
		QUALIFICATION TEST REPORT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		MATERIAL	FINISH	WEIGHT	A3 00779 C=1775414		
		SEE NOTE	SEE NOTE	CUSTOMER DRAWING	SCALE	SHEET	REV

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

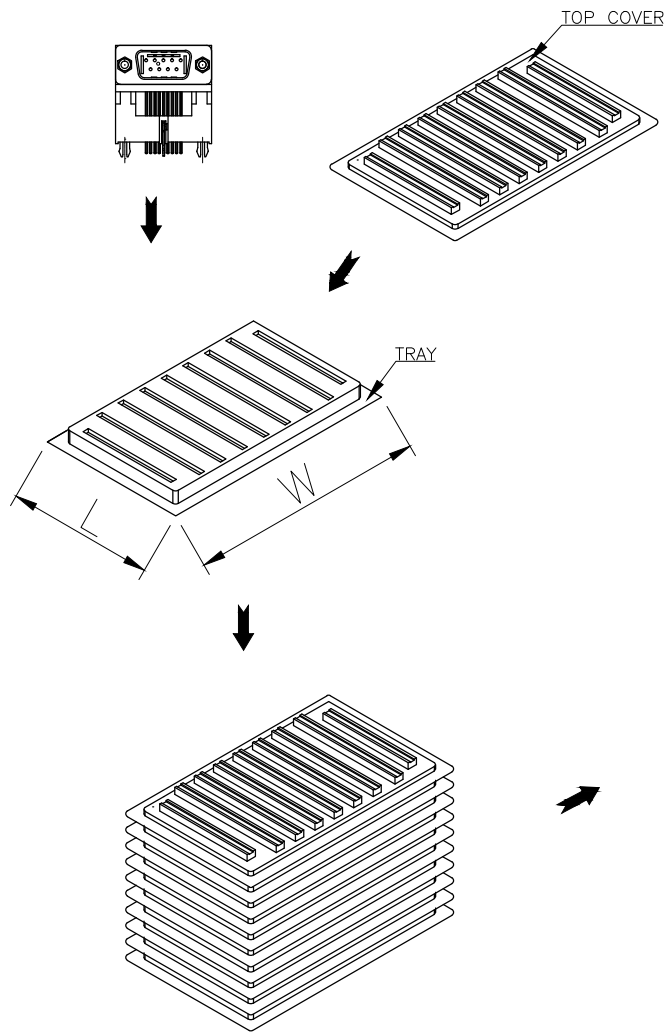

- NOTES:
- DIMENSION:
 - 1.1 TRAY: L=285, W=250, H=29
 - 1.1 SHIPPING BOX: L=295, W=260, H=230
 - QUANTITY:
 - 2.1 PRIMARY PACKING: 70 PCS/TRAY
 - 2.2 SECONDARY PACKING: 8 TRAY/BOX (560PCS)
 - BOX WEIGHT:
 - 3.1 NET WEIGHT: 7.56 Kg
 - 3.2 GROSS WEIGHT: 9 Kg

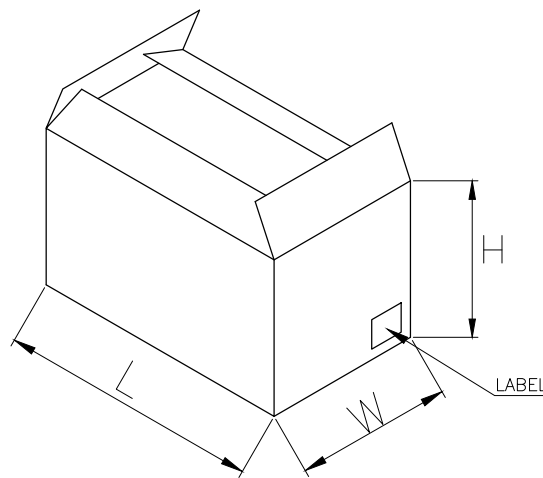

70	8	560	9	7.56
PCS/ TRAY	TRAY/ BOX	QT'Y/ PCS	G/W (Kg)	N/W (Kg)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	STE TE Connectivity	
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME	
0 PLC ± -		PRODUCT SPEC	D-SUB, HIGH RISE, 9 PLUG, H=25.33mm, DIP TYPE	
1 PLC ± -		APPLICATION SPEC	SIZE	RESTRICTED TO
2 PLC ± -		WEIGHT	A3	
3 PLC ± -		CUSTOMER DRAWING	CAGE CODE	
4 PLC ± -			00779	
ANGLES ± -			DRAWING NO	
FINISH			C=1775414	
MATERIAL				
		SCALE	SHEET	REV
			3 of 3	C2