

AVRGT 1

2

3

4

5

6

DATE	EDITION	CHANGE CONTENT	RESPONSIBLE
A1	2021.07.12		Jianfeng-chen

63

14

56

28



3M double-side tape



3M Type 1PCS

Black wire Negative-Ground -

Red wire 12V + IN

Out - USA-A Females




Butt-splice



Equivalent 2PCS

In-Line 3A fuse

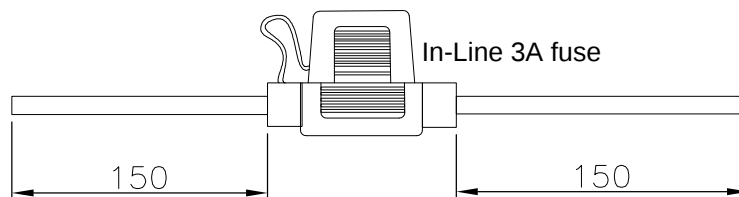

1PCS

Self tap screws



Screws 2PCS

NOTE2:

- ELECTRICAL TEST;
(1-1).100% OPEN, SHORT&MISWIRE;
(1-2).INSULATION RESISTANCE:DC 300V, 0.1s, 5M Ω Min;
(1-3).CONTACT RESISTANCE:5 Ω Max;
(1-4).WITHSTAND VOLTAGE:AC 100V, 0.1s, 5mA Max.
- PRODUCTS MUST COMPLY WITH THE COMPANY ENVIRONMENTAL MATERIAL MANAGEMENT STANDARD RoHS REQUIREMENTS.

pn: AVRGT-12V-USBAF-2 rev7-13-21



(DR)	TOLERANCES		(TITLE)	
BECK_CHEN	50-100mm	± 3	12V to USB-A Fast Charge Module	
	101-300mm	± 5		
	301-500mm	± 8		
	501-1000mm	± 10		
(APPD) Andy B	1001-1500mm	± 15	(DWG NO)	
	(ANGLES)		033. QY. USB	
	X:	$\pm 10.0^\circ$		
	(SCALE)		(UNITS)	(SIZE)
	NA	MM	A4	SHEET
			(REV)	(DATE)
			A1	2021.07.12

1

2

3

4

5

6 AVRGT