


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00575	Connector, USB A 2.0 plug, molding style, 180°, nickel plated shell, white insulator	1	
2	50-00577	Connector, USB A 2.0 receptacle, molding style, 180°, nickel plated shell, white insulator	1	
3	30-00873	Wire, 4C, 1PR 28 AWG, 2C 26 AWG, UL2725, 30V, 80C, 4.3 mm, shielded, VW-1, PVC, 79A, USB 2.0, white	1	
4	24-00210	Overmold, plug, USB A, slim design for aluminum shell	1	PVC, white
5	24-00217	Overmold, jack, USB A, slim design for aluminum shell	1	PVC, white
6	55-00106	USB A plug aluminum shell, 13x13.5x5.9 mm, silver	1	
7	55-00107	USB A jack aluminum shell, 22.5x14.7x7 mm, silver	1	

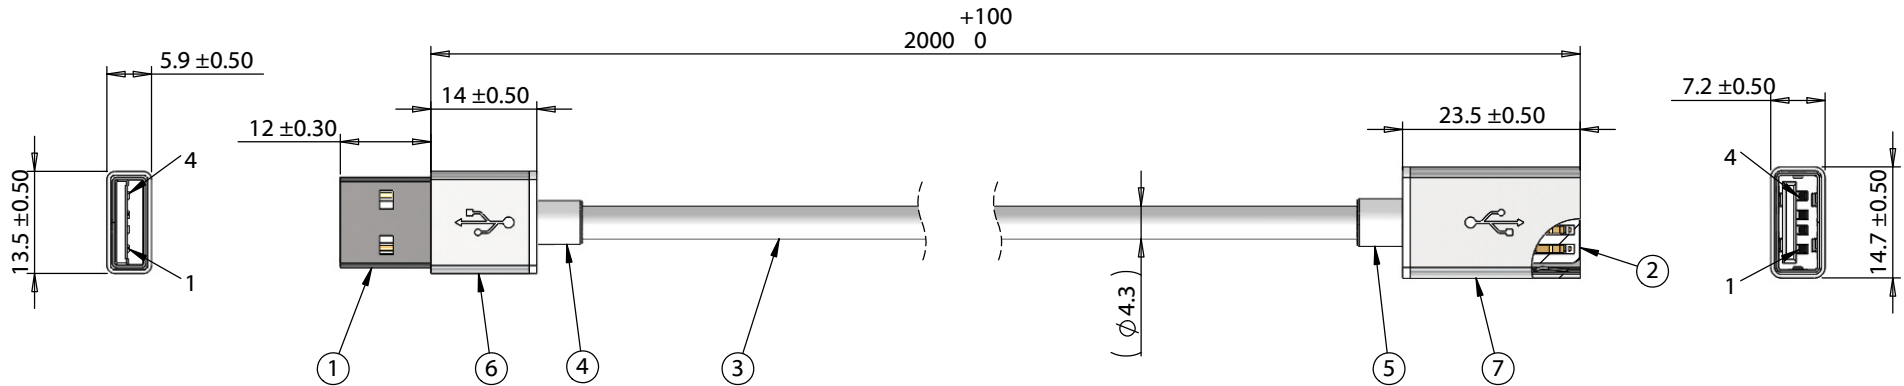

Wiring diagram		
50-00575	Wire Color	50-00577
1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Drain & Shield	Shell

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared: RS <small>Digitally signed by RS Date: 2018.11.01 16:32:29 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	1/16/2018	Initial release	Verified: PS <small>Digitally signed by PS Date: 2018.11.02 09:46:36 -07'00'</small>	RoHS compliant	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 2000 mm, 50-00575 USB A plug to 50-00577 USB A receptacle, 26/28 AWG, 30-00873 wire, white	
				Size: A	Part number: 10-02347
				Scale: 1:1	Sheet 1 of 1

5

4

3

2

1