

Multilayer High-Current Ferrite Chip Beads

Special Features

- High current capacity
- Reduce high frequency noise interference
- Multilayer construction for high reliability
- Solder coated terminals for wave and reflow solder
- Operating temperature: -55 to +125°C

Notes

* Current to cause 20°C maximum temperature rise


** Crosses to the following Bourns Series

@ www.Bourns.com

PMH0603 link to Bourns [MH1608](#)

PMH0805 link to Bourns [MH2029](#)

PMH1206 link to Bourns [MH3261](#)

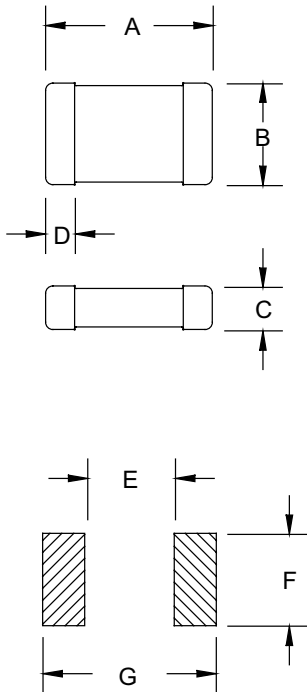

Pad Layout

PMH Series			
Part Number	Z (Ω) ±25% @100MHz	DCR (Ω) Max.	I, DC* (A)
PMH0603-100	10	0.01	5
PMH0603-300	30	0.03	3
PMH0603-600	60	0.04	3
PMH0603-101	100	0.05	2.5
PMH0603-121	120	0.05	2.5
PMH0603-151	150	0.1	2
PMH0603-221	220	0.1	2
PMH0603-301	300	0.1	2
PMH0603-601	600	0.2	1
PMH0805-100	10	0.01	6
PMH0805-300	30	0.015	6
PMH0805-400	40	0.02	5
PMH0805-600	60	0.02	5
PMH0805-800	80	0.02	5
PMH0805-101	100	0.02	5
PMH0805-121	120	0.02	5
PMH0805-201	200	0.04	3
PMH0805-221	220	0.04	3
PMH0805-301	300	0.15	1
PMH0805-401	400	0.1	2
PMH0805-601	600	0.1	2
PMH0805-102	1000	0.3	.5
PMH1206-300	30	0.03	4
PMH1206-500	50	0.03	4
PMH1206-700	70	0.03	4
PMH1206-800	80	0.03	4
PMH1206-900	90	0.04	3
PMH1206-101	100	0.04	3
PMH1206-121	120	0.03	3
PMH1206-501	500	0.1	1.5
PMH1206-601	600	0.10	1.5

Also available as RoHS compliant.

Dimensions: mm

Chip Size	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Reel
PMH0603	1.60	0.80	0.80	0.3	0.6	0.8	2.6	4000
PMH0805	2.00	1.25	0.90	0.5	1.0	1.0	3.0	4000
PMH1206	3.20	1.60	1.10	0.5	2.2	1.4	4.4	3000

J.W. Miller
MAGNETICS

306 E. Alondra Blvd. Gardena, CA 90247-1059 • Phone (310) 515-1720 • FAX (310) 515-1962

www.jwmiller.com

REV. 08/06 3.3