

# LED Down Light

## JET Series



### JET Series

Our JET Series LED Down Light is economical and is equipped with a smooth trim that fits most manufacturer's 5" and 6" recessed can-style housings. It utilizes adjustable torsion springs, can be dimmed down to 10%, and maintains 70% light output after 35,000 hours of use. This makes it perfect for applications such as multi-family residences, retail shops and offices. An E26 adapter is included.

- Compatible with IC and non-IC rated air-tight recessed housings and is Energy Star qualified
- Illuminates down to 10% with most electronic dimmers
- Built-in driver
- Durable thermoplastic construction
- Long life, 35,000 Hour LEDs at L70 reduces life cycle maintenance costs
- Energy Star Certified

# LED Down Light

## JET Series

### JET Series

SKU #	Model #	Watts	Lumens	CCT	Fits	Dimmable	Certifications
150567	BLT-DL6DWP-18W	18W	1200Lm	5000K	5"-6"	Yes	UL & ES
151064	BLT-DL6DWP-18W-30K	18W	1200Lm	3000K	5"-6"	Yes	UL & ES



### Specifications


VIEWING ANGLE	90°
INPUT VOLTAGE	100 -277V AC, 50/60HZ
DIMMABLE	YES
POWER FACTOR	>0.7
IP RATING	IP65

OPERATING TEMPRATURE	APPLICATION	BEAM ANGLE	CRI	DIMMABLE
-20°F TO 45°F	Indoor	70°	>90	Yes

### Warranty & Qualification

WARRANTY	UL LISTED	ENERGY STAR
5 Year Limited	Yes	Yes

### CORRELATED COLOR TEMPERATURE (CCT)

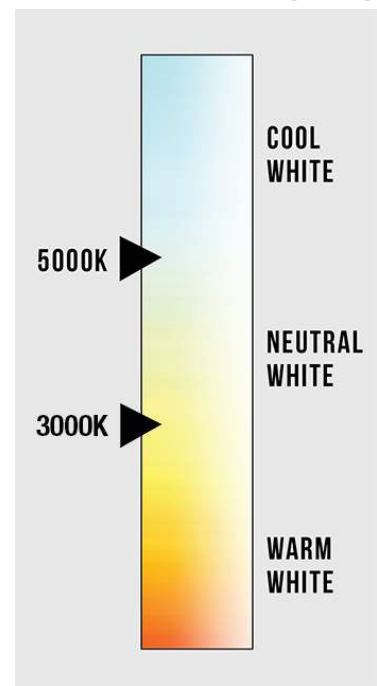


(866) 786-1117 • [www.BeyondLEDTechnology.com](http://www.BeyondLEDTechnology.com)

Due to continuous product improvement, information in this document is subject to change.


# LED Down Light

## JET Series

### Dimensions

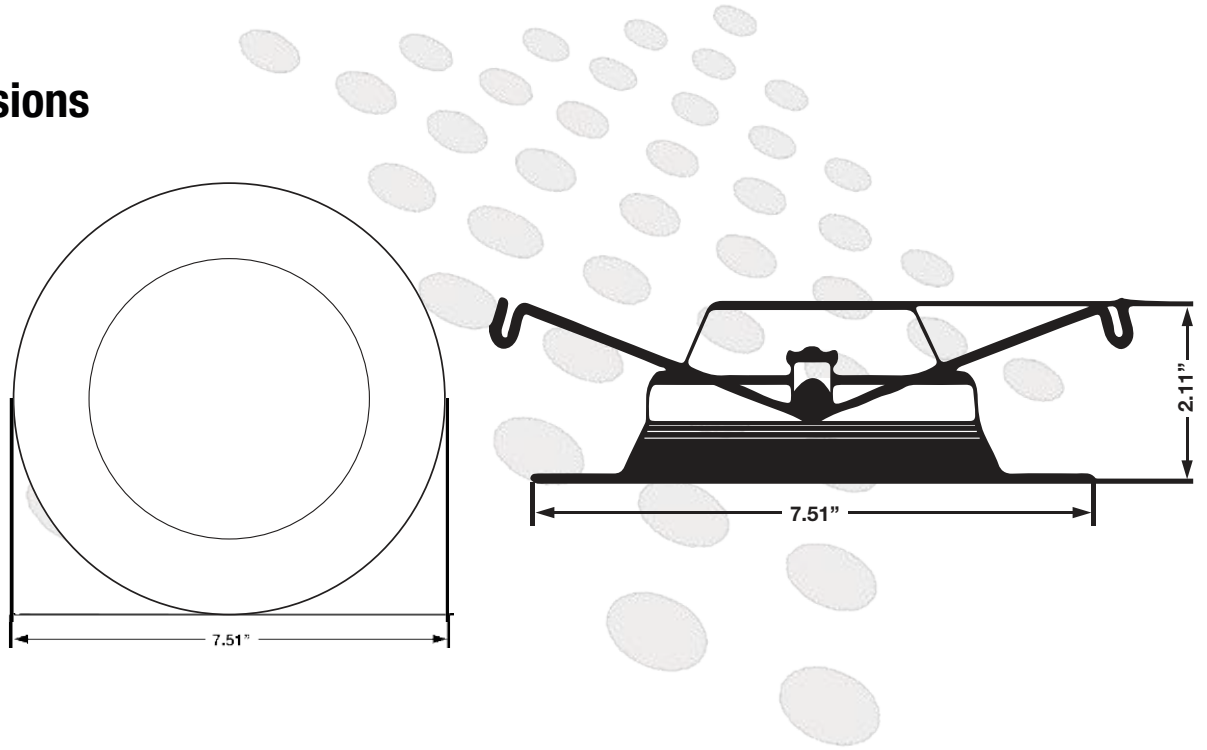


BOX TYPE	SIZE	QTY / CARTON	WEIGHT / CARTON
Inner Box	8" x 7.75" x 2.75"	1	0.5 lbs
Outer Box	17" x 16.75" x 8.5"	12	8 lbs

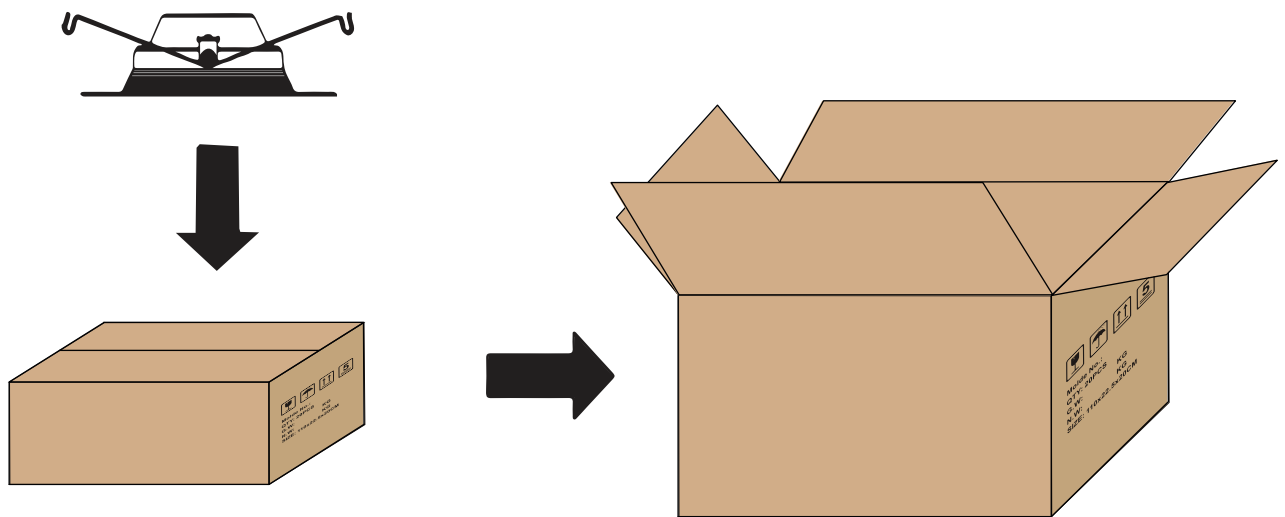

# LED Down Light

## JET Series

**AVERAGE BEAM ANGLE(50%): 92.8°**

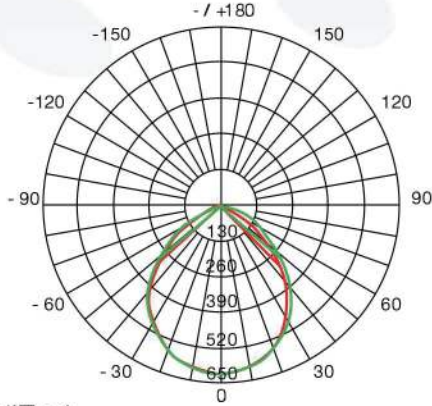

UNIT:cd

- C0/180, 90.9
- C30/270, 95.6

Height	Average Lux (lx)	Light Range (dia.)
39.37in	278.4	78.72in
78.74in	69.59	157.43in
118.11in	20.92	236.15in
157.48in	17.40	314.87in
196.85in	11.12	393.58in
236.22in	7.732	472.30in
275.59in	5.681	551.02in
314.96in	4.249	629.77
354.33in	2.426	708.45in
393.70in	2.784	787.17in

