


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/28/11	D.N.

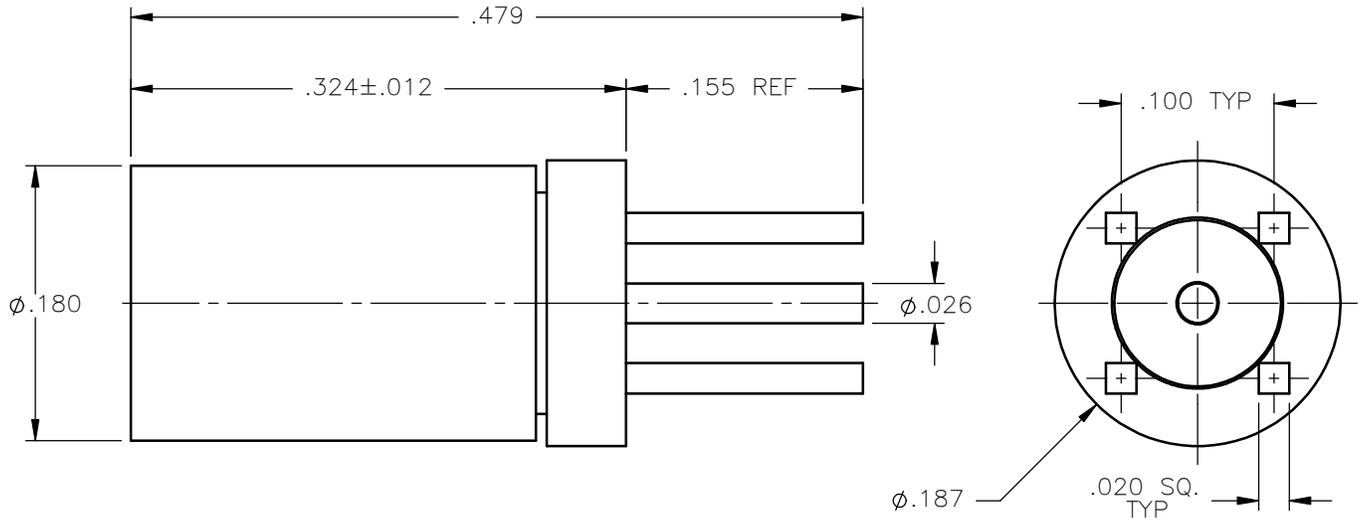

NOTES:

MATERIALS:

1. BODY & CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. SLEEVE = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. BODY & SLEEVE = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER $.00010$ TO $.00020$ COPPER STRIKE PER MIL-C-14550.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER $.00010$ TO $.00020$ STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior a RADIALL company written permission of RADIALL.			
	D.N.	11/28/11				
DECIMAL	ANGLE	CHKD:	DATE	SSLB STRAIGHT FEMALE PLUG P.C.B. MOUNT RECEPTACLE		
		J.S.	11/28/11			
		APVD:	DATE			
		J.M.	11/28/11			
REFERENCE:	MATERIALS & FINISHES:		SIZE	FSCM NO.	DWG. NO.	REV
ORIGINATED: D.N. DATE: 11/28/11	SEE NOTES		A	19505	7325-1512-000	A
			SCALE	8:1	THIRD ANGLE PROJECTION	SHEET 1 OF 1

7325-1512-000