

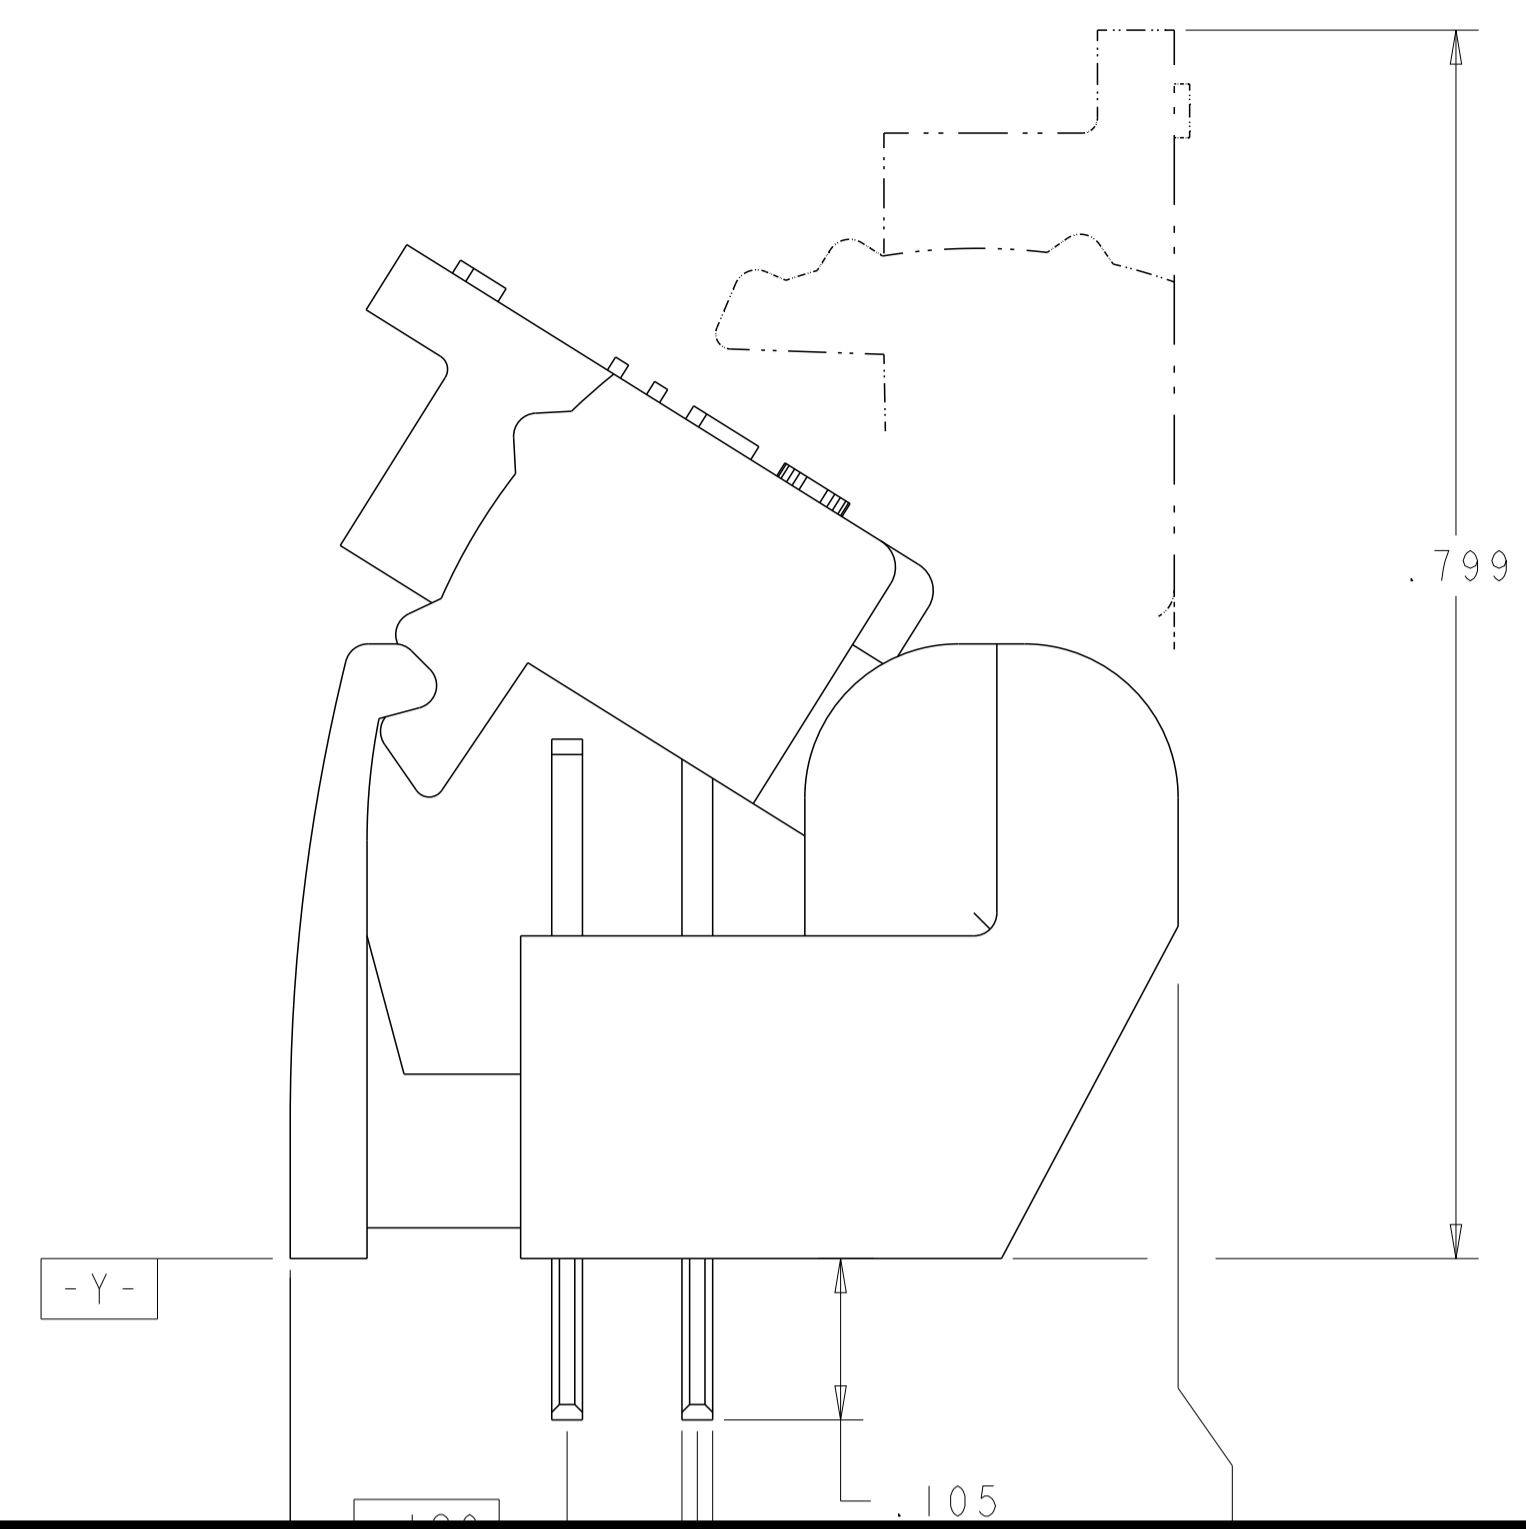
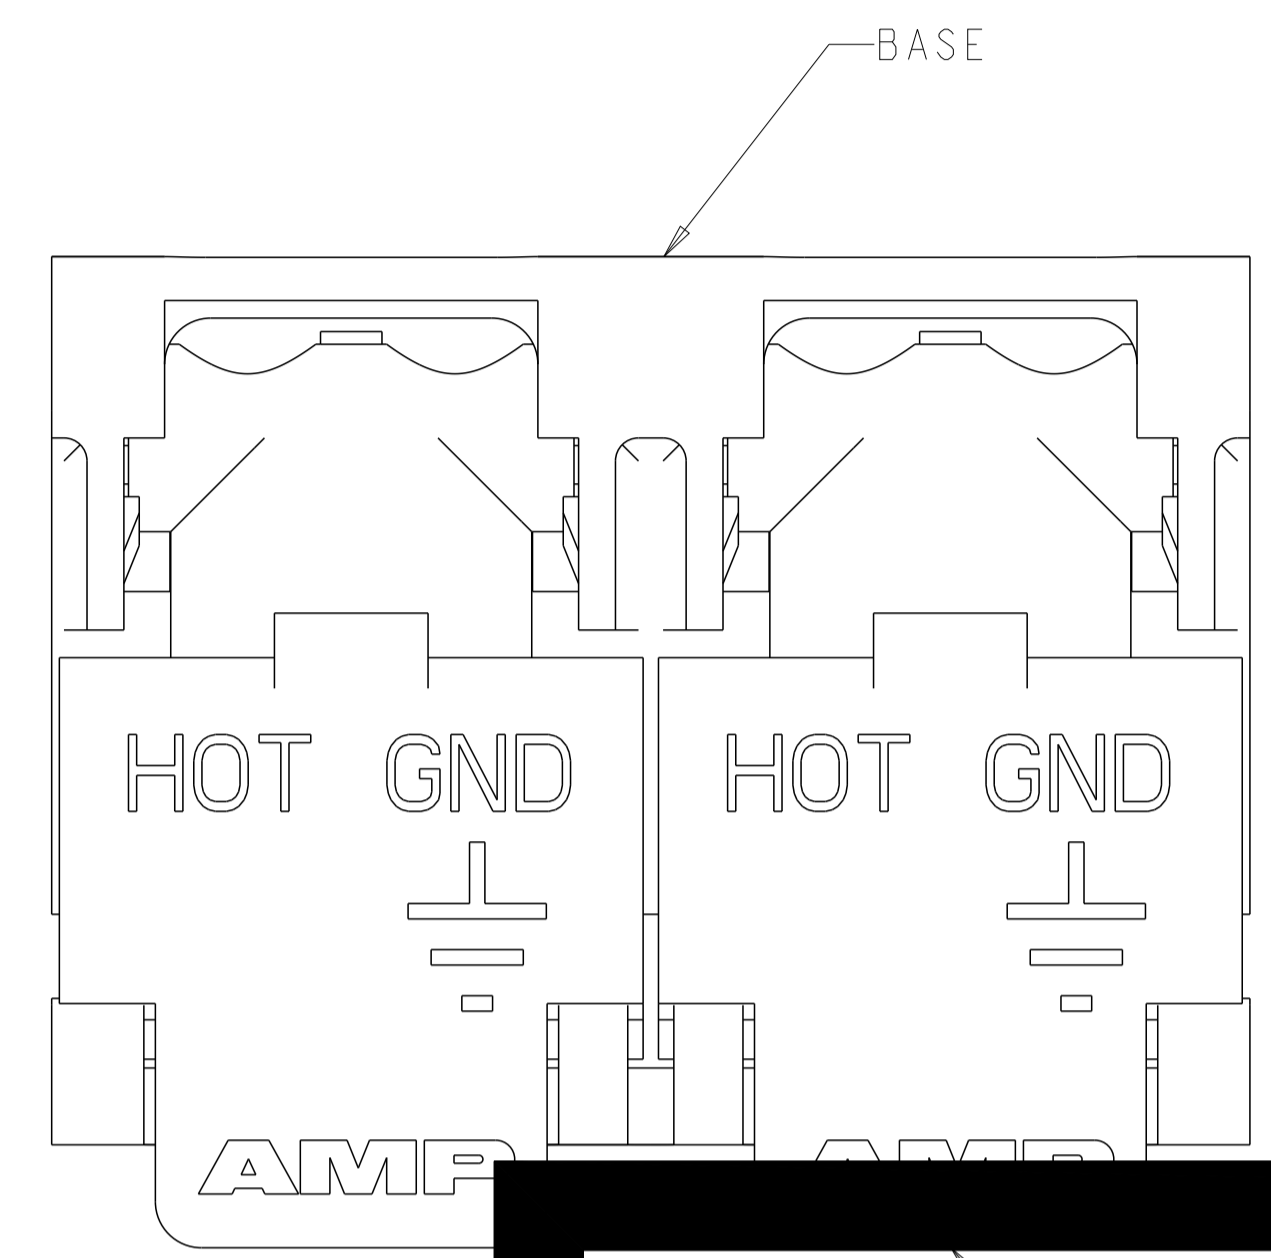
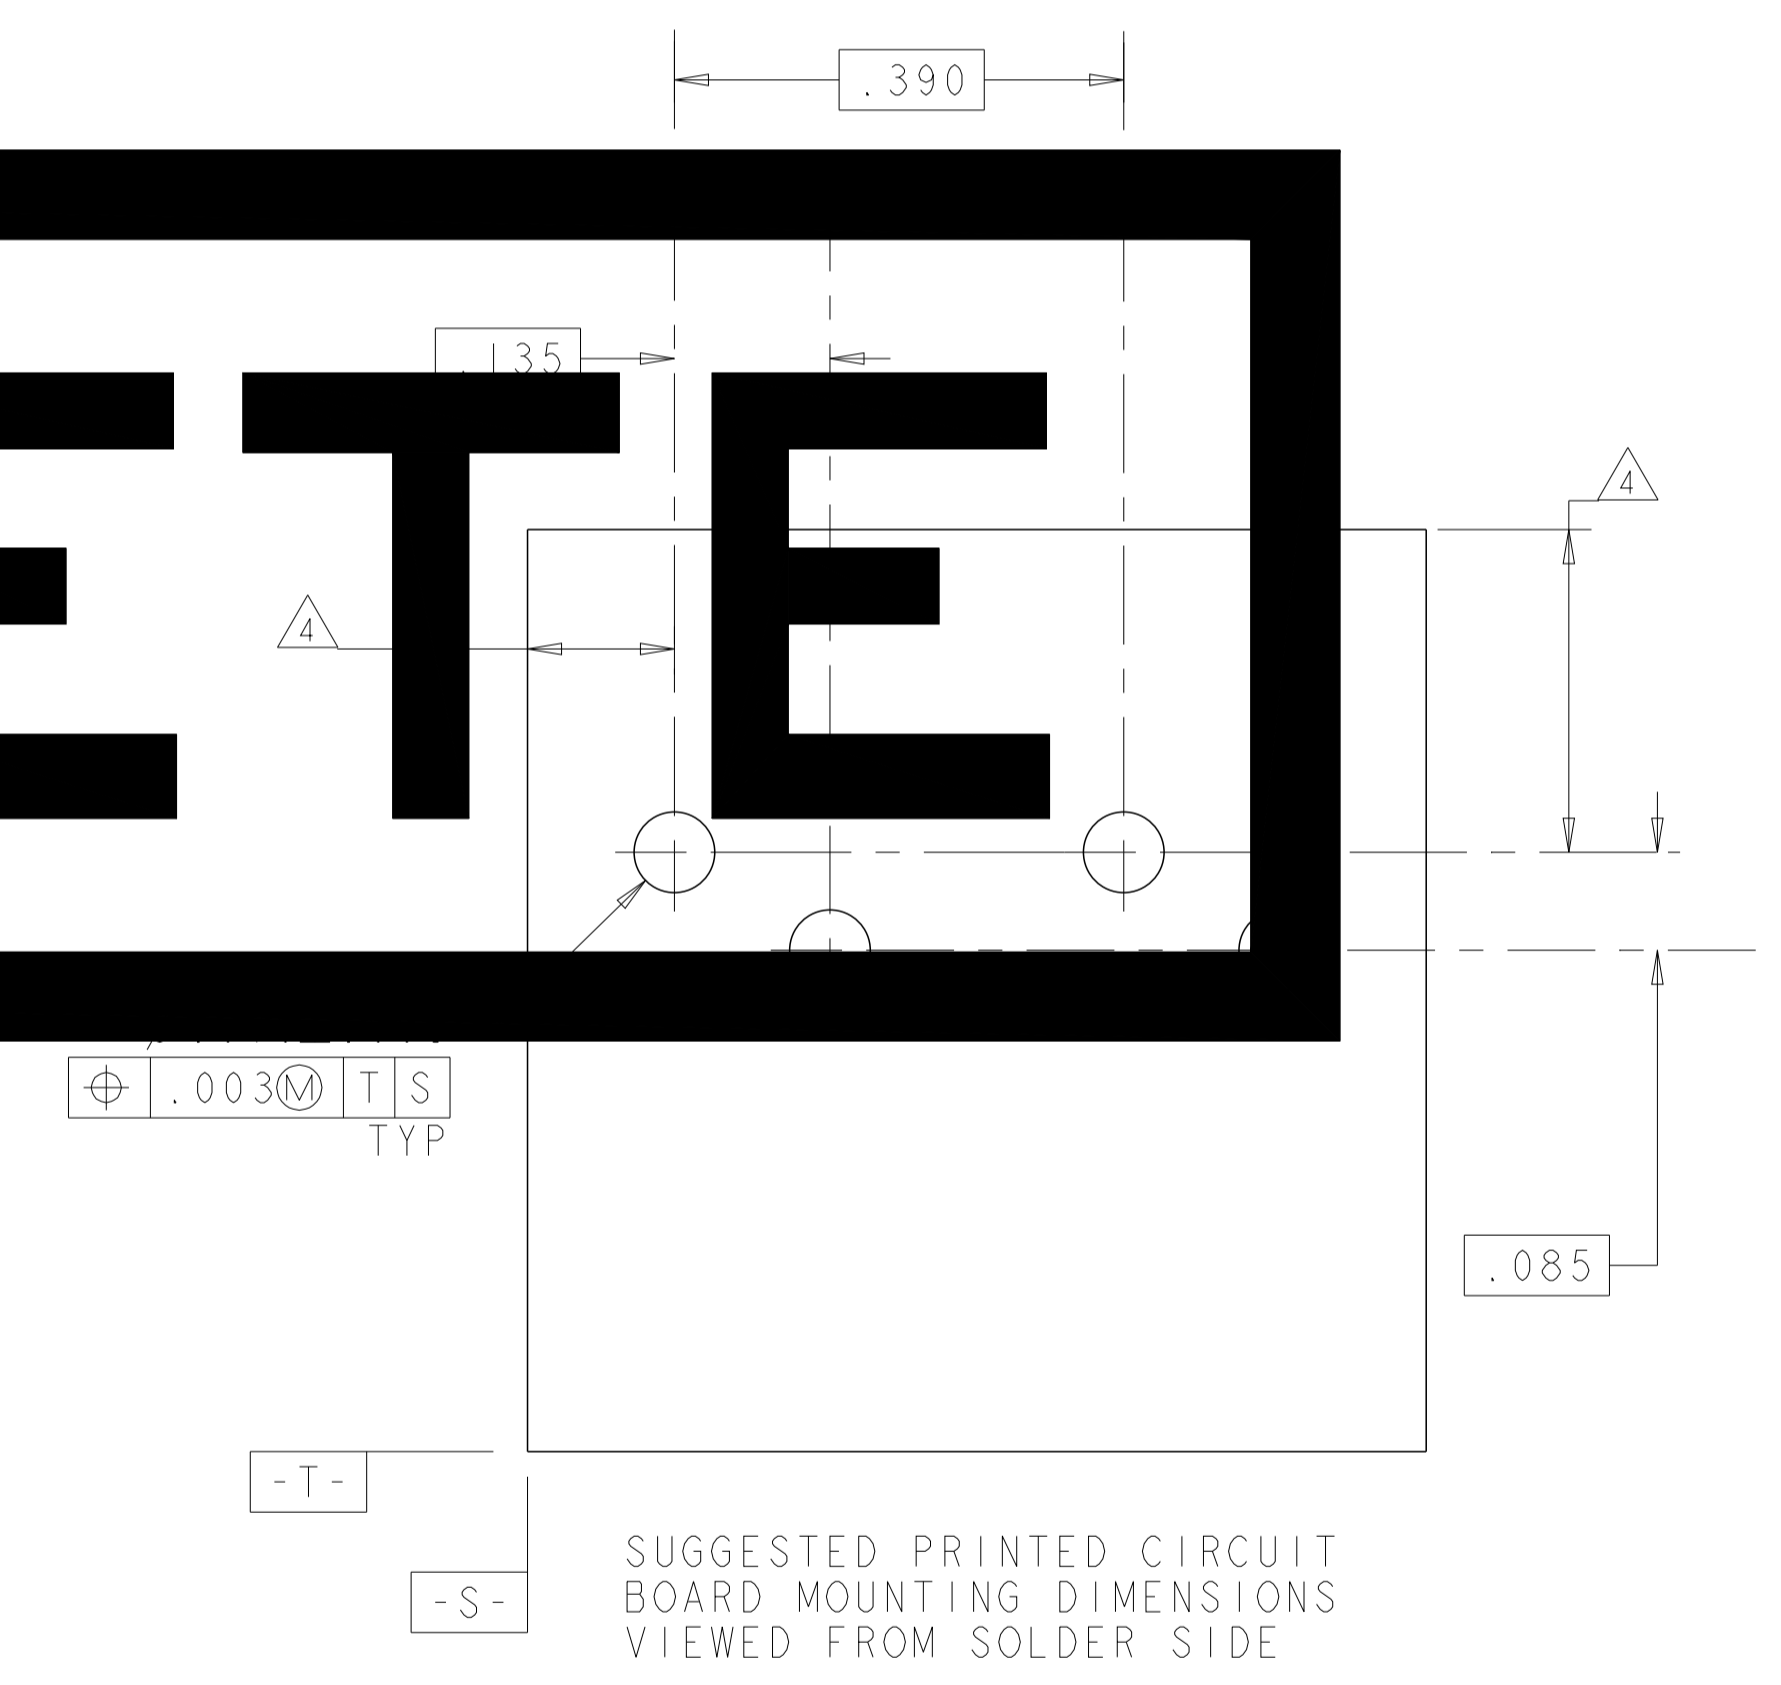


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
D1		REVISED ECR-19-019743	02JUN2020	J. J. W. H.

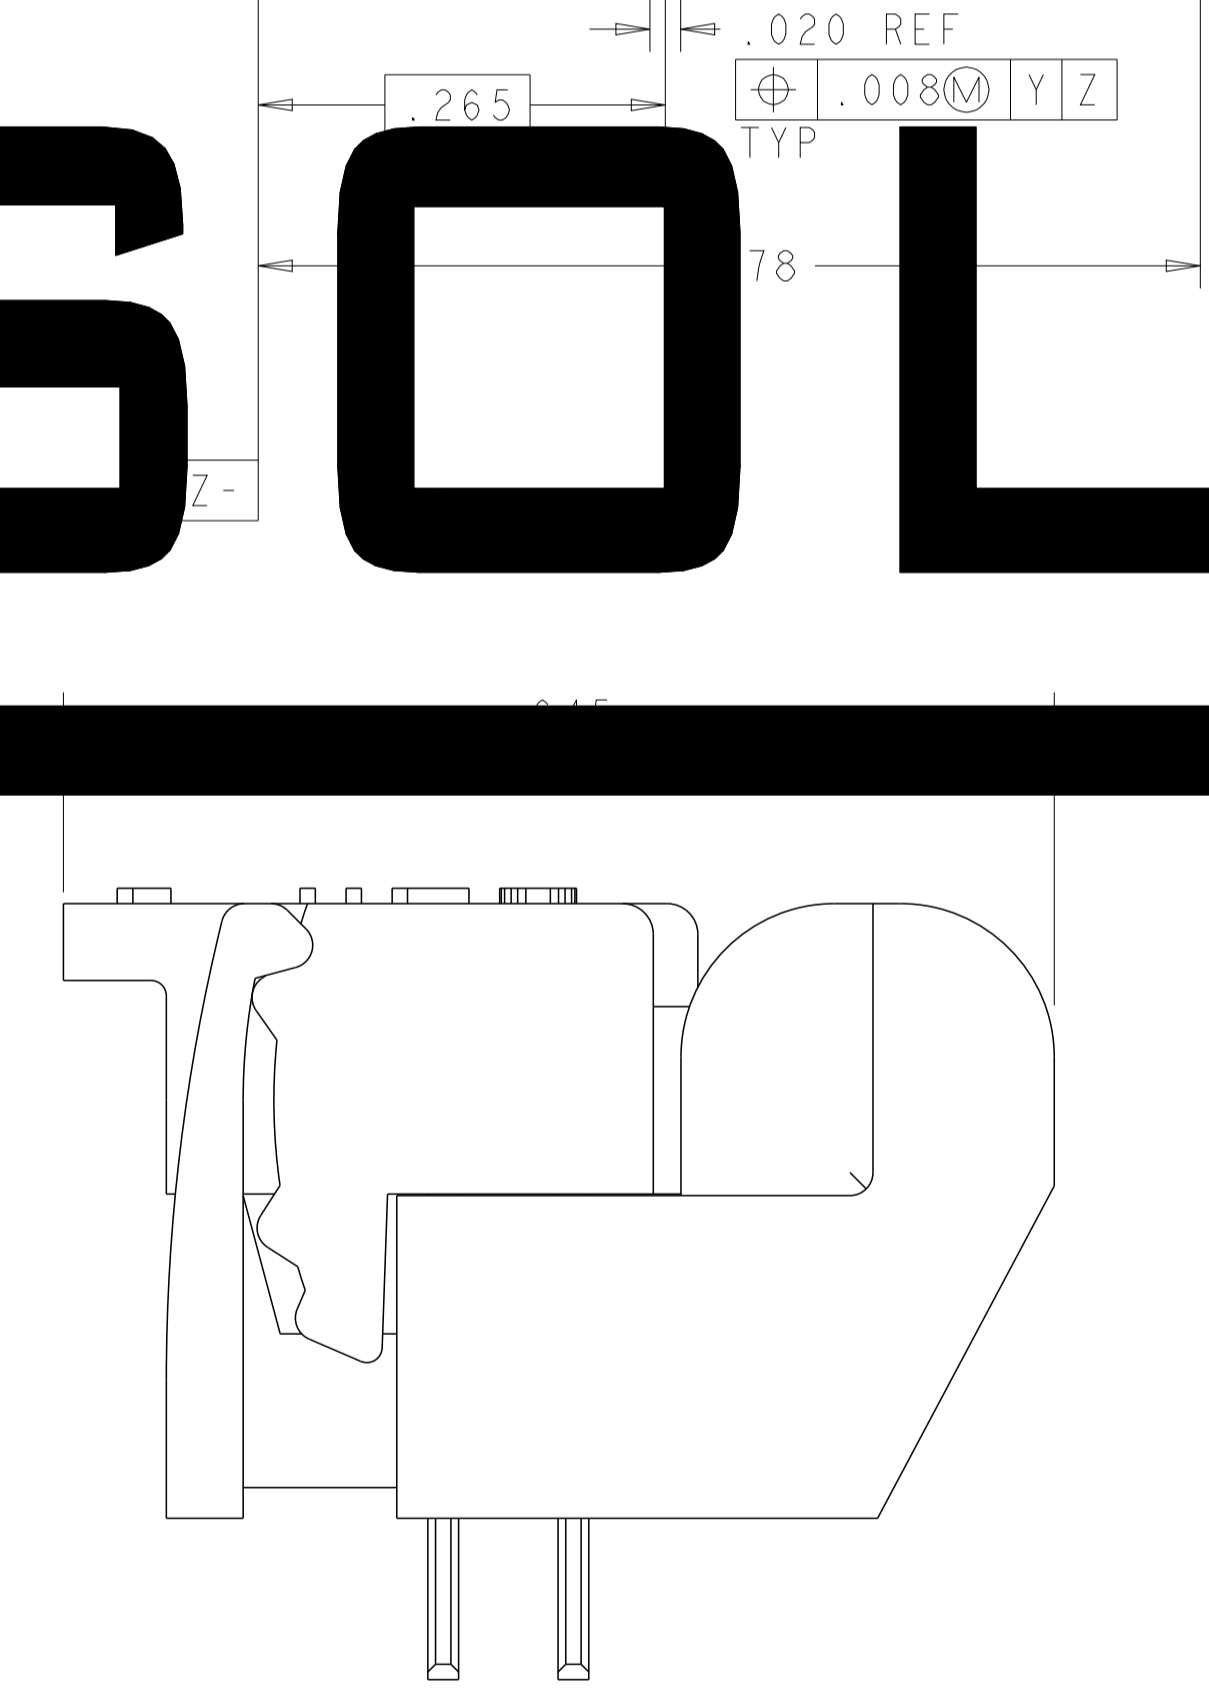

- ⚠ MATERIAL: BASE - POLYESTER MOLDING COMPOUND, BLACK.  
WIRE STUFFER: - POLYESTER MOLDING COMPOUND, BLACK.  
TERMINAL - COPPER ALLOY, PLATED WITH 3.81µm MINIMUM THICK TIN OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
- ⚠ EACH WIRE ENTRY HOLE ACCEPTS ONE UNSTRIPPED SOLID COPPER 22-26 AWG WIRE WITH WIRE INSULATION DIAMETER RANGE FROM .060 THROUGH .040. OTHER WIRE SIZES AND TYPES SHALL BE SUBMITTED TO AMP ENGINEERS FOR APPLICATION APPROVAL.
- 3. SOLDER TABS PROVIDED FOR PERMANENT BOARD MOUNTING.
- ⚠ LOCATION OF HOLE PATTERN DETERMINED BASED ON CUSTOMER REQUIREMENTS.

OBSOLETE

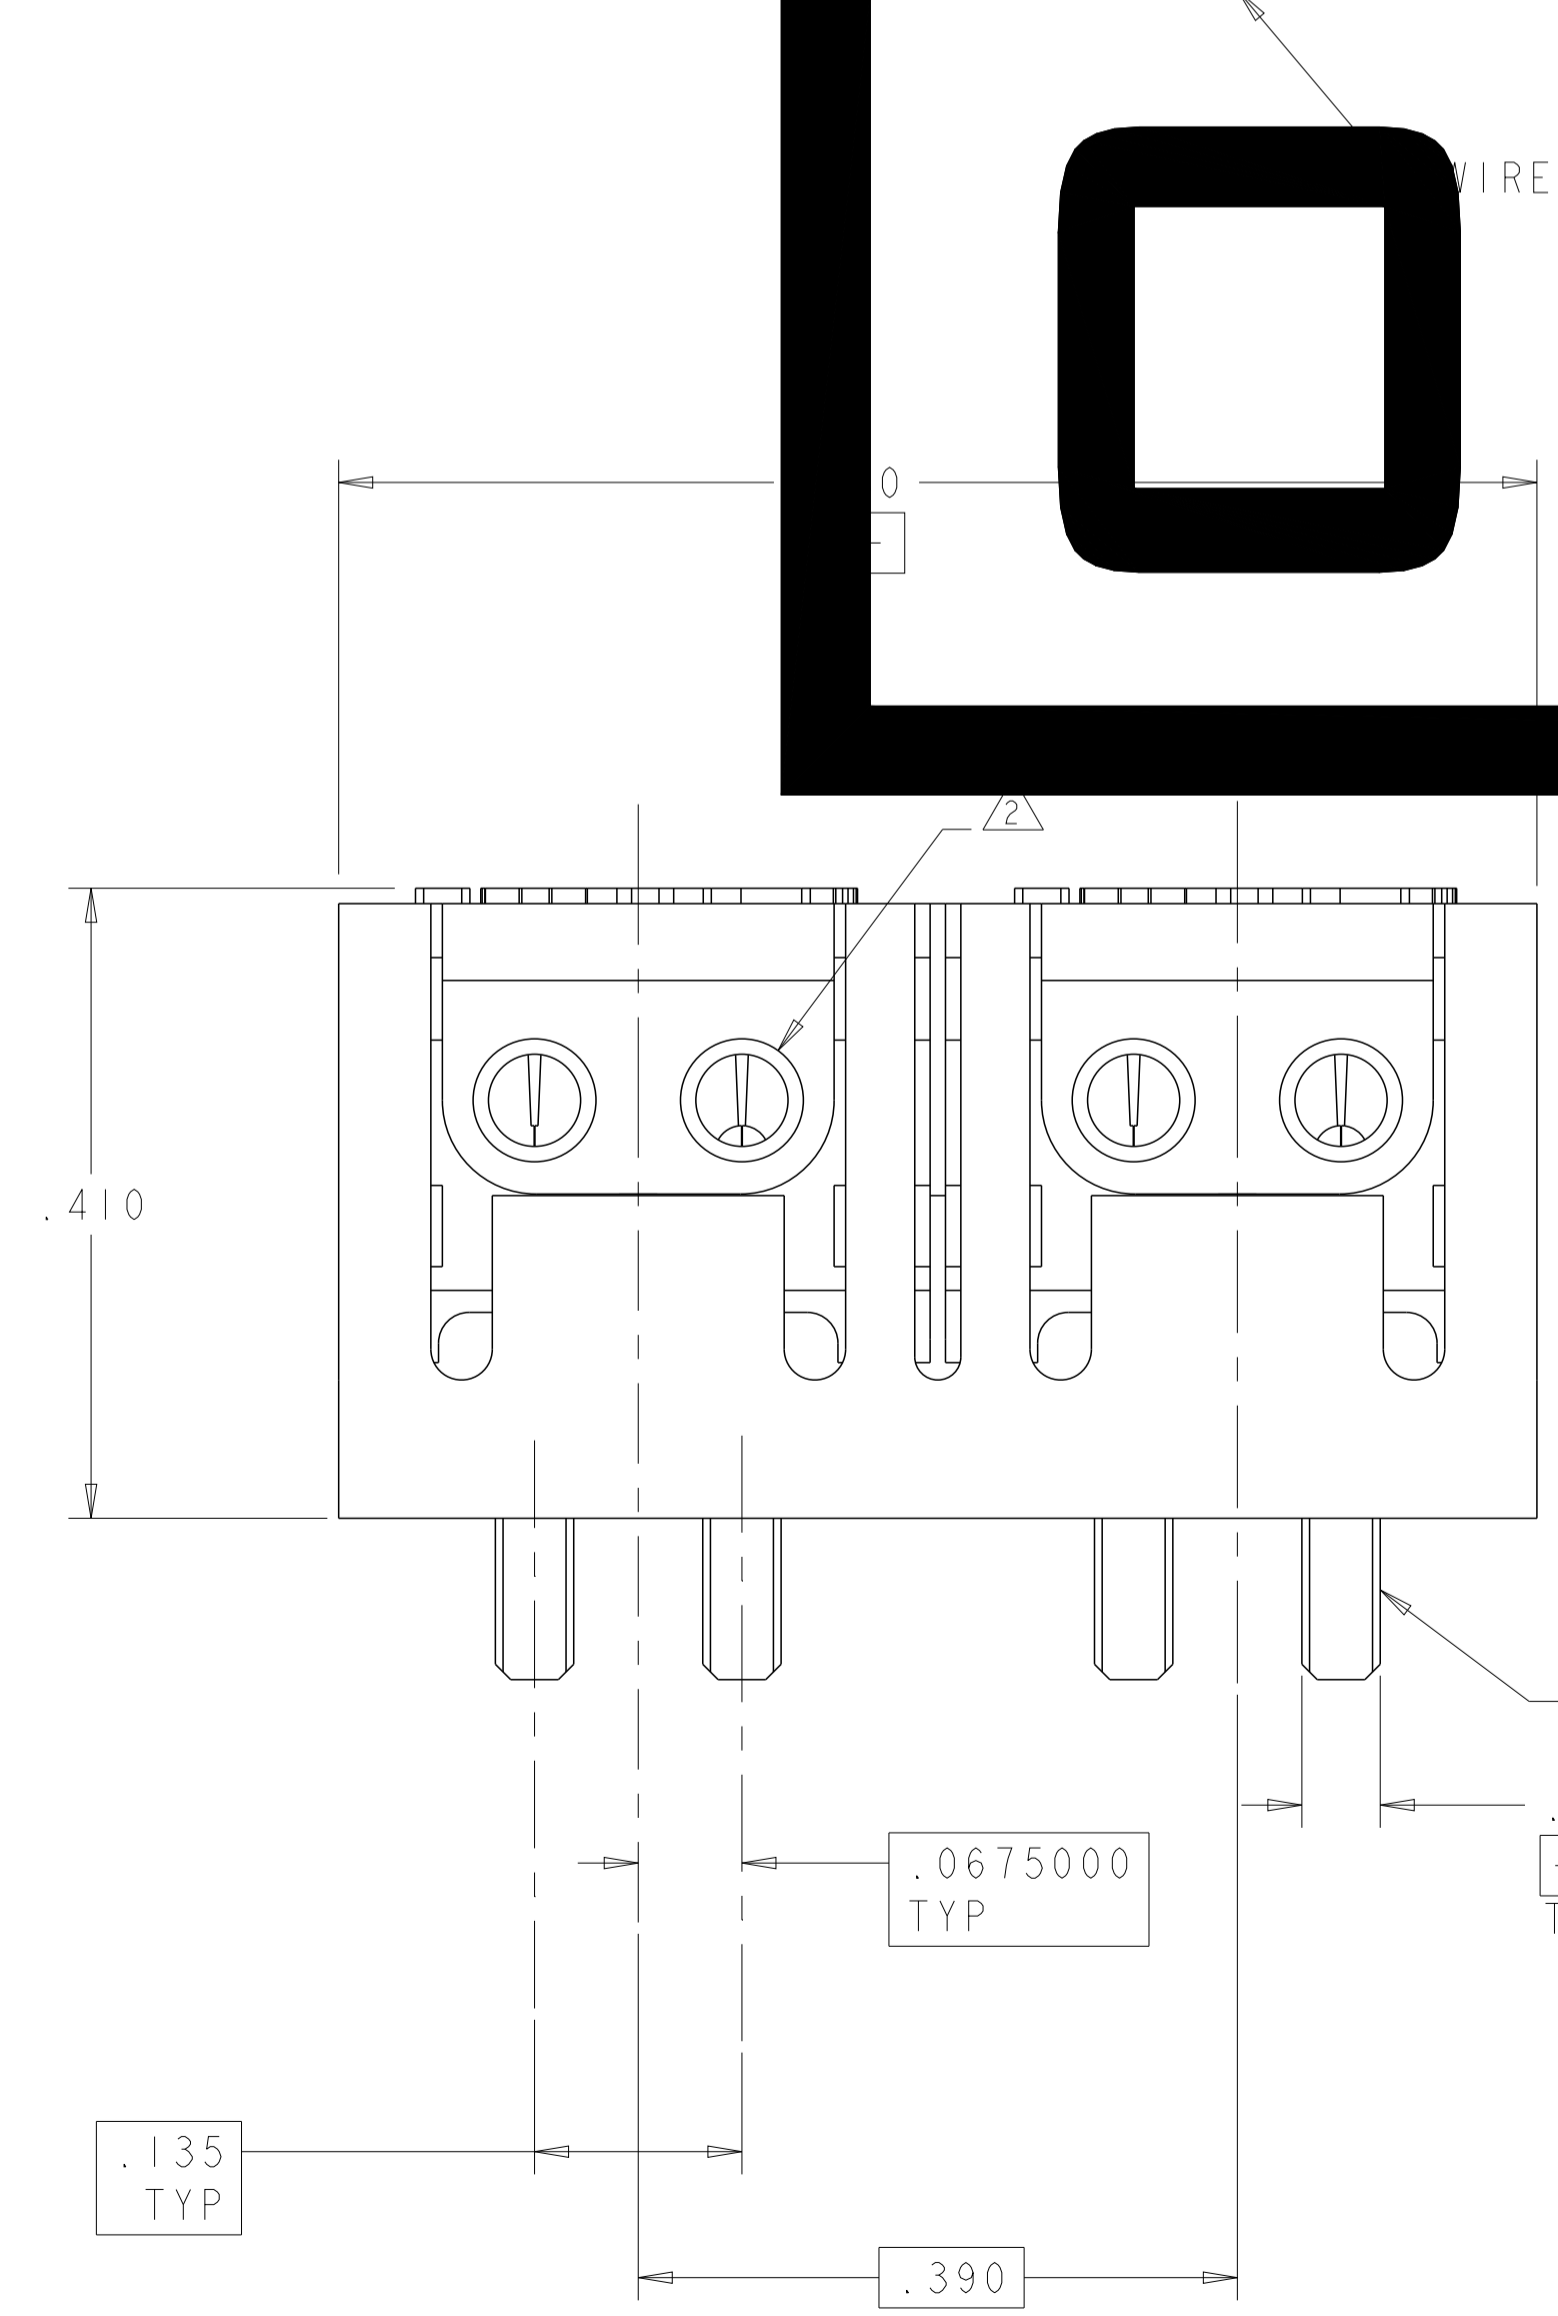

SUGGESTED PRINTED CIRCUIT BOARD MOUNTING DIMENSIONS VIEWED FROM SOLDER SIDE

1339313-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. ZARBOCK 28APR00	NAME ASSEMBLY, DOUBLE PAIR, DOUBLE ENTRY, PIVOT II CONNECTOR
DIMENSIONS: INCHES		CHK M. DERSTINE 28APR00	PRODUCT SPEC
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. DERSTINE 28APR00	APPLICATION SPEC
0 PLC	±	SIZE	RESTRICTED TO
1 PLC	±.01	CAGE CODE	00779
2 PLC	±.005	DRAWING NO	1339313
3 PLC	±.005	SCALE	8:1
4 PLC	±	SHEET	1 OF 1
ANGLES	±2°	REV	D1
MATERIAL		WEIGHT	CUSTOMER DRAWING
FINISH		SCALE 8:1 SHEET 1 OF 1 REV D1	