



- Electrical test:**
- 1.100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5 Mohm(min)
 4. Dielectric test: DC 300V/10ms

PIN ASSIGNMENT:

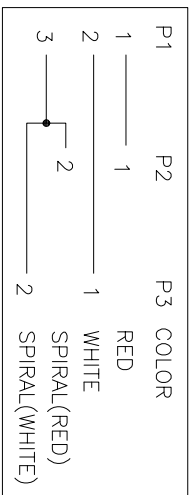

NO.	TIE	QTY	NAME	SPECIFICATION
①	TIE	1	BLACK L=80mm	
⑩	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK/MADE IN CHINA "10PCS"	
⑨	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK/MADE IN CHINA"	
⑧	TUBE	1	HEAT SHRINK TUBE BLACK OD1.5*1.10mm.	
⑦	S/R	1.5g	BLACK PVC 40P (Mould NO.:SR-048)	
⑥	OUT JACKET	3.3g	PVC-40P RED(RD-35).(Mould NO. WM-442)	
⑤	OUT JACKET	3.3g	PVC-40P WHITE(W-100)(Mould NO. WM-442)	
④	OUT JACKET	3.0g	BLACK PVC-40P (Mould NO.: WM-420)	
③	CABLE	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm L=2000±10MM	
②	CONN	2	RCA PLUG FEMALE N-PLATED INSULATOR COLOR: BROWN	
①	CONN	1	3.5ST MALE N-PLATED Tray: 6.0mm L=26mm MOLD TYPE N-PLATED INSULATOR COLOR: BLACK	

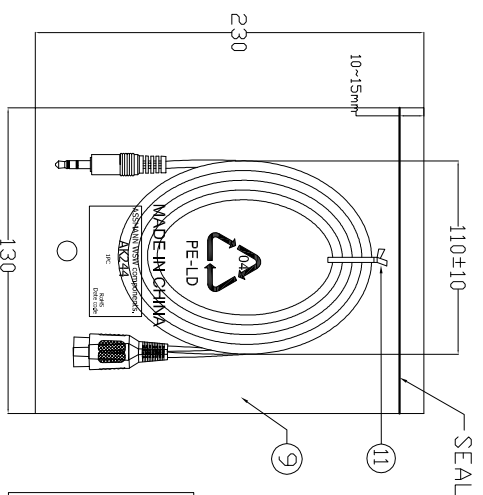

ROHS compliant
Unit: mm

Scale	Free	Date	Name	Customer-No.
TOLERANCE		Drawn	20.02.2017	Amy
		Approved	20.02.2017	Amy
DIM	TOL			
Angle	TOL			
		① Drawn	20.02.2017	Amy
		Modification		
		Date		
		Name		

ASSMANN
wsw components

ASS 7889 CA

AK244

Drawing-No.

ASSMANN WSW-No.

Customer-No.

Replace

rev00

Sheet

1

2

3

4

5

6

7

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H