


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

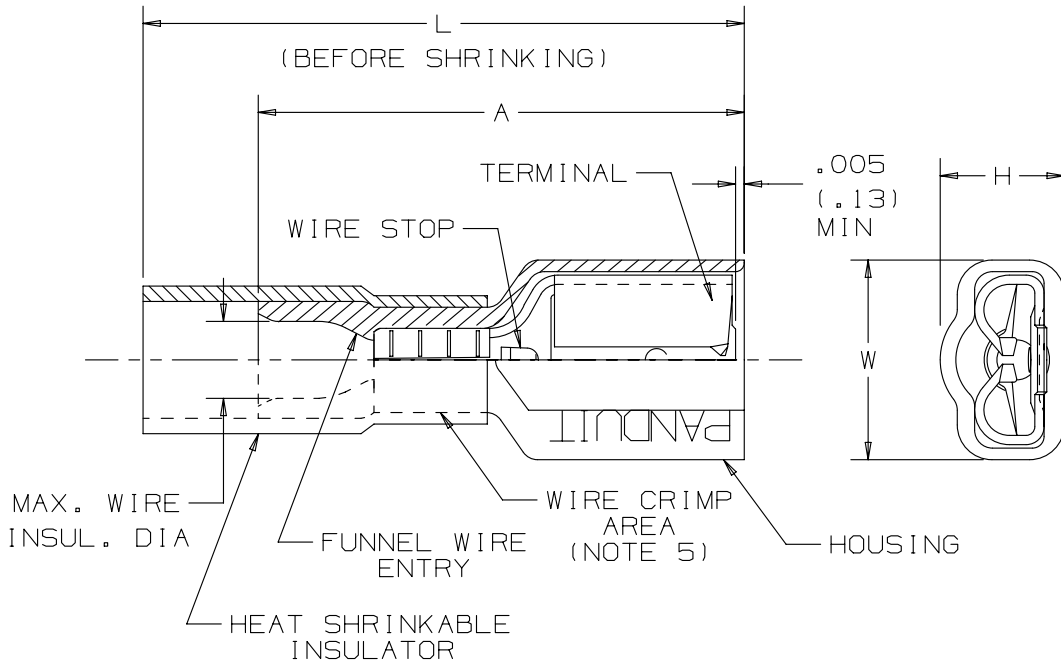

NOTES:

- FOR USE WITH STRANDED COPPER WIRE ONLY (SEE TABLE FOR WIRE RANGE)
- MATERIAL:
  - A. TERMINAL - CDA 260 BRASS, TIN PLATED
  - B. HOUSING - TYPE 66 NYLON
  - C. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
- MINIMUM SHRINK TEMPERATURE: 250°F (120°C)
- ALL DIMENSIONS SHOWN ARE NOMINAL. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
- PART NUMBER DNH10-250FI IS CONSTRUCTED WITH A BRASS SLEEVE IN WIRE CRIMP AREA.
- INSTALLATION TOOL: CT-310
- PKG. QTY. : STD. PKG. -Q=25  
-E=20  
BULK PKG. -D=500  
-T=200
- Maximum continuous operating temperature 230°F (110°C)
- Minimum continuous operating temperature -65°F (-55°C)

PART NUMBER	TAB SIZE	WIRE RANGE AWG	HOUSING COLOR	MAX. INSUL. DIA	DIMENSIONS				STRIP LENGTH	
					A	W	H	L		
DNH18-250FI B	-Q -D	.250 X .032 (6.3 X 0.8)	22-18	RED	.132 (3.35)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH14-250FI B	-Q -D	.250 X .032 (6.3 X 0.8)	16-14	BLUE	.156 (3.96)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH10-250FI	-E -T	.250 X .032 (6.3 X 0.8)	12-10	YELLOW	.230 (5.84)	.96 (24.4)	.35 (8.9)	.27 (6.9)	1.44 (36.6)	3/8 (9.5)

TITLE		<b>HEAT SHRINK FULLY INSULATED FEMALE DISCONNECTS</b>				
		CUSTOMER DRAWING				
ITEM REVISION NAME		N41458BA/07				
DATASET FILE NAME		N41458BA_DC/07A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		<b>PANDUIT</b>				
.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °						
		SEE NOTES				
		DRAWING NUMBER: A41458				
07   04-25-13   JBN   RTFI   RTFI   UPDATED DRAWING BORDER & TITLE BLOCK   A41458		THIRD ANGLE PROJECTION				
REV	DATE	BY	CHK	SCALE	SHT 1 OF 1	SIZE
				NONE		A

D10100DA/15