



### Electrical specifications

**Center Frequency:** 1000 MHz  
**Bandwidth:** 20 MHz typ  
**VSWR:** 1.5 : 1 max  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 990-1010 MHz  
**Passband Insertion Loss:** 3.2 dB max  
**Rejection:** 65 dBc min 800 MHz  
**Rejection 2:** 65 dBc min 1200 MHz  
**Power Handling:** 20 dBm

### Mechanical


**Mounting Method:** SMT  
**Dimensions:** 13mm x 12mm x 5.5

### Environmental

**Operating Temperature:** -40°C to 85°C  
**Storage Temperature:** -50°C to +90°C

This product is RoHs compliant.

### Outline Drawing:

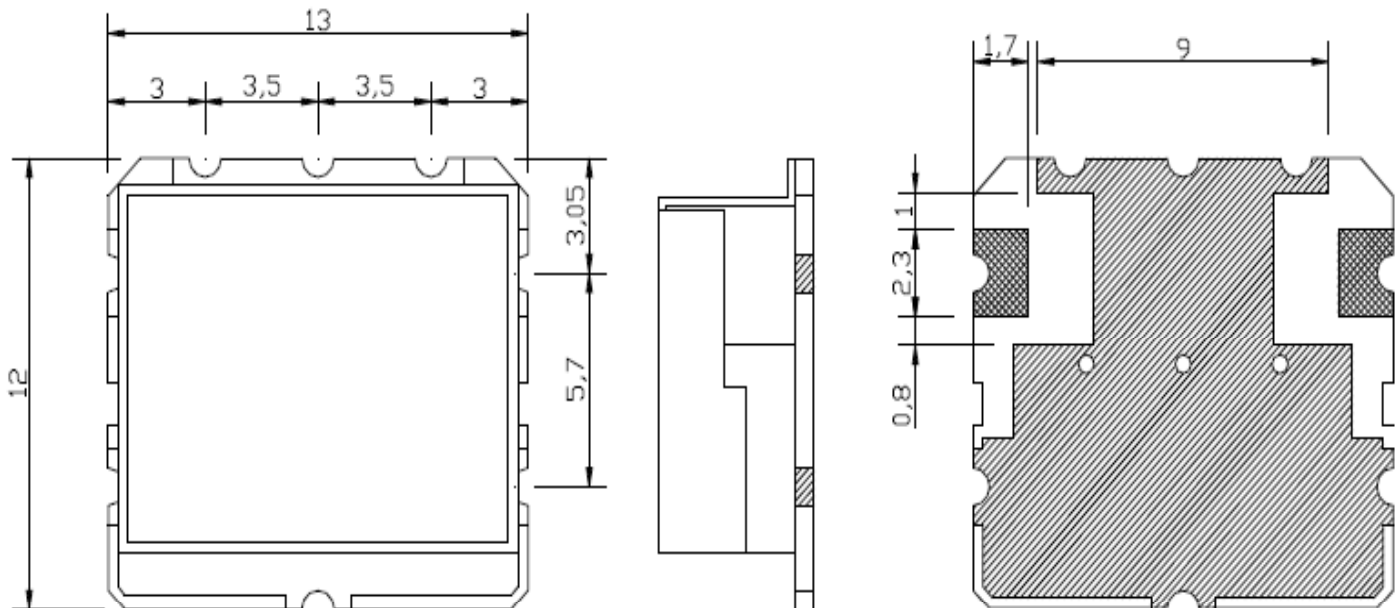



### Response Plot:

