


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	F4	REVISED PER ECN-22-150900	28APR2022	RK CSD

**AMP**  
WIRE RANGE

---

2/0 AWG  
STRANDED

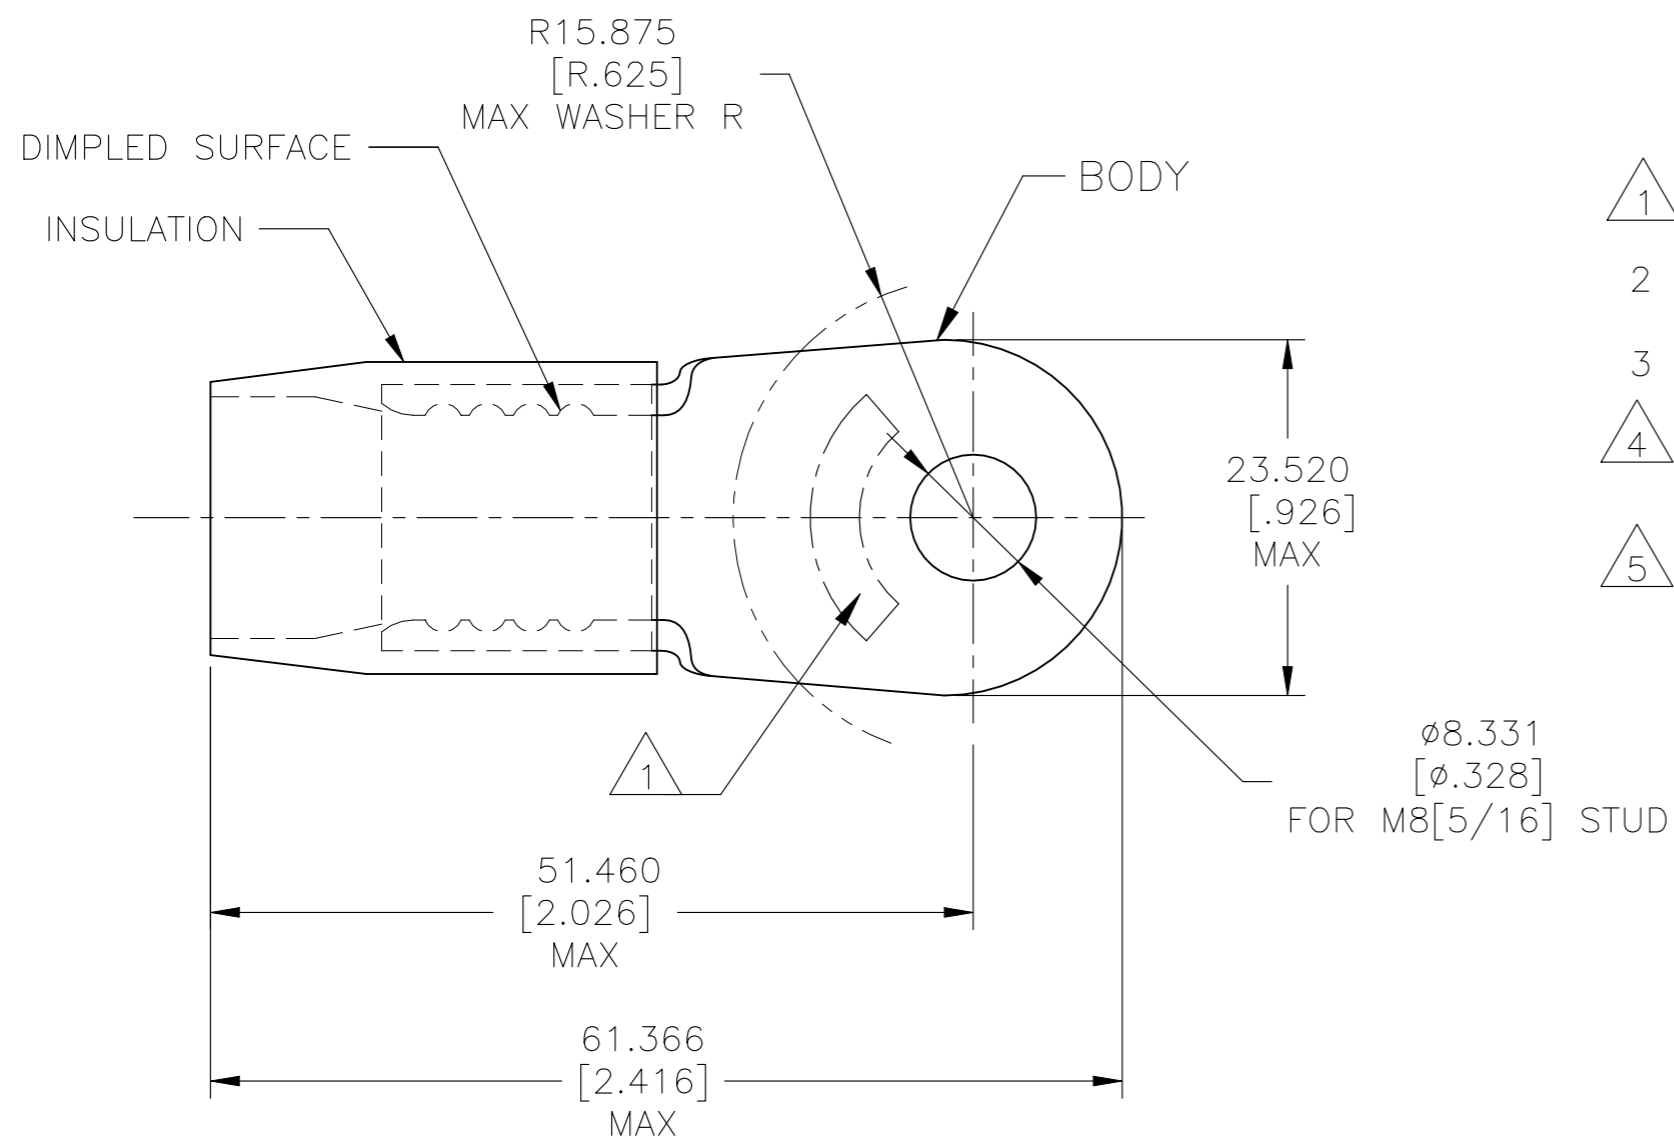

- △ 1 STAMP AMP 2/0 W\*, LOCATE APPROX AS SHOWN.
- 2 BODY MATERIAL THK 2.032±0.051 [.080±.002]
- 3 WIRE INSULATION ø15.494 [ø.610] MAX.
- △ 4 BODY: COPPER PER ASTM B-152  
INSULATION: NYLON ASTM D4066 TYPE I.
- △ 5 BODY: TIN PLATED PER ASTM B-545  
INSULATION: COLOR-YELLOW.

25	LOOSE PC	324083
QTY	PACKAGE TYPE	PART NO

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.S. GOULDEN 9-28-93	TE Connectivity	
	VOLTAGE RATING: -	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK R. HERSEY 9-28-93
CIRCULAR MIL AREA: 60.6-76.3mm <sup>2</sup> [119,500-150,500] STRANDED		0 PLC ± -	APVD M ELLIS 9-28-93		NAME TERMINAL, RING TONGUE, TERMINYL, WIRE SIZE: 2/0 AWG
		1 PLC ± -	PRODUCT SPEC		
		2 PLC ± -	APPLICATION SPEC	SIZE	
		3 PLC ± 0.127[.005]	WEIGHT	CAGE CODE	
		4 PLC ± -	CUSTOMER DRAWING	DRAWING NO	
		ANGLES ± -	SCALE NTS	SHEET 1 OF 1	
		FINISH	RESTRICTED TO	REV F4	
		△ 4			
		△ 5			