



SAW Components

SAW Duplexer

W-CDMA Band 1

Series/type:	B8510
Ordering code:	B39212B8510P810
Date:	September 09, 2013
Version:	2.0


© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


Data sheet


Application


- Low-loss SAW duplexer for mobile telephone W-CDMA Band 1 (UMTS) systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 60 MHz
- High isolation between Tx and Rx


Features

- Package size 2.0 x 1.6 mm²
- max. Package height 0.47mm
- RoHS compatible
- Approximate weight 0.005 g
- Package for **Surface Mount Technology (SMT)**
- Ni terminals, Au-plated
- **Electrostatic Sensitive Device (ESD)**
- Fully matched by integrated matching network
- **Moisture Sensitive Level 3**

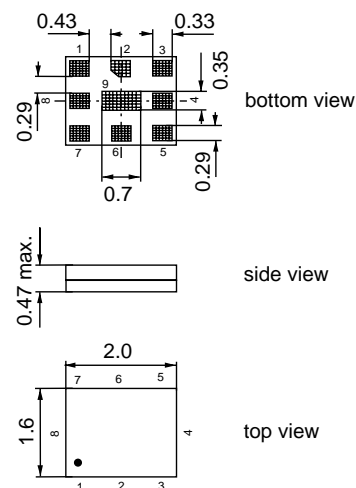
Pin configuration

- 3 Tx input
- 6 Antenna
- 1 Rx output
- 2, 4, 5, 7, 8, 9 To be grounded

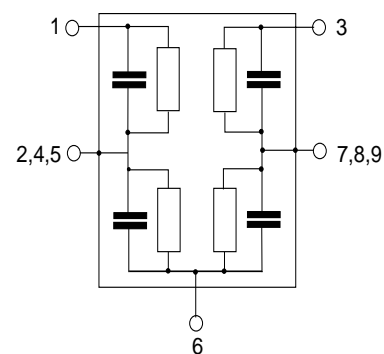

Data sheet

Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 2.9nH
RX terminating impedance:	Z _{Rx} = 50 Ω 11.8nH

Characteristics Tx-Antenna		B8510		
		min.	typ. @ 25 °C	max.
Center frequency	f _c		1950.0	MHz
Maximum insertion attenuation				
@f _{Carrier} 1922.4 ... 1977.6 MHz	α _{W-CDMA} ¹⁾	—	1.2	1.7 dB
1920.0 ... 1980.0 MHz	α _{CW}	—	1.4	1.8 dB
Amplitude ripple (p-p)				
1920.0 ... 1980.0 MHz	Δα	—	0.5	0.9 dB
1920.0 ... 1980.0 MHz	Δα _{5MHz}	—	0.3	0.5 dB
Error Vector Magnitude				
@f _{Carrier} 1922.4 ... 1977.6 MHz	EVM ²⁾	—	1.1	2.0 %
TX port VSWR				
1920.0 ... 1980.0 MHz		—	1.7	2.0
ANT port VSWR				
1920.0 ... 1980.0 MHz		—	1.6	1.9
Attenuation	α			
10.0 ... 1574.0 MHz		30	40	— dB
420.0 ... 494.0 MHz		44	51	— dB
843.0 ... 894.0 MHz		38	43	— dB
1559.0 ... 1563.0 MHz		39	44	— dB
1565.42 ... 1573.374 MHz		39	44	— dB
1573.374... 1577.466 MHz		40	45	— dB
1577.466... 1585.42 MHz		40	45	— dB
1597.5515... 1605.886 MHz		41	46	— dB
1605.886... 1805.0 MHz		25	36	— dB
1805.0 ... 1865.0 MHz		25	33	— dB
1865.0 ... 1880.0 MHz		15	28	— dB
2110.0 ... 2170.0 MHz	α _{CW}	42	46	— dB
@f _{Carrier} 2112.4 ... 2167.6 MHz	α _{W-CDMA} ¹⁾	42	46	— dB
2400.0 ... 2500.0 MHz		30	35	— dB
2620.0 ... 2690.0 MHz		25	32	— dB
3830.0 ... 3970.0 MHz		20	32	— dB



Characteristics Tx-Antenna	B8510			
	min.	typ. @ 25 °C	max.	
Attenuation (cont.)				
				α
4900.0 ... 5150.0 MHz	15	29	—	dB
5150.0 ... 5950.0 MHz	8	12	—	dB
7670.0 ... 7930.0 MHz	—	9	—	dB
9590.0 ... 9910.0 MHz	—	10	—	dB
11510.0 ... 11890.0 MHz	—	14	—	dB

1) Attenuation of W-CDMA signal (Power Transfer Function). Please, refer to page 8 of this document.

2) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141

Data sheet

Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 2.9nH
RX terminating impedance:	Z _{Rx} = 50 Ω 11.8nH

				B8510			
Characteristics Antenna-Rx				min.	typ. @ 25 °C	max.	
Center frequency	f _c				2140.0		MHz
Maximum insertion attenuation							
@f _{Carrier} 2112.4 ... 2167.6	MHz	α _{W-CDMA} ¹⁾	—	1.8	2.3		dB
2110.0 ... 2170.0	MHz	α _{CW}	—	1.9	2.4		dB
Amplitude ripple (p-p)							
2110.0 ... 2170.0	MHz	Δα	—	0.4	0.9		dB
2110.0 ... 2170.0	MHz	Δα _{5MHz}	—	0.3	0.5		dB
Error Vector Magnitude							
@f _{Carrier} 2112.4 ... 2167.6	MHz	EVM ²⁾	—	1.0	2.0		%
ANT port VSWR							
2110.0 ... 2170.0	MHz		—	1.5	1.8		
RX port VSWR							
2110.0 ... 2170.0	MHz		—	1.5	1.8		
Attenuation		α					
10.0 ... 1920.0	MHz		40	50	—		dB
190.0	MHz		50	>80	—		dB
814.0 ... 849.0	MHz		50	62	—		dB
880.0 ... 915.0	MHz		50	61	—		dB
1730.0 ... 1790.0	MHz		40	52	—		dB
1920.0 ... 1980.0	MHz	α _{CW}	50	57	—		dB
@f _{Carrier} 1922.4 ... 1977.6	MHz	α _{W-CDMA} ¹⁾	50	57	—		dB
1980.0 ... 2015.0	MHz		30	52	—		dB
2015.0 ... 2075.0	MHz		10	23	—		dB
2255.0 ... 2400.0	MHz		40	54	—		dB
2400.0 ... 2500.0	MHz		40	52	—		dB
2500.0 ... 6000.0	MHz		30	40	—		dB
4030.0 ... 4150.0	MHz		38	44	—		dB
4220.0 ... 4340.0	MHz		35	41	—		dB
4900.0 ... 5950.0	MHz		30	47	—		dB
5725.0 ... 5875.0	MHz		30	48	—		dB
5950.0 ... 6130.0	MHz		—	48	—		dB
6130.0 ... 6330.0	MHz		—	48	—		dB

Characteristics Antenna-Rx	B8510			
	min.	typ. @ 25 °C	max.	
Attenuation (cont.) α				
6330.0 ... 6510.0 MHz	—	47	—	dB
6510.0 ... 13020.0 MHz	—	29	—	dB
8440.0 ... 8680.0 MHz	—	42	—	dB
10550.0 ... 10850.0 MHz	—	48	—	dB
12660.0 ... 13020.0 MHz	—	29	—	dB
IMD product level limits³⁾				
at $f_{TX}=1950.0$ MHz, $f_{RX}=2140.0$ MHz				
Blocker 1	190.0 MHz	—	129 ⁴⁾	115 dBm
Blocker 2	1760.0 MHz	—	108	95 dBm
Blocker 3	4090.0 MHz	—	116	105 dBm
Blocker 4	6040.0 MHz	—	115	105 dBm

1) Attenuation of W-CDMA signal (Power Transfer Function). Please, refer to page 8 of this document.

2) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141

3) IMD product level limits for power levels $P_{TX}=21.5$ dBm (antenna port output power) and $P_{Blocker}=-15$ dBm (antenna port input power)

4) Value at noise level of test setup

Data sheet


Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 2.9nH
RX terminating impedance:	Z _{Rx} = 50 Ω 11.8nH

				B8510			
Characteristics Tx-Rx				min.	typ. @ 25 °C	max.	
Isolation			α				
	1920.0 ... 1980.0	MHz	α_{CW}	55	59	—	dB
	1922.4 ... 1977.6	MHz	$\alpha_{W-CDMA}^{1)}$	55	59	—	dB
	2110.0 ... 2170.0	MHz	α_{CW}	50	55	—	dB
	2112.4 ... 2167.6	MHz	$\alpha_{W-CDMA}^{1)}$	50	55	—	dB
	1574.0 ... 1577.0	MHz		40	66	—	dB
	3830.0 ... 3970.0	MHz		20	66	—	dB
	5750.0 ... 5950.0	MHz		20	51	—	dB

¹⁾ Attenuation of W-CDMA signal (Power Transfer Function). Please, refer to page 8 of this document.

Data sheet


Annotation for characteristics section

 Attenuation of W-CDMA signal (Power Transfer Function, α_{W-CDMA}) is determined by

$$\int_{-\infty}^{\infty} |S_{ds21}(f)H_{RRC}(f - f_{Carrier})|^2 df$$

with $f_{Carrier}$ according to 3GPP TS 25.101 (e.g. for UMTS pass band, $f_{Carrier}$ ranges from 1922.4 MHz (lowest Tx channel) to 1967.6 MHz (highest Tx channel)). Here, $H_{RRC}(f)$ is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:

$$\int_{-\infty}^{\infty} |H_{RRC}(f)|^2 df = 1$$

Maximum Ratings

Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	5 ¹⁾	V	
ESD voltage	V_{ESD}	50 ²⁾	V	MM - machine model HBM - human body model CDM - field induced charged device model
		200 ³⁾	V	
		500 ⁴⁾	V	
Input power at	P_{in}	29	dBm	} continuous wave
elsewhere	P_{in}	10	dBm	} 50 °C, 5000h

1) 168h Damp Heat Steady State acc. to IEC 60068-2-67 Cy

2) Acc. to JESD22-A115B (MM - Machine Model) , 10 negative & 10 positive pulses.


3) Acc. to JESD22-A114F (HBM - Human Body Model) , 1 negative & 1 positive pulses

4) Acc. to JESD22-C101C (CDM - Field Induced Charged Device Model) , 3 negative & 3 positive pulses


Data sheet



Frequency Response TX-ANT (CW signal)

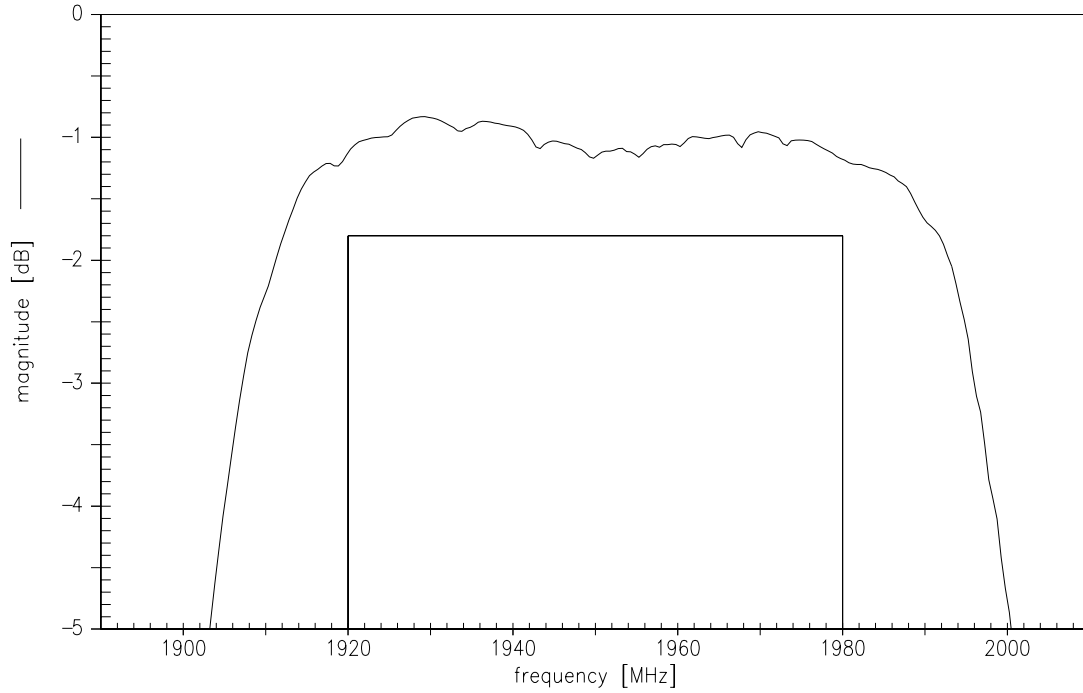


Frequency Response RX-ANT (CW signal)

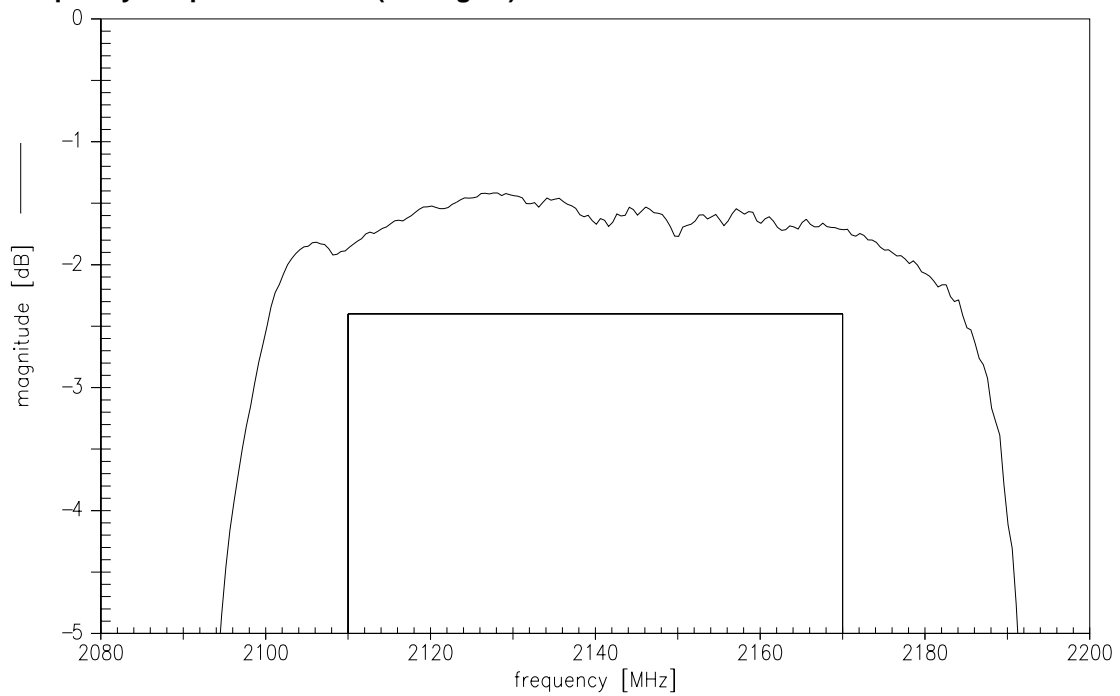


Please read *cautions and warnings* and *important notes* at the end of this document.



Frequency Response TX-ANT (CW signal)

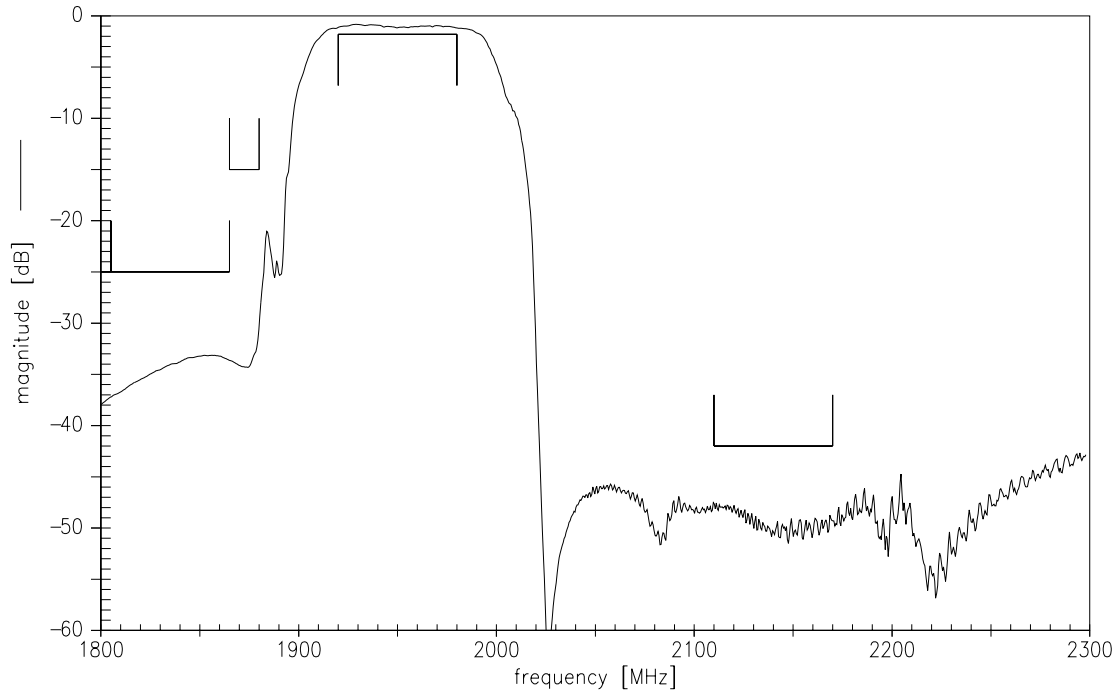


Frequency Response RX-ANT (CW signal)

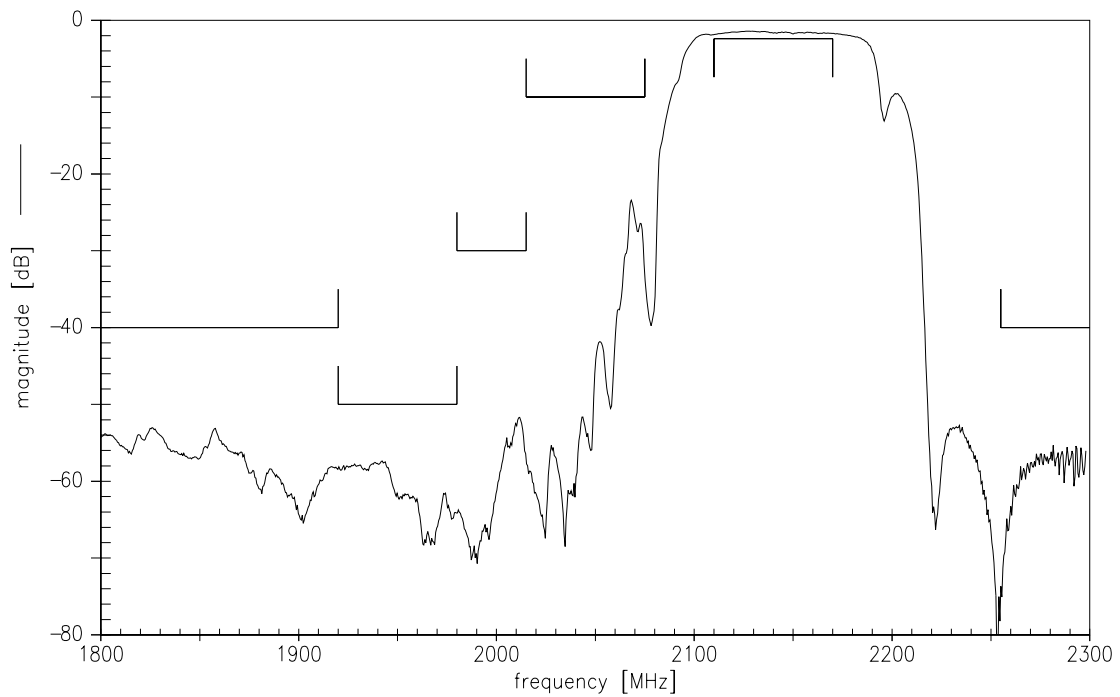




Frequency Response TX-ANT (wideband)

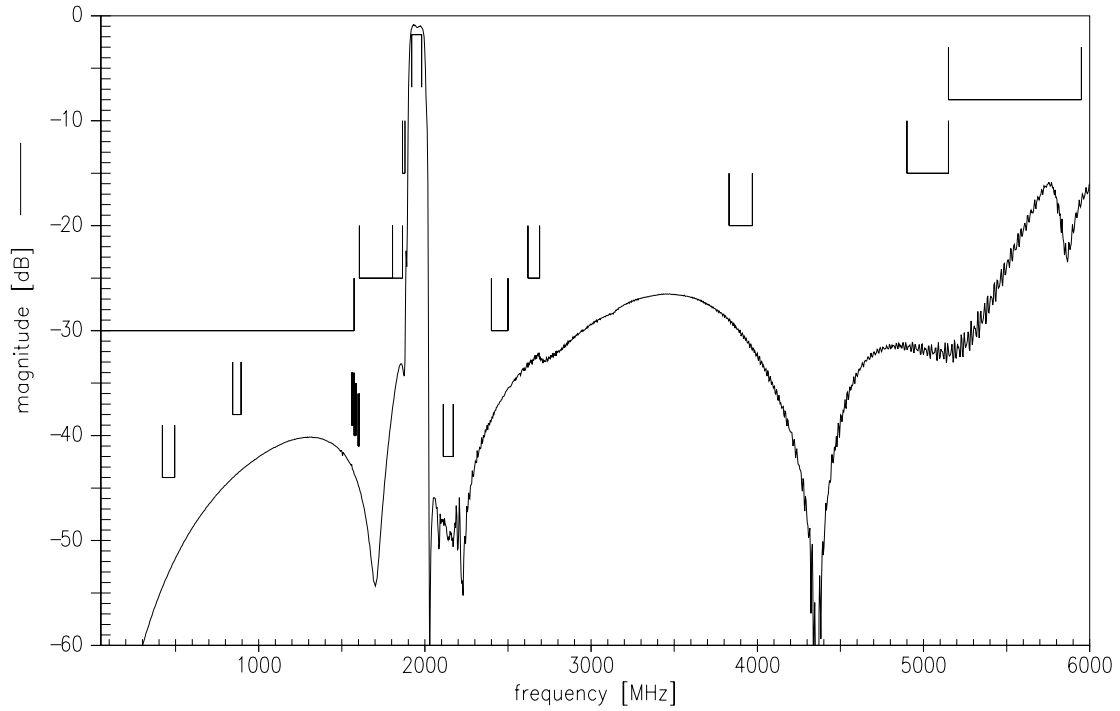


Frequency Response RX-ANT (wideband)

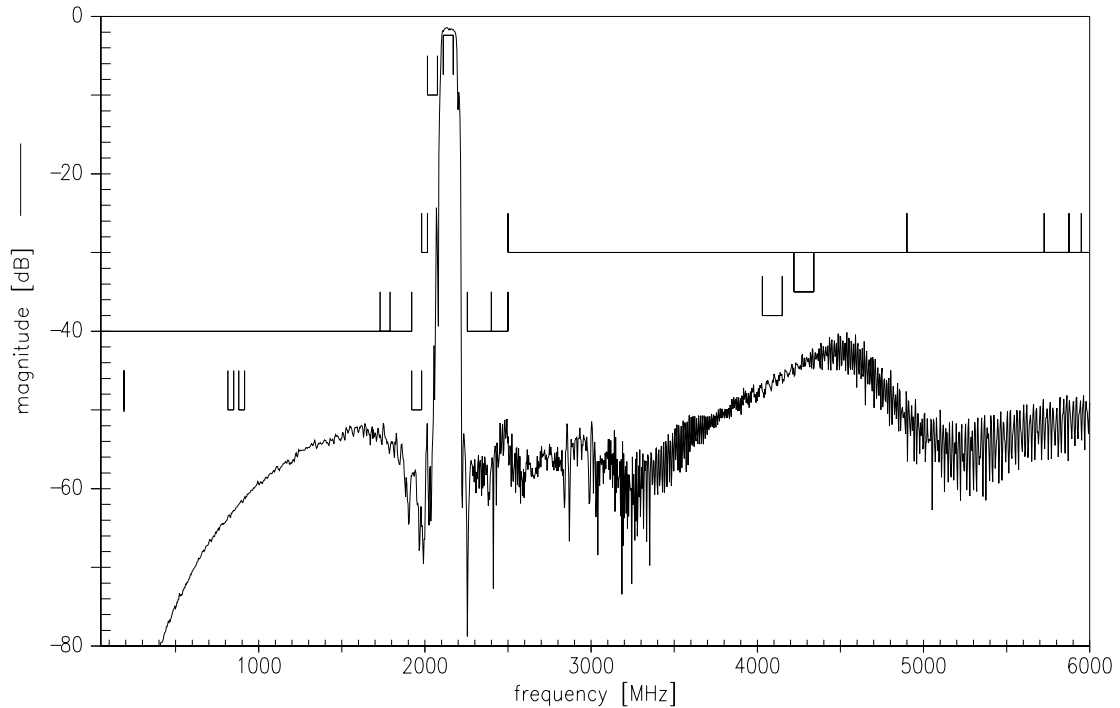


Please read *cautions and warnings* and *important notes* at the end of this document.



Frequency Response TX-RX (CW signal)

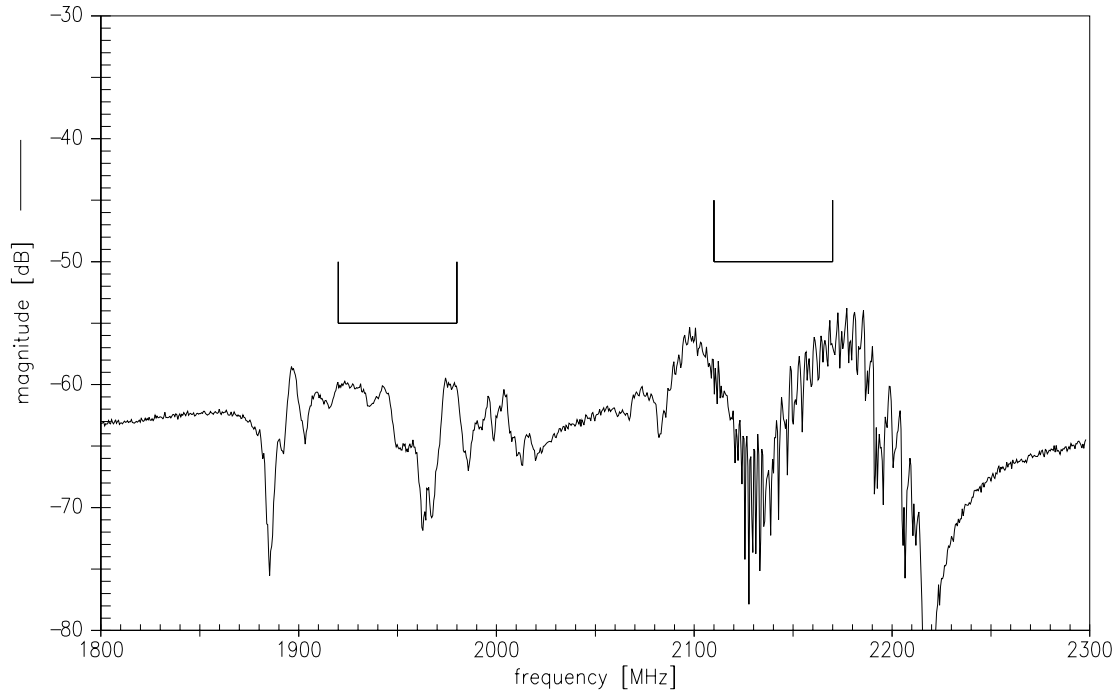

Frequency Response TX-RX (wideband)

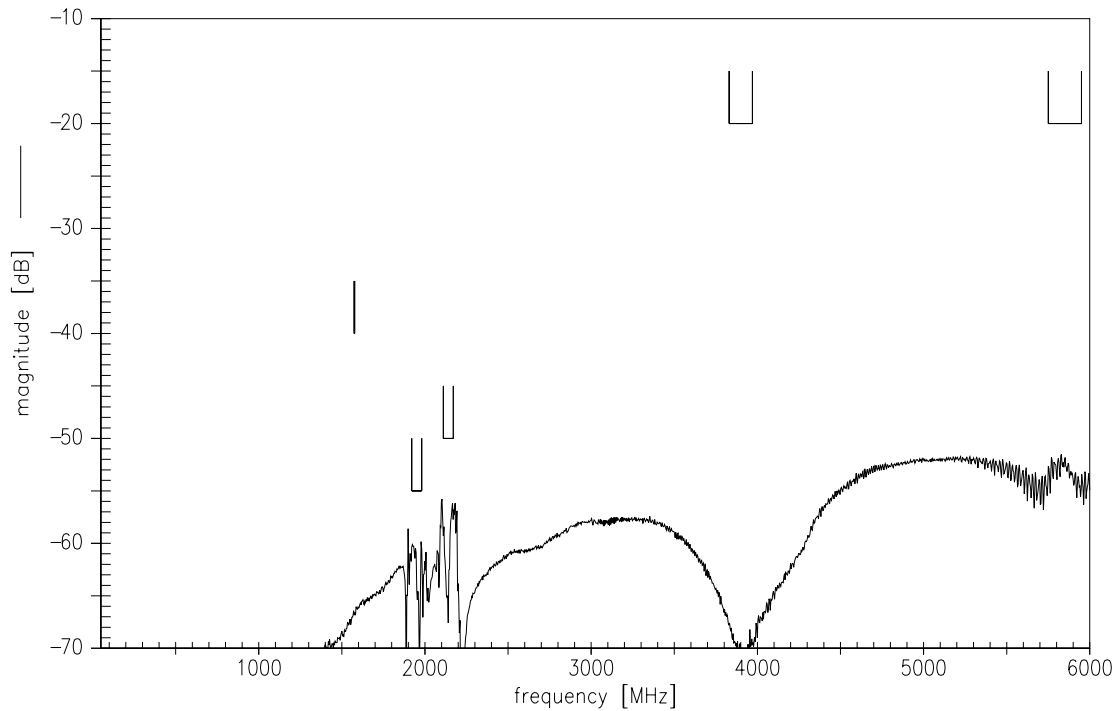

Please read *cautions and warnings* and *important notes* at the end of this document.

SAW Components

B8510

SAW Duplexer

1950.0 / 2140.0 MHz

Data sheet









Return Loss

S_{11} TX-port

S_{33} RX-port

S_{22} ANT-port

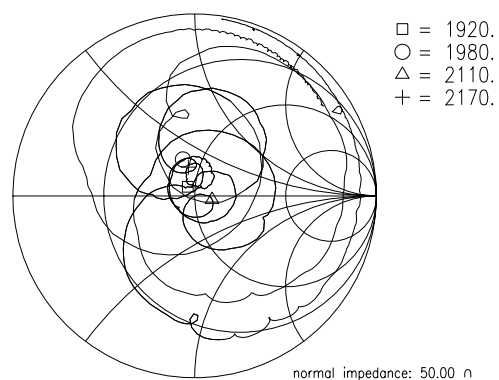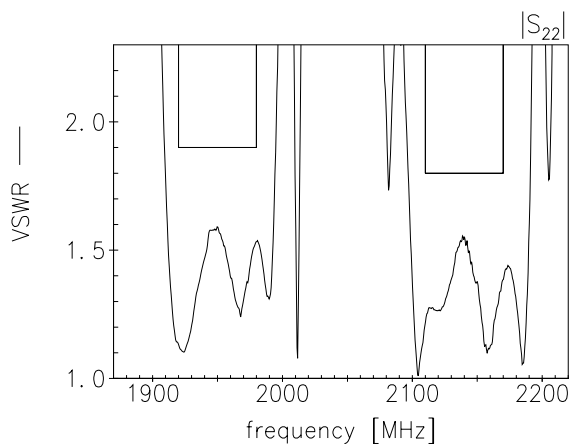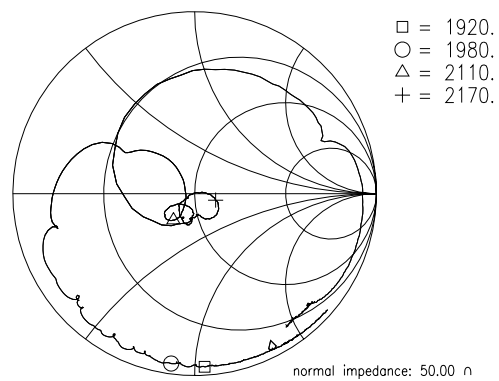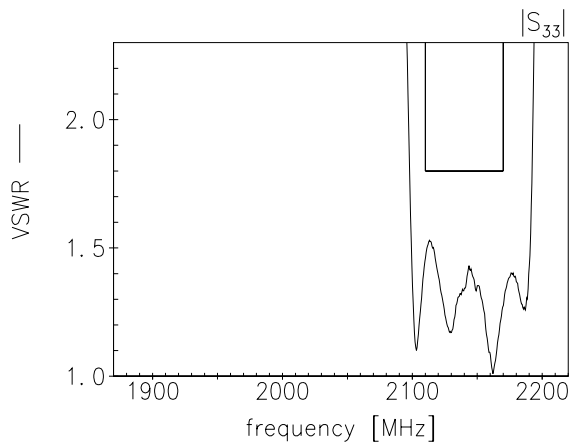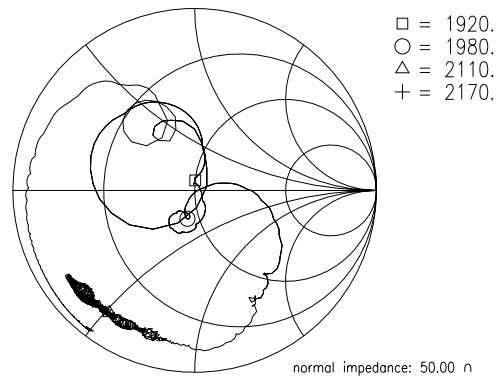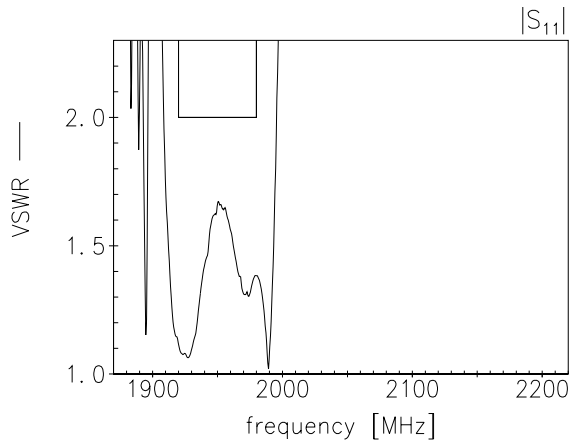

Data sheet



References

Type	B8510
Ordering code	B39212B8510P810
Marking and package	C61157-A8-A76
Packaging	F61074-V8247-Z000
Date codes	L_1126
S-parameters	B8510_NB.s3p B8510_WB.s3p See file header for port/pin assignment table.
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm for a large variety of matching coils.

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2013. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.