

### STEVAL-MKI062V1

## based on MEMS sensors and the STM32F103RE iNEMO: iNErtial MOdule demonstration board

Data brief

#### **Features**

- Two power supply options:
- power connector
- USB connector
- Battery monitoring via LBO signal
- STM32F103RE: high-density performance line ARM-based 32-bit MCU with 256 to 512 KB Flash, USB, CAN, 11 timers, 3 ADCs and 13 communication interfaces
- Boot from user Flash, system memory or SRAM
- LPR530AL: 2-axis gyro (roll, pitch) 300°/s full scale with analog output and optional additional filters
- LPY530AL: 2-axis gyro (pitch, yaw) 300°/s full scale with analog output and optional additional filters
- LIS331DLH: 3-axis accelerometer ±2 g/±4 g/±8 g full scale with SPI digital output
- HMC5843: 3-axis magnetometer with configurable full scale ±4 gauss (max) and I<sup>2</sup>C digital output
- LPS001DL: pressure sensor 300-1100 mbar absolute full scale with I<sup>2</sup>C digital output and barometer
- STLM75: temperature sensor with -55 to +125 °C range and I<sup>2</sup>C digital interface
- Wireless capability, ZigBee<sup>®</sup> module plug-in with InSight™ Port
- MicroSD<sup>TM</sup> card slot
- COM connector with RTS and CTS signals
- USB 2.0 full speed connection
- Reset button
- User LED and button
- RoHS compliant



#### Description

The STEVAL-MKI062V1 is a unique platform designed to demonstrate the performance of ST's most advanced inertial, temperature and pressure sensors. It provides a complete set of inertial measurements from an accelerometer, magnetometer and gyroscopes, as well as data from pressure and temperature sensors to measure environmental conditions.


This 10-DOF (degrees of freedom) inertial system represents a complete hardware platform for a variety of applications including virtual reality, augmented reality, platform stabilization, human machine interfaces and robotics.

To aid in user development and analysis, the STEVAL-MKI062V1 demonstration kit includes a PC GUI for sensor output display and a firmware library to facilitate the use of the demonstration board features.

A complete set of communication interfaces (USB, wireless, COM), small 4.5x5 cm size, and several power supply options make iNEMO a flexible, open evaluation platform.

Schematic diagrams STEVAL-MKI062V1

# Schematic diagrams

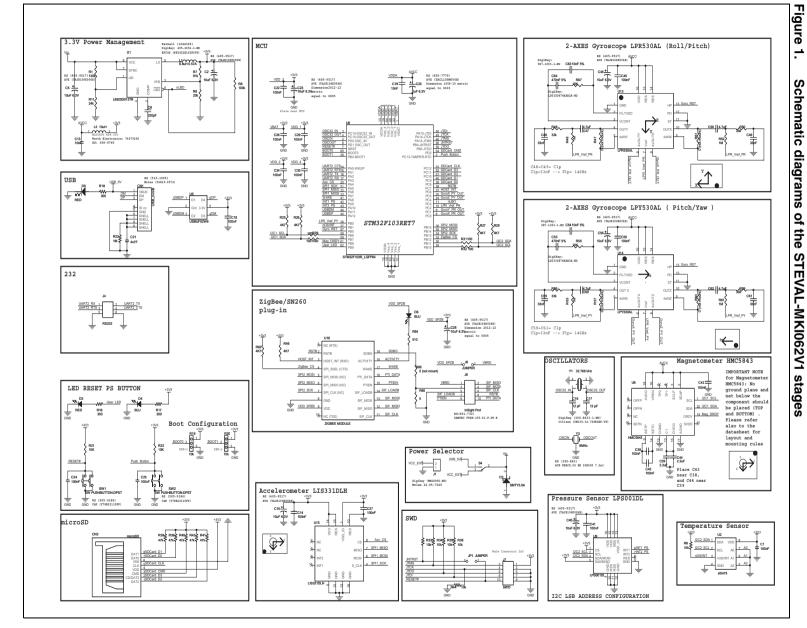

STEVAL-MKI062V1 **Revision history** 

## 2 Revision history

able 1. Document revision history

Date	Revision	Changes
16-Oct-2009	1	Initial release.
10-Feb-2010	2	Updated description on cover page.

### Please Read Carefully:

right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the

All ST products are sold pursuant to ST's terms and conditions of sale.

liability whatsoever relating to the choice, selection or use of the ST products and services described herein. Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no

or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK. UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

