

**Ratings**

Voltage: 300 V  
 Temperature: -40~105 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 2  
 Gauge: 24 AWG 0.2 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing 0.1 \times 26$   
 Resistance at 20 °C: 94.2  $\Omega$  /km max

**Insulator**

Material: FEP  
 Color: red, black  
 Diameter:  $\varnothing 0.92 \pm 0.10$   
 Nominal thickness: 0.13 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min



**Shield**

Material: tinned copper strands  
 Strand size:  $\varnothing 0.08$  mm, 85% min coverage

**Outer jacket**

Material: TPE, 78A  
 Color: black, matte  
 Diameter:  $\varnothing 3.5 \pm 0.20$   
 Nominal thickness: 0.6 mm

**Wire marking:** E339579 UL AWM STYLE 21296 24 AWG 105°C  
 300V VW-1 --- cUL AWM I A 105°C 300V FT1 TENSILITY DGT

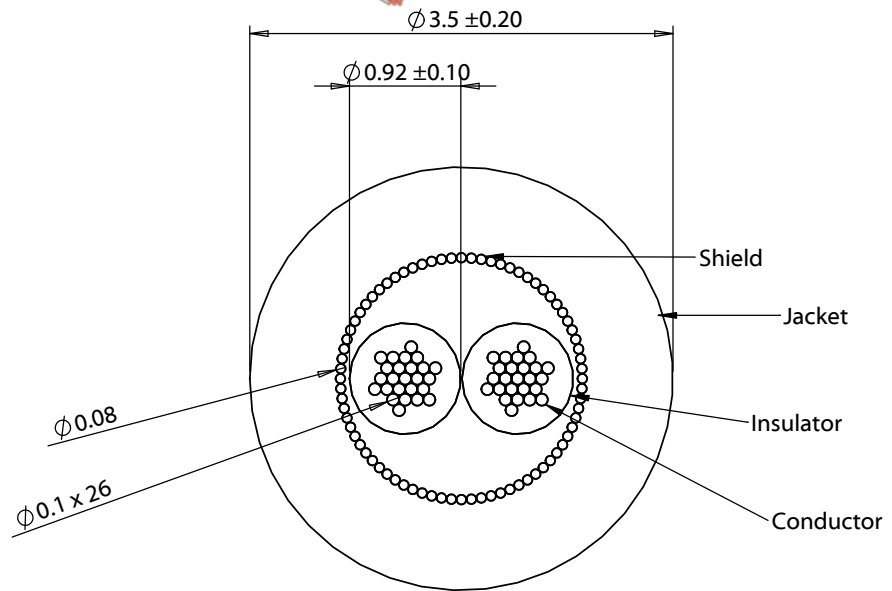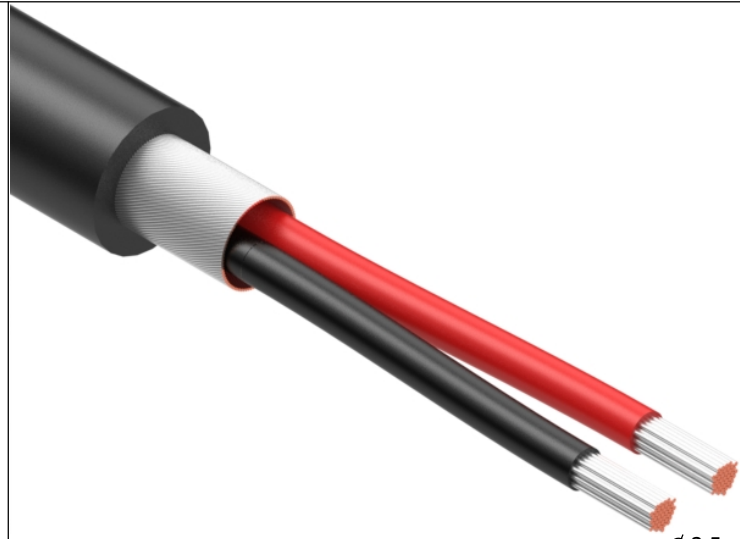

Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	10/26/2021	Initial release	MP <small>Digitally signed by MP Date: 2021.11.01 16:18:01 -07'00'</small>			RoHS compliant Phthalate free Function test: no open, no short circuit, no intermittent	
			Verified:	Description:	Size:	Part number:	
			JD <small>Digitally signed by JD Date: 2021.11.03 10:04:39 -07'00'</small>		Wire, 2C TS, 24 AWG, UL 21296, 300V, 105C, 3.5 mm, shielded, VW-1, TPE	A	30-02413
			Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm		Scale: 16:1		Sheet 1 of 1

5

4

3

2

1