


| | Ŧ | ۵ | нт — | _ m | D | 0 |
|--|---|---|------|-----|---|---|
|--|---|---|------|-----|---|---|

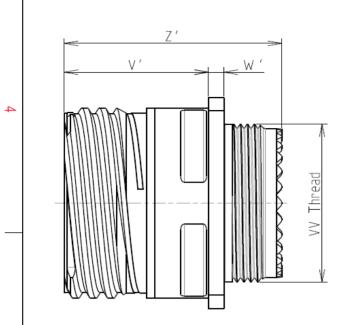

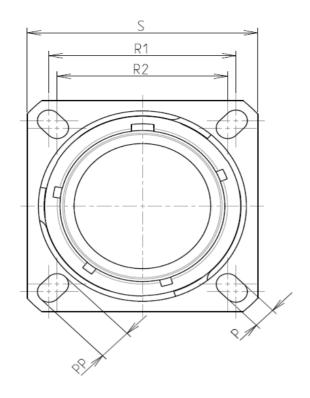



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Composite | |
|-------------------------------------|--|--|
| -Shell Plating | : Olive drab Cadmium | |
| -Insulator | : Thermoplastic | |
| -Contacts | : Copper Alloy | |
| -Seals & Grommet | : Silicon Elastomer | |
| -Contact Plating | : Gold over copper Alloy $0.8 \mu m$ minimum | |
| -Durability | : 500 Mating cycles | |
| -Delivered without Souriau contacts | | |
| -Temperature Range | -65℃ to +175℃ | |
| -Salt Spray | : 2000 hours | |

: 15.4 g ± 10%

8D 0

G

13

J

26

S

F

Ν

L

| Connector dimension | | | |
|---------------------|-------------|--|--|
| Dim | Nominal | | |
| Р | 3.25±0.2 | | |
| РР | 4.93±0.2 | | |
| R1 | 23.01 | | |
| R2 | 20.62 | | |
| S | 28.6±0.3 | | |
| ۷' | 19.5+1.4/-0 | | |
| W' | 2.1/3.65 | | |
| Ζ' | 32 Max | | |
| VV THREAD | M18x1-6g | | |

Delivered W/O Contacts


CONTACT LAYOUT : 13-26

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : N

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

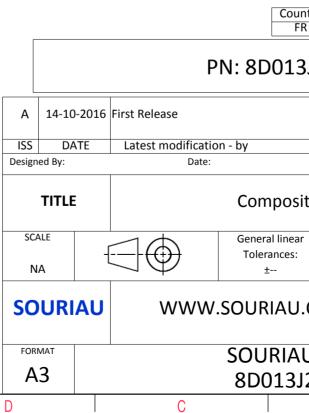

| Φ | | > | | |
|--|--|--------|-------|--|
| | a | | 4 | |
| | | | | |
| AS EXAMPLE | | | 3 | |
| | mply with by a third party otice.) liction & Control List | | | |
| 3J26SNL | Not Listed | | 2 | |
| | CUSTOMER DRAWING | MOD N° | - | |
| ite Receptacl | te Receptacle 8D series | | | |
| ar | NPRDS / PROJECT 859 | | 1 | |
| .COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | |
| U DRG N° J26SNL-C | | SHEET | | |
| В | A | | - | |
| | | | | |

| - | т | م | <u>п</u> | m | D | 0 |
|---|---|---|----------|---|--|---|
| | | Contact Layout | | | | Panel Cutou |
| 4 | | 26 | | | Â | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| _ | | 2#12 6#22D | 1 | | * * | |
| ω | Ctc A B C D E F 1 2 | 13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0 | | | | Dim ØA ØAA R1 ØT |
| | F | | | | | SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat |
| N | | | | | | PN: 8D013J |
| | | | | | A 14-10-20 ISS DATE Designed By: | 16 First Release Latest modification - by Date: |
| | | | | | TITLE SCALE NA | General linear Tolerances: |
| - | | | | | SOURIA | |
| | Н | G | F | E | FORMAT A3 | SOURIAU 8D013J2 |
| | П | | I F | | | |

