# WWW.PHIHONG.COM



# 51W LED Driver with 2 Channel Constant Current Outputs PDA051B LED Power Supply





#### **Features**

- 2 Channel Output
- OVP, OCP, OTP and Short-Circuit Protection & Brownout Protection
- IP65
- Class 2 Output per UL1310
- THD <20% &  $\geq 0.9$  Power Factor

# **Applications**

Troffers

## **Safety Approvals**

• cUL/UL 8750

• Class 2 Output per UL1310

## **Mechanical Characteristics**

• Length: 242mm (9.53in)

• Width: 43.5mm (1.71in)

• Height: 30.5mm (1.2in)

• Weight: 650g

# **Output Specifications**

## Channel 1~2

Model	DC Output Voltage			Output	Output
	Min.	Тур.	Max.	Current	Power
PDA051B-700G	30V	33V	36V	700mA	25.5W

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

## PDA051B Characteristics

# **WWW.PHIHONG.COM**

#### **INPUT:**

## **AC Input Voltage Rating**

108~304VAC

# Nominal AC Input Voltage

120 to 277VAC

# **AC Input Frequency**

47~63 Hz

#### **Maximum Input Current**

 $\leq 0.64A$ 

## Leakage Current

0.75mA maximum

#### **Power Factor**

 $\geq 0.9$ 

#### **THD**

< 20%

#### **OUTPUT:**

#### **Output Current Ripple**

450mA(p-p)

#### **Efficiency**

81% at 120VAC

83% at 277VAC

Typical Efficiency 85%

#### **Environmental:**

## **Temperature**

Operation case

0 to Tc +70°C

Non-operation

-40 to +85°C

Operating Humidity

10% to 95%

#### **EMC**

FCC 47 CFR Part 15, Class A

#### **Immunity**

IEC61000-4-2

IEC61000-4-5

IEC61000-4-11

#### Dielectric Withstand (Hi-pot) Test

Primary to secondary: 3000VAC for 1 minute, 10mA

#### **Insulation Resistance**

Primary to secondary: >5M Ohm 500VDC, 1 Minute

#### **Short-Circuit Protection**

Latch requires power cycle to restart

#### **Output Over-voltage Protection**

Max Voltage Limit 63V

## **Over Temperature Protection**

Max Temperature Limit 85°C


# **Input / Output Connections**

	Color	Specification	Length	
Input	Black	AWG18 Solid Wire	260,,,,,,	
	White	AWG18 Solid Wire	360mm	
Output	Red(+)	AWG18 Solid Wire	200,,,,,,	
	Blue(-)	AWG18 Solid Wire	200mm	
Aux	Green/	AWG18 Solid Wire	220mm	
	Yellow	AWG16 Solid Wile	220IIIII	


#### Warranty

5 Years


# Dimesino Diagram unit: mm

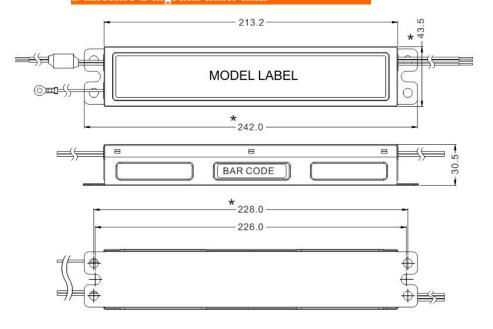


Power Factor vs. Load

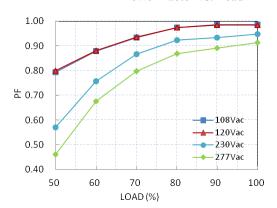

Lifetime vs. Tc

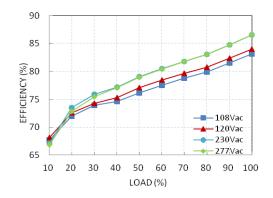

Total Harmonic Distortion vs. Load

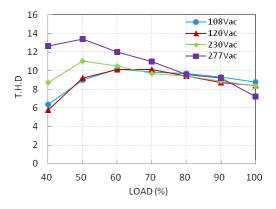

Efficiency vs. Load

