

6

5

4

3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/16	

D

D

C




C

B

B

A

A

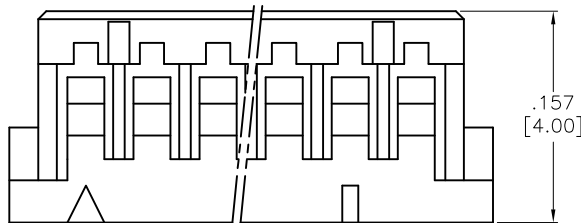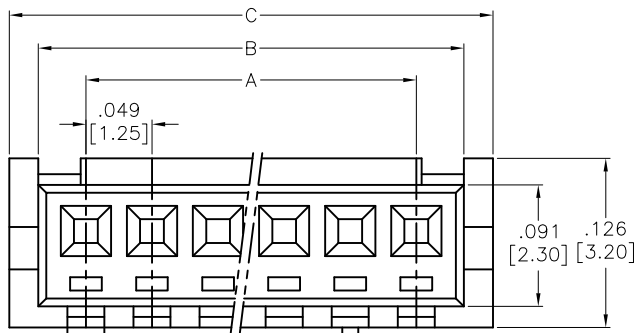

**SPECIFICATIONS:**

Material:  
 Insulator: Nylon66, rated UL 94V-0  
 Insulator color: Beige

**Electrical:**  
 Voltage rating: 250 VAC/DC  
 Current rating: 1A AC/DC  
 Contact resistance: 10 mohms max  
 Insulation resistance: 1,000Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.



Positions: 2 thru 10, 11, 12, 14, 15, 20, 25, 30  
 A = .049 [1.25] X No. of Spaces  
 B = .049 [1.25] X No. of Spaces + .071 [1.80]  
 C = .049 [1.25] X No. of Spaces + .114 [2.90]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES			
.X ± .10	Ø.X ± .10	TITLE 1.25mm CRIMP HOUSING SINGLE ROW 2 THRU 30 POSITIONS, COLOR: GRAY	
.XX ± .020	Ø.XX ± .015		
.XXX ± .015	Ø.XXX ± .010		
APPROVALS		DATE	
DRAWN	HR	3/17/16	
CHECKED	SC	3/17/16	
APPROVED			
SIZE X	PART NO. 125CH-C1-XX	REV. -	
REF: S00015T	SCALE: NTS	SHEET 1 OF 1	

6

5

4

3

2

1