

Surge protection device set - PV-SET 1000 DC/AC - 2804458

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection in IP65 housing for the AC and DC sides of an inverter for single string photovoltaic systems up to 1000 V DC.

Product Features

- ✓ Plugs can be checked with CHECKMASTER
- ✓ Pre-assembled protection solutions
- ✓ Mechanical coding of all slots
- ✓ Optical, mechanical status indication for the individual arresters
- ✓ Type 2 consistent plug-in surge arresters



Key commercial data

Packing unit	1 pc
Custom tariff number	85363030
Country of origin	Germany

Technical data

Dimensions

Height	180 mm
Width	254 mm
Depth	110 mm

Ambient conditions

Degree of protection	IP65
Ambient conditions	A, B
Ambient temperature (operation)	-25 °C ... 40 °C
Altitude	max. 2000 m

Surge protection device set - PV-SET 1000 DC/AC - 2804458

Technical data

General

Housing material	PBT / PA
Inflammability class according to UL 94	V0
Color	light grey RAL 7035
Standards for air and creepage distances	IEC 61643-1
	IEC 60664-1
	EN 61643-11
Mounting type	Surface/Wall mounting
Type	Installation housing
Number of positions	2
Surge protection fault message	Optical
Direction of action	DC: (L+)-PE & (L-)-PE & (L+)-(L-) / AC: L-N & N-PE

PV protective circuit AC side

Rated voltage U_n	230 V AC
Rated operating voltage U_e	230 V AC
Rated surge voltage resistance U_{imp}	6 kV
Rated insulation voltage U_i	250 V
Rated current I_n	80 A
Rated frequency f_n	50 Hz (60 Hz)

PV protective circuit DC side

Maximum continuous operating voltage U_{CPV}	1000 V DC
Rated surge voltage resistance U_{imp}	6 kV
Rated insulation voltage U_i	1000 V DC
Short-circuit current rating I_{SCPV}	80 A

Protective circuit

IEC test classification	II
	T2
EN type	T2
Nominal voltage U_N	230 V AC (U_N)
Maximum continuous operating voltage U_C	1000 V DC
Maximum continuous operating voltage U_C (L-N)	335 V AC
Maximum continuous operating voltage U_C (N-PE)	260 V AC
U_T (TOV-proof)	415 V AC (5 s)
U_T (TOV-safe)	1200 V AC (200 ms / N-PE)
Nominal frequency f_N	50 Hz (60 Hz)
Rated load current I_L	≤ 80 A DC

Surge protection device set - PV-SET 1000 DC/AC - 2804458

Technical data

Protective circuit

Residual current I_{PE}	$\leq 1 \mu\text{A}$ (AC)
	$\leq 20 \mu\text{A}$ (DC)
Standby power consumption P_C	$\leq 20 \text{ mW}$ (DC)
Max. discharge current I_{max} (8/20) μs	30 kA (DC)
	40 kA (AC)
Nominal discharge current I_n (8/20) μs	15 kA (DC)
	20 kA (AC)
Impulse discharge current (10/350) μs , peak value I_{imp}	12 kA (N-PE)
Front of wave sparkover voltage at 6 kV (1.2/50) μs (N-PE)	$\leq 1.5 \text{ kV}$
Voltage protection level U_p	$\leq 5 \text{ kV}$
Voltage protection level U_p (L-N)	$\leq 1.5 \text{ kV}$
Voltage protection level U_p (L-PE)	$\leq 2 \text{ kV}$
Voltage protection level U_p (N-PE)	$\leq 1.5 \text{ kV}$
Voltage protection level U_p (L+) - (L-)	$\leq 5 \text{ kV}$
Voltage protection level U_p (L+/L-) - PE	$\leq 5 \text{ kV}$
Residual voltage (L-N)	$\leq 1.2 \text{ kV}$ (at 5 kA)
Residual voltage (L-PE)	$\leq 1.2 \text{ kV}$ (at 5 kA)
Residual voltage (N-PE)	$\leq 0.15 \text{ kV}$ (at 5 kA)
Residual voltage (L+) - (L-)	$\leq 5 \text{ kV}$ (at 15 kA)
	$\leq 4.5 \text{ kV}$ (at 10 kA)
	$\leq 4 \text{ kV}$ (at 5 kA)
Residual voltage (L+/L-) - PE	$\leq 5 \text{ kV}$ (at 15 kA)
	$\leq 4.5 \text{ kV}$ (at 10 kA)
	$\leq 4 \text{ kV}$ (at 5 kA)
Response time	$\leq 25 \text{ ns}$
Response time (N-PE)	$\leq 100 \text{ ns}$
Max. backup fuse with branch wiring	$\leq 125 \text{ A}$ (gL/gG (AC side))
Max. backup fuse with V-type through wiring	$\leq 80 \text{ A}$ (gL/gG (AC side) with 16 mm ²)
Short-circuit resistance I_p with max. backup fuse (effective)	25 kA (AC side)
Follow current quenching capacity I_f (N-PE)	100 A

Connection, protective circuit

Connection method	Screw terminal blocks
Connection type IN	Biconnect screw terminal block
Connection type OUT	Biconnect screw terminal block
Connection method	Biconnect terminal block
Screw thread	M5

Surge protection device set - PV-SET 1000 DC/AC - 2804458

Technical data

Connection, protective circuit

Tightening torque	4.5 Nm
Stripping length	16 mm
Conductor cross section stranded min.	1.5 mm ²
Conductor cross section stranded max.	25 mm ²
Conductor cross section solid min.	1.5 mm ²
Conductor cross section solid max.	35 mm ²
Conductor cross section AWG/kcmil min.	15
Conductor cross section AWG/kcmil max	2

Standards and Regulations

Standards/regulations	IEC 61643-1 2005
	EN 61643-11/A11 2007

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130805
eCl@ss 7.0	27130805
eCl@ss 8.0	27130805

ETIM

ETIM 2.0	EC000941
ETIM 3.0	EC000941
ETIM 4.0	EC000941
ETIM 5.0	EC000941

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Surge protection device set - PV-SET 1000 DC/AC - 2804458

Approvals

Approvals

Approvals

GOST

Ex Approvals


Approvals submitted

Approval details



Drawings

Dimensioned drawing

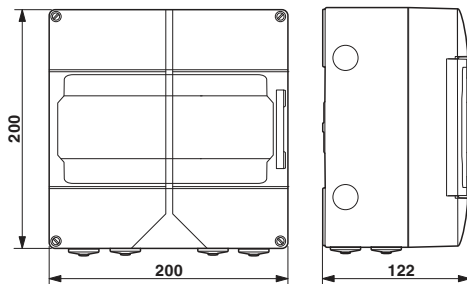

Circuit diagram

