


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		RELEASED PER ECN-22-152543	06MAY2022	JG	DZ



- ALL MATERIALS, COMPONENTS AND PROCESS SHALL COMPLY WITH TEC-138-702. (CONTAINS NO BANNED OR RESTRICTED SUBSTANCES).
- NO REACH SVHC SHALL BE CONTAINED ABOVE THE THRESHOLD AS DEFINED IN REACH SVHC COMPLIANCE DEFINITION IN ANNEX A OF TEC-138-702.
- ASSEMBLY TO BE TESTED FOR CONTINUITY, OPENS, SHORTS, AND SIGNAL INTEGRITY.
- CABLE BEND RADIUS 7X BUNDLED CABLE OD.
- SEE SHEET 2 FOR WIRING SCHEMATIC.
- CONNECTORS ARE GEN-Z COMPLIANT.

△ LABEL INFORMATION SHOWN BELOW:

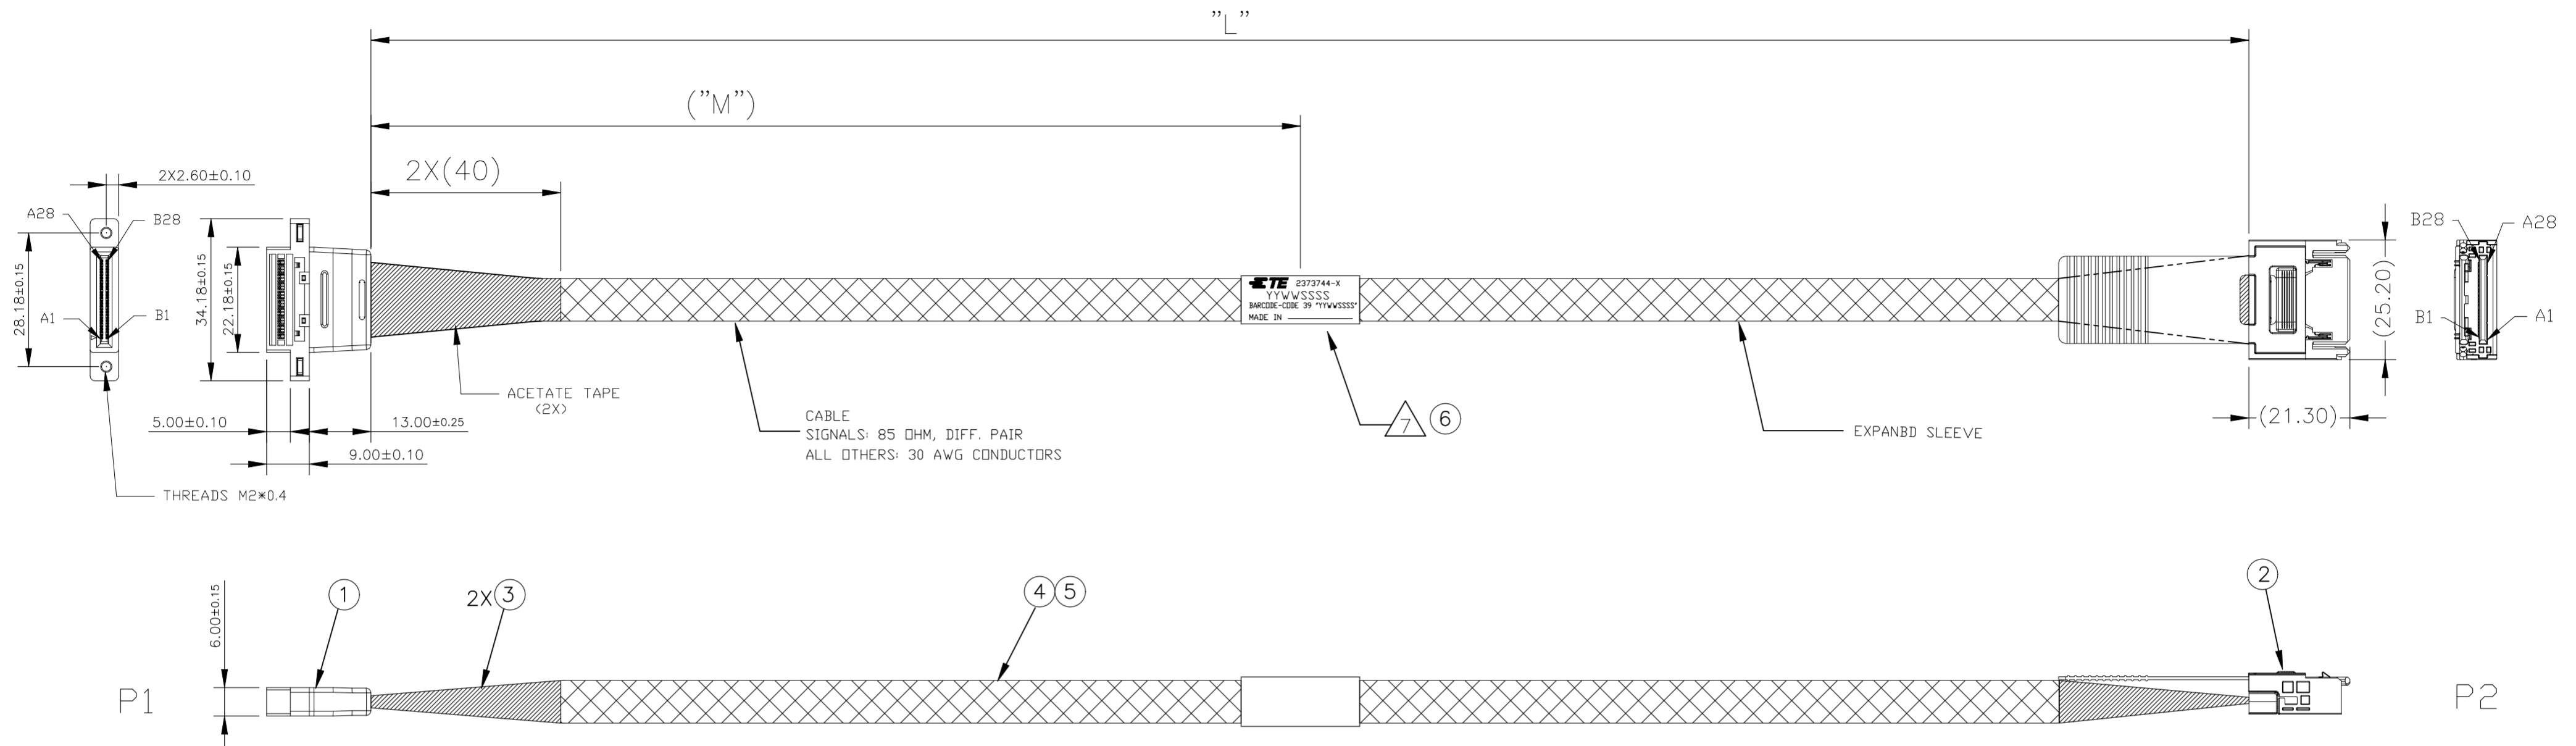

8. SLIVER CABLE PLUG MATES WITH TE SLIVER RECEPTACLE P/N 2332141-X, OR 2332208-X.

△ KEY CHARACTERISTIC PER STANDARD OPERATING PROCEDURE TEC-407-55. APPLIES TO BOTH DIMENSION AND FEATURE CONTROL TOLERANCE.

500	1000+/-15	2373744-2
250	500+/-10	2373744-1
"M"	"L"	TE PN

1	1	1	LABEL	LABEL, SYNTHETIC PAPER	6
AR	AR	AR	SLEEVE	EXPAND SLEEVE, BLACK, HF	5
AR	-	MR	CABLE WIRE	CABLE, 29AWG, 85OHM, DIFF PAIRS, VW-1	4
-	AR	CABLE, 30AWG, 85OHM, DIFF PAIRS, VW-1			
AR	AR	MR	ACETATE TAPE	ACETATE TAPE, BLACK	3
1	1	PC	CABLE PLUG	SLIVER 2.0 1C STR, PULL TAB	2
1	1	PC	CABLED RECEPTACLE	SLIVER 2.0 1C CABLED RECEPTACLE	1
-2	-1	U/M	PART NAME	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GARNETT WU 25MAY2020	TE Connectivity Ltd.	
DIMENSIONS: mm		CHK -	NAME S;LIVER 2.0 1C LEAD FRAME TO SLIVER 2.0 1C 85OHM	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD DAVID ZHANG 25MAY2020	DRAWING NO A2 00779 C=2373744	
MATERIAL -		FINISH -	WEIGHT -	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 1:1	SHEET 1 OF 2

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

P1		WIRE TYPE	P2		P1		WIRE TYPE	P2	
PIN NUMBER	PIN DEFINE		PIN DEFINE	PIN NUMBER	PIN NUMBER	PIN DEFINE		PIN DEFINE	PIN NUMBER
A1	GND		GND	A1	B1	P12V_OCP_V3_1		P12V_OCP_V3_1	B1
A2	GND		GND	A2	B2	P12V_OCP_V3_1		P12V_OCP_V3_1	B2
A3	GND		GND	A3	B3	P12V_OCP_V3_1		P12V_OCP_V3_1	B3
A4	GND		GND	A4	B4	P12V_OCP_V3_1		P12V_OCP_V3_1	B4
A5	GND		GND	A5	B5	P12V_OCP_V3_1		P12V_OCP_V3_1	B5
A6	GND		GND	A6	B6	P12V_OCP_V3_1		P12V_OCP_V3_1	B6
A7	SMB_BMC_OCP_V3_1_A_SCL		SMB_BMC_OCP_V3_1_A_SCL	A7	B7	OCP_V3_1_ISO_BIF0_N		OCP_V3_1_ISO_BIF0_N	B7
A8	SMB_BMC_OCP_V3_1_A_SDA		SMB_BMC_OCP_V3_1_A_SDA	A8	B8	OCP_V3_1_ISO_BIF1_N		OCP_V3_1_ISO_BIF1_N	B8
A9	SMB_BMC_OCP_V3_1_A_RST_N		SMB_BMC_OCP_V3_1_A_RST_N	A9	B9	OCP_V3_1_ISO_BIF2_N		OCP_V3_1_ISO_BIF2_N	B9
A10	PRSNATA#		PRSNATA#	A10	B10	RST_OCP_V3_1_A_0_N		RST_OCP_V3_1_A_0_N	B10
A11	RST_OCP_V3_1_A_1_N		RST_OCP_V3_1_A_1_N	A11	B11	P3V3_OCP_V3_1		P3V3_OCP_V3_1	B11
A12	OCP_V3_1_PRSNB2_N		OCP_V3_1_PRSNB2_N	A12	B12	OCP_V3_1_A_AUX_PWR_EN		OCP_V3_1_A_AUX_PWR_EN	B12
A13	GND		GND	A13	B13	GND		GND	B13
A14	CLK_100M_DB2001_OCP_V3_1_D_DN		CLK_100M_DB2001_OCP_V3_1_D_DN	A14	B14	CLK_100M_DB2001_OCP_V3_1_C_DN		CLK_100M_DB2001_OCP_V3_1_C_DN	B14
A15	CLK_100M_DB2001_OCP_V3_1_D_DP		CLK_100M_DB2001_OCP_V3_1_D_DP	A15	B15	CLK_100M_DB2001_OCP_V3_1_C_DP		CLK_100M_DB2001_OCP_V3_1_C_DP	B15
A16	GND		GND	A16	B16	GND		GND	B16
A17	P3E_CPU0_PCIE3_RX_DP<0>		P3E_CPU0_PCIE3_RX_DP<0>	A17	B17	P3E_CPU0_PCIE3_TX_C_DP<0>		P3E_CPU0_PCIE3_TX_C_DP<0>	B17
A18	P3E_CPU0_PCIE3_RX_DN<0>		P3E_CPU0_PCIE3_RX_DN<0>	A18	B18	P3E_CPU0_PCIE3_TX_C_DN<0>		P3E_CPU0_PCIE3_TX_C_DN<0>	B18
A19	GND		GND	A19	B19	GND		GND	B19
A20	P3E_CPU0_PCIE3_RX_DP<1>		P3E_CPU0_PCIE3_RX_DP<1>	A20	B20	P3E_CPU0_PCIE3_TX_C_DN<1>		P3E_CPU0_PCIE3_TX_C_DN<1>	B20
A21	P3E_CPU0_PCIE3_RX_DN<1>		P3E_CPU0_PCIE3_RX_DN<1>	A21	B21	P3E_CPU0_PCIE3_TX_C_DP<1>		P3E_CPU0_PCIE3_TX_C_DP<1>	B21
A22	GND		GND	A22	B22	GND		GND	B22
A23	P3E_CPU0_PCIE3_RX_DP<2>		P3E_CPU0_PCIE3_RX_DP<2>	A23	B23	P3E_CPU0_PCIE3_TX_C_DN<2>		P3E_CPU0_PCIE3_TX_C_DN<2>	B23
A24	P3E_CPU0_PCIE3_RX_DN<2>		P3E_CPU0_PCIE3_RX_DN<2>	A24	B24	P3E_CPU0_PCIE3_TX_C_DP<2>		P3E_CPU0_PCIE3_TX_C_DP<2>	B24
A25	GND		GND	A25	B25	GND		GND	B25
A26	P3E_CPU0_PCIE3_RX_DP<3>		P3E_CPU0_PCIE3_RX_DP<3>	A26	B26	P3E_CPU0_PCIE3_TX_C_DP<3>		P3E_CPU0_PCIE3_TX_C_DP<3>	B26
A27	P3E_CPU0_PCIE3_RX_DN<3>		P3E_CPU0_PCIE3_RX_DN<3>	A27	B27	P3E_CPU0_PCIE3_TX_C_DN<3>		P3E_CPU0_PCIE3_TX_C_DN<3>	B27
A28	GND		GND	A28	B28	GND		GND	B28

WIRE DIAGRAM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GARNETT WU 25MAY2020	TE Connectivity Ltd.																			
DIMENSIONS: mm		CHK -																				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD DAVID ZHANG 25MAY2020	NAME S;LIVER 2.0 1C LEAD FRAME TO SLIVER 2.0 1C 85OHM																			
<table border="0"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	PRODUCT SPEC -	SIZE A2	
0 PLC	±	-																				
1 PLC	±	-																				
2 PLC	±	-																				
3 PLC	±	-																				
4 PLC	±	-																				
ANGLES	±	-																				
MATERIAL -		FINISH -	APPLICATION SPEC -	CAGE CODE 00779																		
		WEIGHT -	DRAWING NO C=2373744	RESTRICTED TO -																		
CUSTOMER DRAWING			SCALE 1:1	SHEET 2 OF 2																		
			REV A																			