


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00011	Connector, dc plug, 5.5x2.5xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC	1	
3	24-00016	Overmold, PVC, black	1	

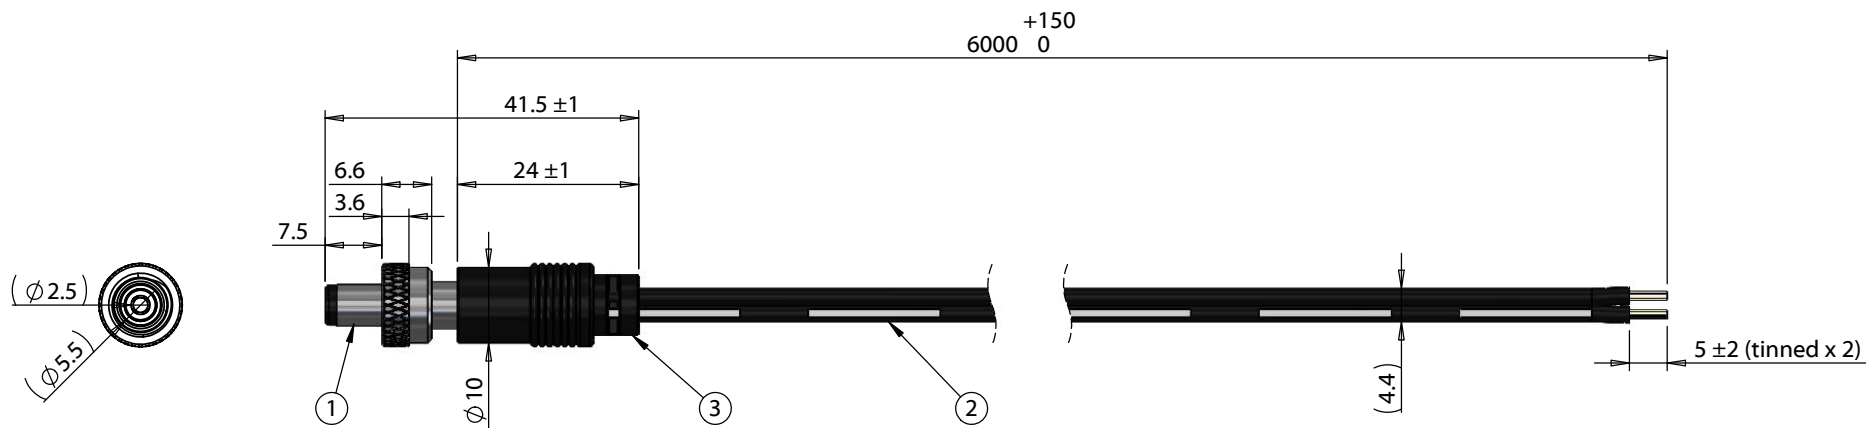

Notes:
Cable rated for 48 V, 6.5 A

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram	
50-00011	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared: MP <small>Digitally signed by MP Date: 2022.11.02 11:21:05 -0700</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	11/2/2022	Initial release	Verified: JD <small>Digitally signed by JD Date: 2022.11.09 16:53:38 -0800</small>	RoHS compliant	
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
			Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 6000 mm, 5.5x2.5x7.5mm 50-00011 locking dc plug to 5mm tinned, 18 AWG, UL2468, 30-00007 wire	
				Size: A	Part number: 10-05241
				Scale: 1:1	Sheet 1 of 1

5 4 3 2 1