




CMC025016010H

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1) 800-245-3984
 HK Sales: (852) 3102-9337
 magnetics@spang.com
 www.mag-inc.com

Dimensions				
	Bare (mm)	tol +/-	Case (mm)	tol +/-
OD (A)	25.0	typ	27.5	0.40
ID (B)	16.0	typ	13.8	0.40
HT (C)	10.0	0.20	12.6	0.40

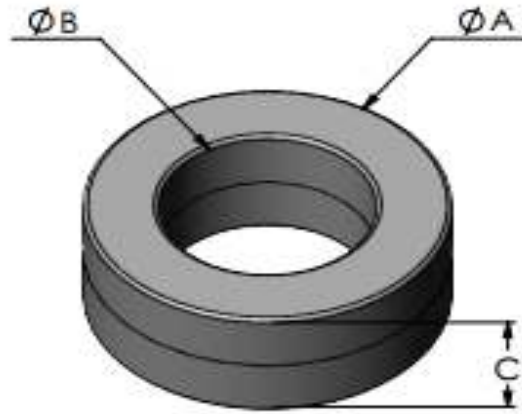

A_L ($\mu\text{H}/\text{T}^2$)	Conditions	
65.5 +/- 30%	10 kHz	1.0 V
14.3 Min	100 kHz	1.0 V

A_e (cm^2)	L_e (cm)	Weight (g)	Color	
0.37	6.43	17.6 Ref	Black	PBT Class B 130°C

Material	Nanocrystalline
Saturation Flux Density	1.25 Tesla
Initial permeability	80,000
Curie Temperature	560 °C
Continuous working Temperature	-40 °C to +130 °C

