


# LWD-SERIES

Dual output 15W ~ 50W

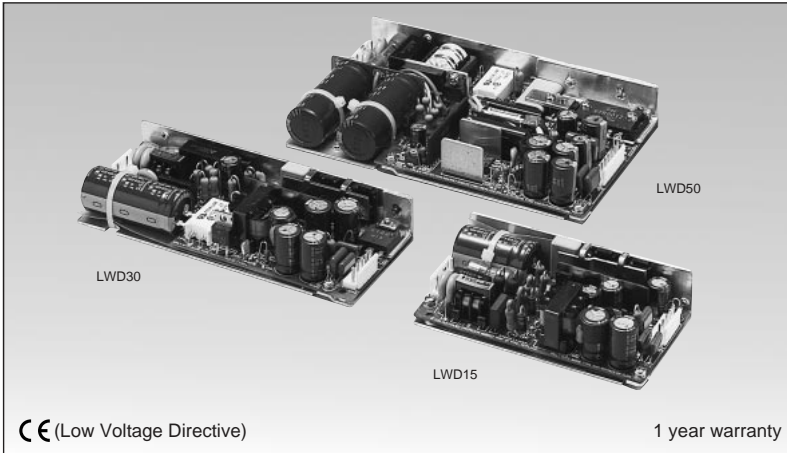

## Model name **LWD 50-1212**

Name of series    Output power : 15W, 30W, 50W    Output voltage (Ex. of display)    1212 : 12V, 12V  
0512 : 5V, 12V  
0524 : 5V, 24V

## Features

- **CE** marking (Low Voltage Directive): E. L. V output
- Wide input voltage range  
85 ~ 265VAC universal input
- Low profile, 15 models, Dual output 15W ~ 50W  
Thickness: Approx. 1 inch (26mm)
- Isolation between dual outputs
- 1 year warranty

## Specifications

<b>1. Input voltage range</b>	85 ~ 265VAC (47 ~ 440 kHz), DC110 ~ 350V universal input
<b>2. Output voltage range</b>	CH1: +5%, CH2: Fixed
<b>3. Cooling</b>	Convection Cooling
<b>4. Operating ambient temperature (Standard mounting)</b>	0 ~ +60°C Output derating 0 ~ +40°C : 100%, +50°C : 60%, +60°C : 40%
<b>5. Withstand voltage</b>	Input-output: 2kVAC, input-FG: 2kVAC for 1 min.
<b>6. Safety standard</b>	Approved by UL1950 , CSA1402C  and EN60950 (Approved as E.L.V output)
<b>7. EMI</b>	Conforms to FCC class A
<b>8. Functions</b>	Over voltage protection (CH1), Over current protection

## Product lineup





Model name	CH	Nominal output voltage	Max. output current	Total max. output power	UL	CSA	EN
LWD15	LWD15-0512	CH1	5V	1.5A	14.7W	○	○
		CH2	12V	0.6A			
	LWD15-0524	CH1	5V	1.5A	14.7W	○	○
		CH2	24V	0.3A			
	LWD15-1212	CH1	12V	0.6A	14.4W	○	○
		CH2	12V	0.6A			
	LWD15-1224	CH1	12V	0.6A	14.4W	○	○
		CH2	24V	0.3A			
LWD15-1515	CH1	15V	0.5A	15.0W	○	○	
	CH2	15V	0.5A				
LWD30	LWD30-0512	CH1	5V	3.0A	29.4W	○	○
		CH2	12V	1.2A			
	LWD30-0524	CH1	5V	3.0A	29.4W	○	○
		CH2	24V	0.6A			
	LWD30-1212	CH1	12V	1.2A	28.8W	○	○
		CH2	12V	1.2A			
	LWD30-1224	CH1	12V	1.2A	28.8W	○	○
		CH2	24V	0.6A			
	LWD30-1515	CH1	15V	1.0A	30.0W	○	○
		CH2	15V	1.0A			

Model name	CH	Nominal output voltage	Max. output current	Total max. output power	UL	CSA	EN
LWD50	LWD50-0512	CH1	5V	5.0A	49.0W	○	○
		CH2	12V	2.0A			
	LWD50-0524	CH1	5V	5.0A	49.0W	○	○
		CH2	24V	1.0A			
	LWD50-1212	CH1	12V	2.0A	48.0W	○	○
		CH2	12V	2.0A			
	LWD50-1224	CH1	12V	2.0A	48.0W	○	○
		CH2	24V	1.0A			
LWD50-1515	CH1	15V	1.6A	48.0W	○	○	
	CH2	15V	1.6A				

○ : Safety standard approved

- Request customer specification for further details of specifications, outline, characteristics, etc.  
Read the instruction manual before usage.
- Contact us about delivery before ordering.




## Recommended Noise Filter

LWD15	LWD30 / LWD50
MAW-1201-22	MAW-1202-22
	
 <b>P134</b>	 <b>P134</b>




# LWD-SERIES

Unit Type Power Supply




## LWD15

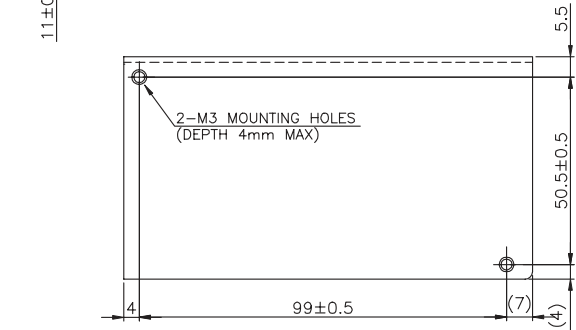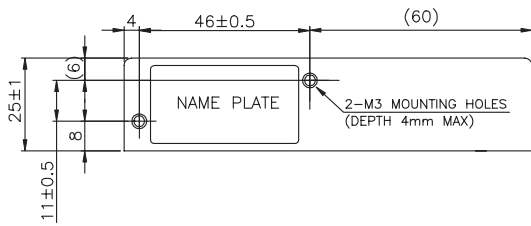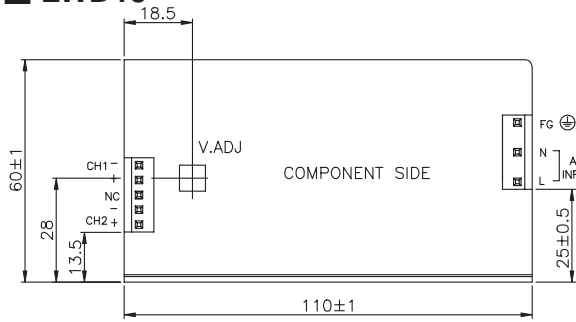

## LWD30

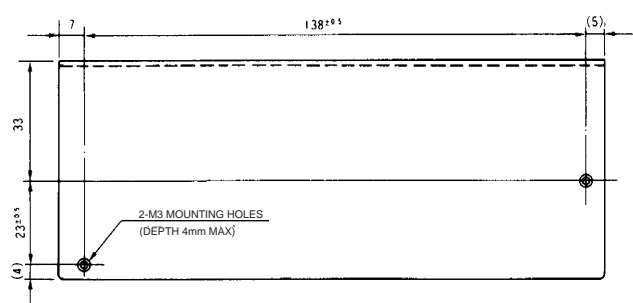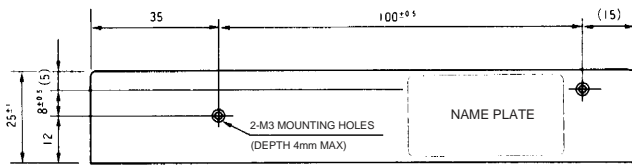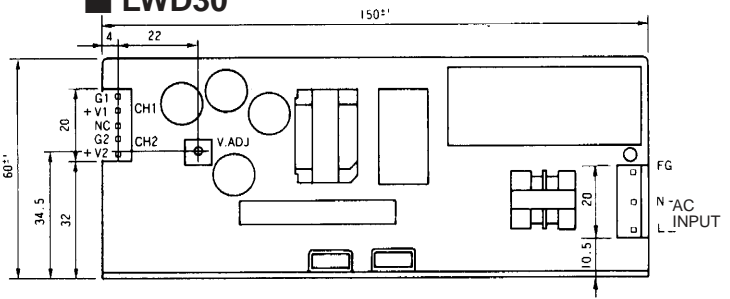


## LWD50

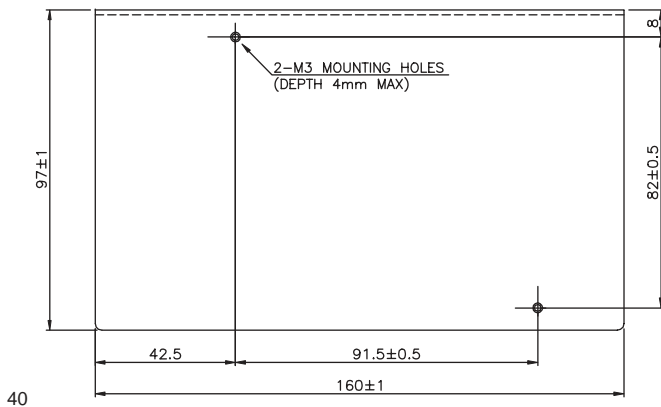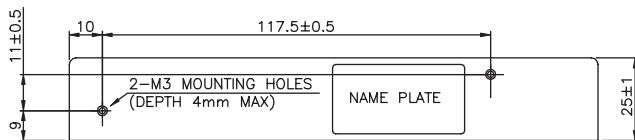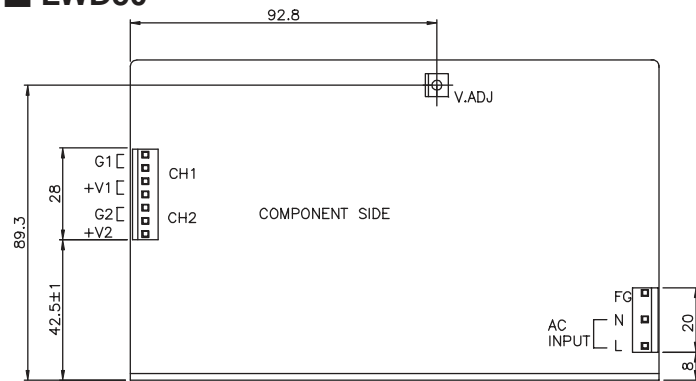


### <Height of LWD-series>


#### ● LWD15



#### ● LWD30



#### ● LWD50



\* Chassis plating dimension shall be 25mm. Dimension including mounting parts shall be 26±1mm.

(Unit: mm)