



SW2014



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release		SEE ECN# 013460	GRW	5/31/2016	KAC	5/31/2016

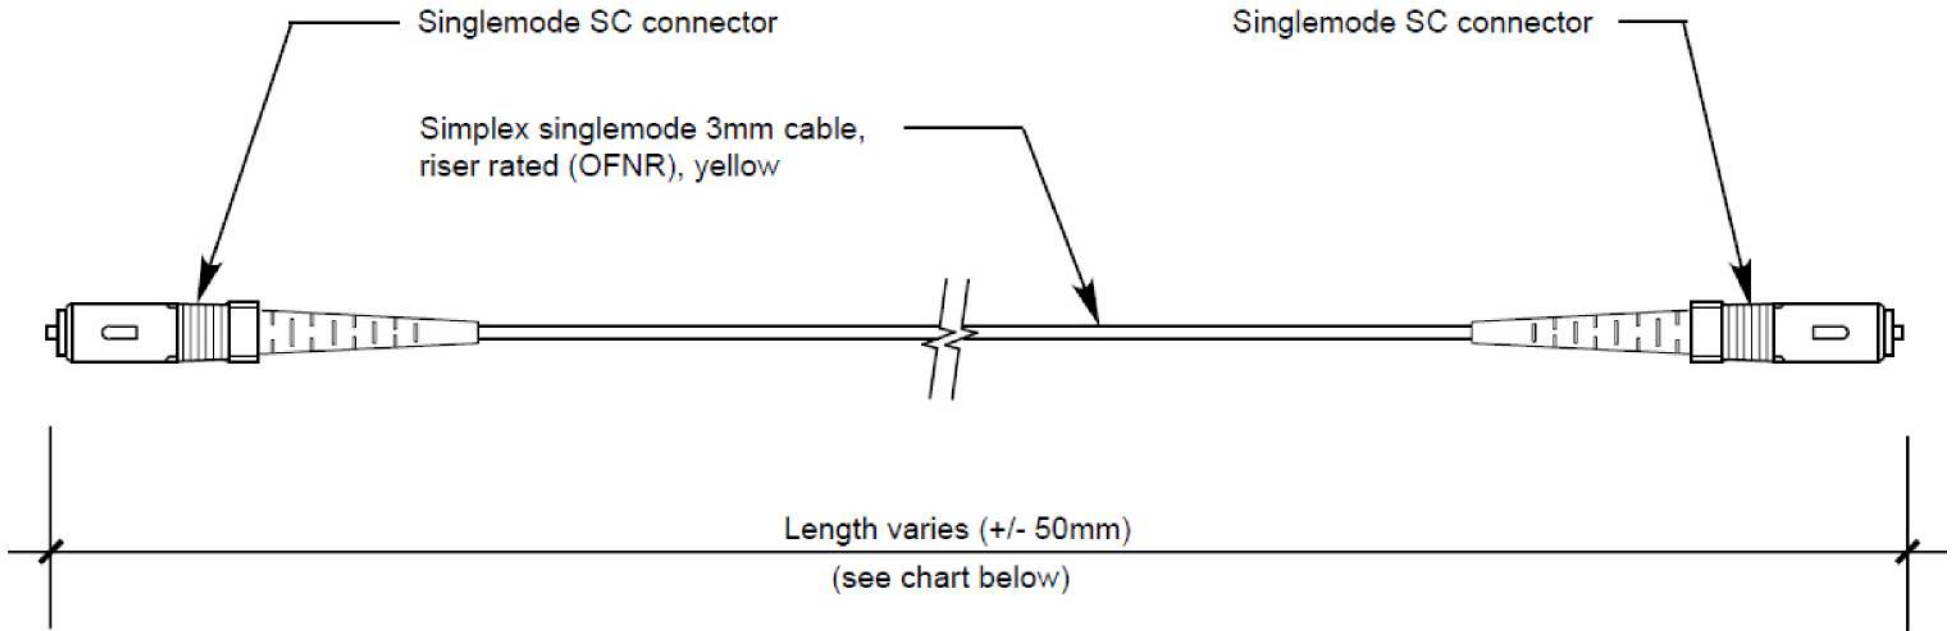

Singlemode Simplex SC to SC Fiber optic Cable Assembly

NOTES:

- 1) Test all (100%) connectors for Insertion Loss (I.L.) and Return Loss (R.L.)
 I.L. to be 0.35dB or better measured with a 1550 nm source
 R.L. to be -55dB or better measured with a 1550 nm source

Type #	Length	Article #
FA1SMSCSC	1 meter	855-34209
FA2SMSCSC	2 meter	855-34222
FA3SMSCSC	3 meter	855-34236

Material ASSEMBLED	Units: millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	GRW	5/28/2016	Article/Type-No	FA_SMSCSC	Scale	1:1
	Dimension without tolerances details to: .XXX = ±.013 .XX = ±.13 .X = ±.3 None = ±.8 < = ±0.5° Dimension Formatted mm/[in]		Approved	KAC	5/28/2016	Title	SINGLEMODE SIMPLEX SC TO SC FIBER CABLE	Project Number	PRP 16-0389
	 North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase		Format	AH	
				16-0389-001-CSU			Sheet	1/1	