



環保物料專用

RoHS compliant

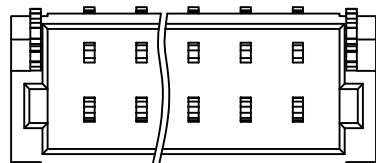

Ordering Information  
CCSH-W10R-XXTR-BK-A




(02 TO 20  
Contacts)

In Tape  
& Reel

10pcs/Bag  
& label

SPECIFICATIONS

Current rating :1A AC,DC  
Voltage rating :50V AC,DC  
Temperature range :−25°C~+85°C  
Contact resistance :20mΩMax  
Insulation resistance :100MΩMin  
Withstanding voltage :500VAC/minute  
Pin Material :Phosphor Bronze  
Finished :Tin-plated  
Housing Material :Nylon-6T,UL94V-0  
Color :Black  
Packaging :In Tape Reel

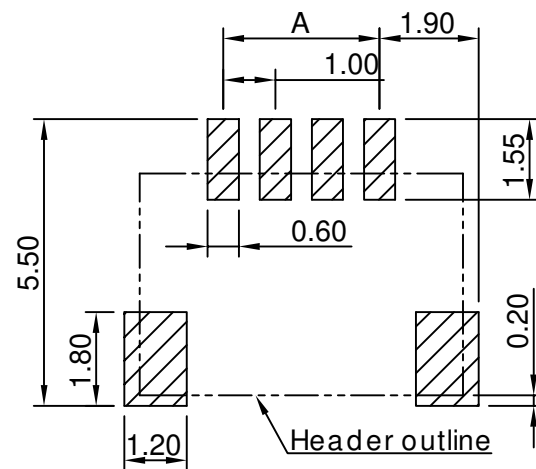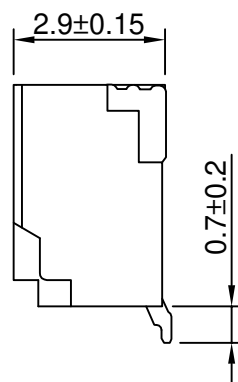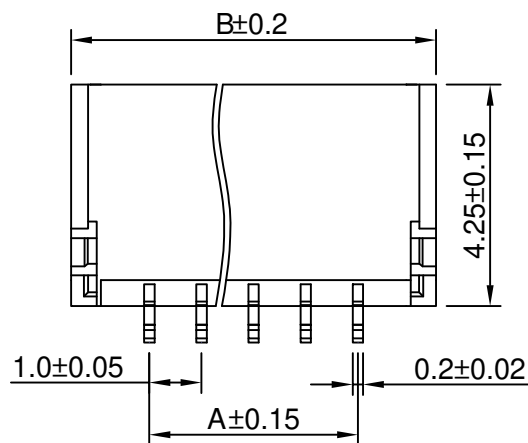

P.C.B Layout

Circuits	Dimensions	
	A	B
02	1.00	4.00
03	2.00	5.00
04	3.00	6.00
05	4.00	7.00
06	5.00	8.00
07	6.00	9.00
08	7.00	10.00
09	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00
17	16.00	19.00
18	17.00	20.00
19	18.00	21.00
20	19.00	22.00



DESCRIPTION(內容):  
1.00MM WAFER 90° SMT TYPE  
REEL PACKAGE

DRAWN(製圖):  
**Tom Liu**

CHECKED(確認):  
**Jack Wu**

APPROVAL(核准):  
**Kane He**

GENERAL TOLERANCE

LINEAR	ANGLES
X: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

REV:

A/1

REV

1

2

3

4

DESCRIPTION

ORIGINAL

DATE

Mar-07-2016

PART NO:  
(料號) CCSH-W10R-XXTR-BK-A

DWG NO(圖號): KWRD160307-016

A4

SCALE(比例):  
1:XX



THIRD ANGLE PROJECTION