


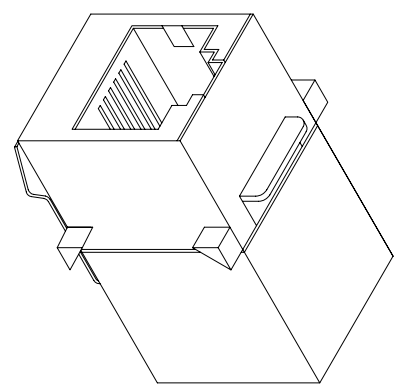
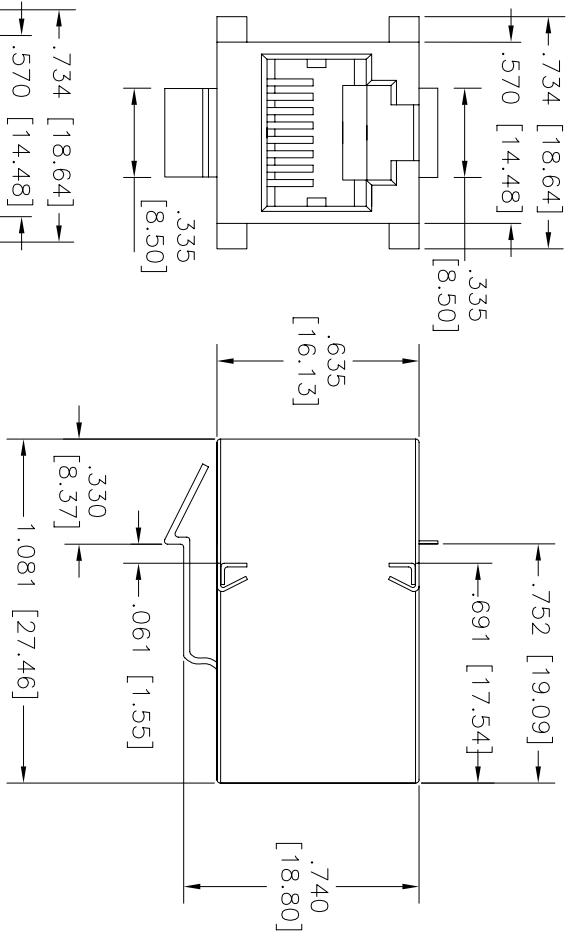


RoHS Compliant

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	11/14/06	KL	
B	added Tol.; plating changed PER ECO 002	01/09/13	KL	

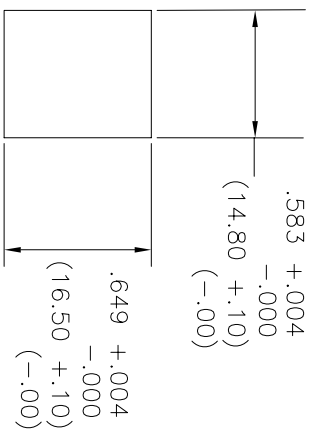

8P6C	TYPE 1
8C	TYPE 2
8Ck	TYPE 3
ITEM	VERSION

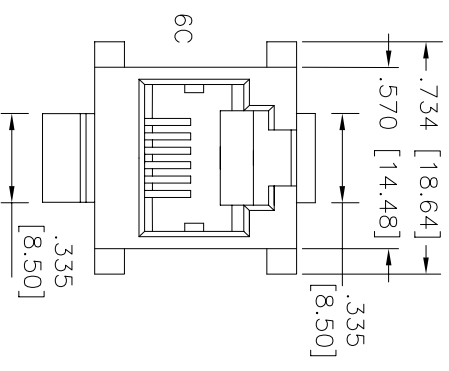

TOLERANCE unit: mm
.XX ±0.25
.XXX ±0.10

M1026K - (Contacts)
Contacts: 8C = 8C8P

UNIT: inch (mm)

CONFIDENTIAL



© Copyright 2006 Regal Electronics, Inc.
This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

REGAL ELECTRONICS INC.
Modular
In-Line Coupler
(Shielded)

DRAWN: Kilm	DATE: 11/14/06	TITLE: Modular In-Line Coupler (Shielded)	SIZE: B	DRAWING NO: M1026KS-8C-MMR	REV: B
CHECKED:	DATE:		SCALE: NONE		
ENGINEER:	DATE:				
APPROVED:	DATE:				
APPROVED:	DATE:				
APPROVED:	DATE:				

ELECTRICAL
CURRENT RATING: 1.5 AMPS
CONTACT RESISTANCE: 20 MILLIOHMS

MECHANICAL
HOUSINGS: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94-V0 RATED, PBT
SPRING WIRE: SQUARE SPRING WIRE, TEMPERED PHOSPHOROUS BRONZE
PLATING: 15 MICRO-INCHES OF GOLD OVER NICKEL
INSERTION/EXTRACTION LIFE: 1000 CYCLES
SHIELDED: STAINLESS STEEL

A
B
C
D

5
4
3
2
1

M1026KS-8C-MMR