

Description: RO, 5dBi, 860-930MHz, NF

PART NUMBER: RO8605NFC

**Series: Radome Omni** 

Pulse*LARSEN* 

#### Features:

- Omnidirectional antenna
- Gain 5dBi
- Polarization Vertical
- Connector N-female
- Length 812.4mm
- Power withstanding 50W
- IP67

## **Applications:**

- 860-960MHz radios
- ISM 868 / 915MHz

All dimensions are in mm / inches

#### Issue:1651

In the effort to improve our products, we reserve the right to make changes judged to be necessary.  $\texttt{CONFIDENTIAL} \ \texttt{AND} \ \texttt{PROPRIETARY} \ \texttt{INFORMATION}$ 

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: RO, 5dBi, 860-930MHz, NF

**Series: Radome Omni** 

PART NUMBER: RO8605NFC

#### **ELECTRICAL SPECIFICATIONS**

Antenna type Collinear dipole array

Frequency 860-930 MHz

Nominal Impedance 50  $\Omega$ 

VSWR 2:1

Gain 5 dBi

Efficiency 65 % Min

HPBW H-Plane 360 °

HPBW E-Plane 22 °

Polarization Vertical

ESD Protection DC Grounded

Power withstanding 50 W

Connector type N-Female





Description: RO, 5dBi, 860-930MHz, NF

Series: Radome Omni

PART NUMBER: RO8605NFC

### **MECHANICAL SPECIFICATIONS**

Plastic radome Pultruded Fiberglass

Color White

Ingress Protection IP67

Weight 275 g

Wind-loading 201.2 kph (125 mph)

Antenna Length 812.4 mm

### **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature

-40 to +85° C









Series: Radome Omni

PART NUMBER: RO8605NFC

### **MECHANICAL DRAWING**

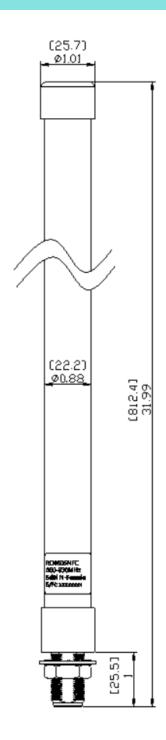

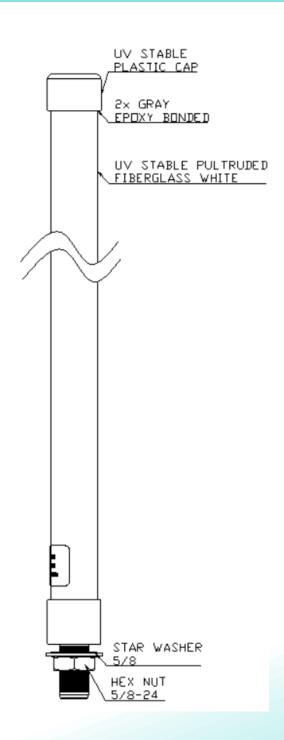






Series: Radome Omni

PART NUMBER: RO8605NFC

### **CHARTS**

#### S11 Parameter

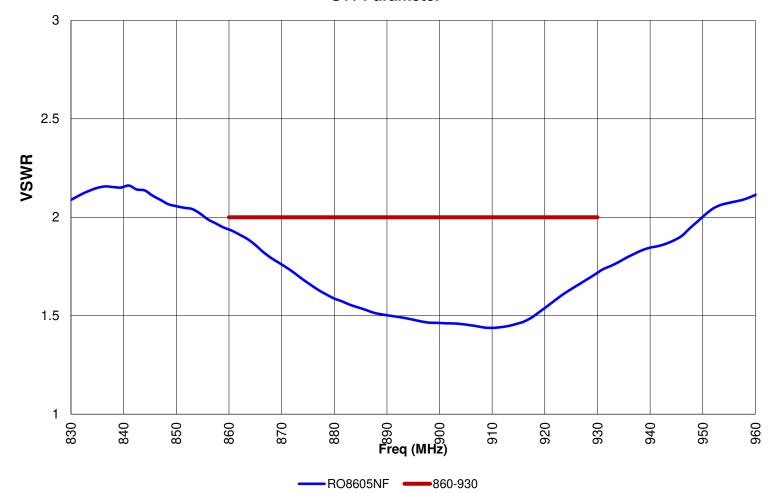








Series: Radome Omni

PART NUMBER: RO8605NFC

### **CHARTS**

#### Peak Gain vs Frequency RO8605NF

Measured at Pulse, USA - Aug 22, 2016

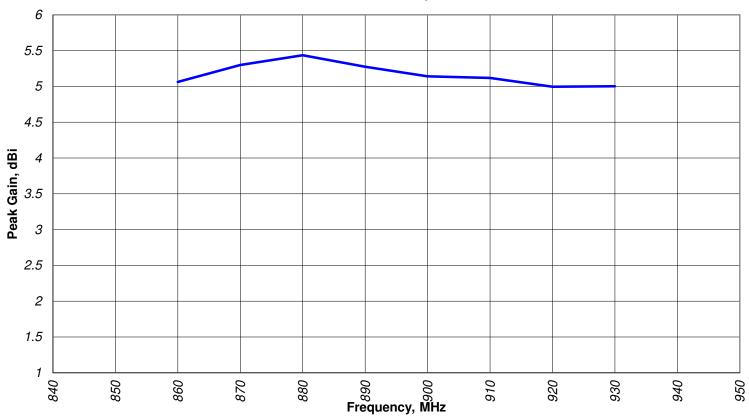

860-930








Series: Radome Omni

PART NUMBER: RO8605NFC

### **CHARTS**

# Efficiency vs Frequency RO8605NF

Measured at Pulse, USA - Aug 22, 2016

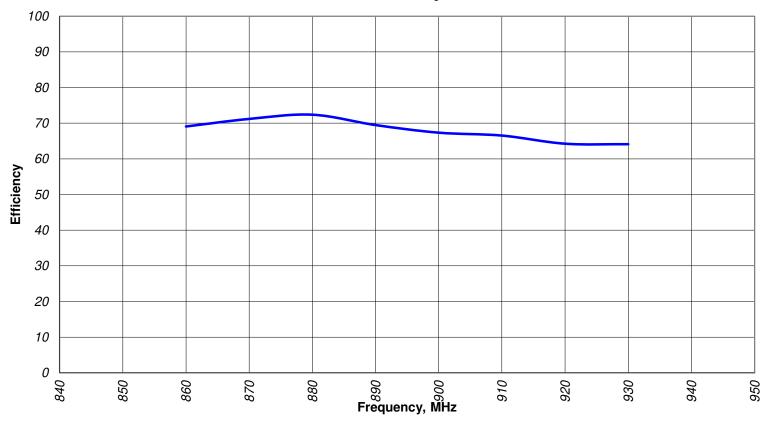

860-930








Series: Radome Omni

PART NUMBER: RO8605NFC

### **CHARTS**

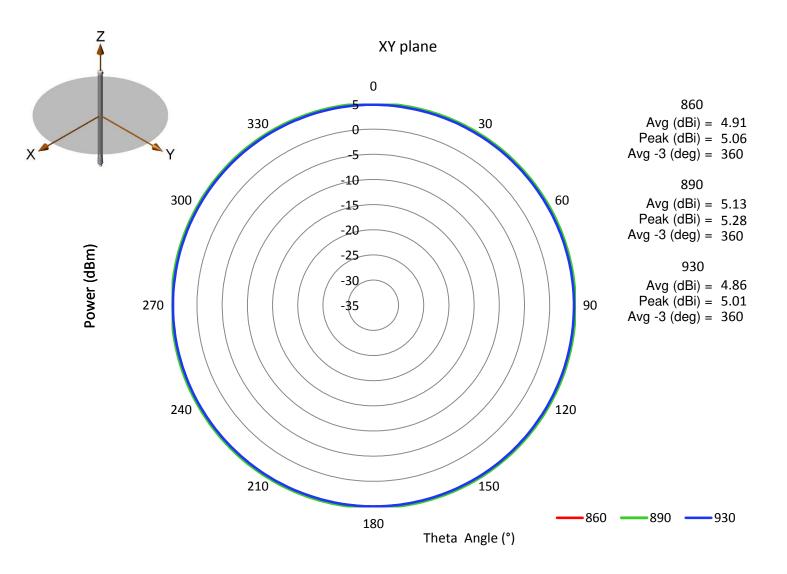






Series: Radome Omni

PART NUMBER: RO8605NFC

### **CHARTS**

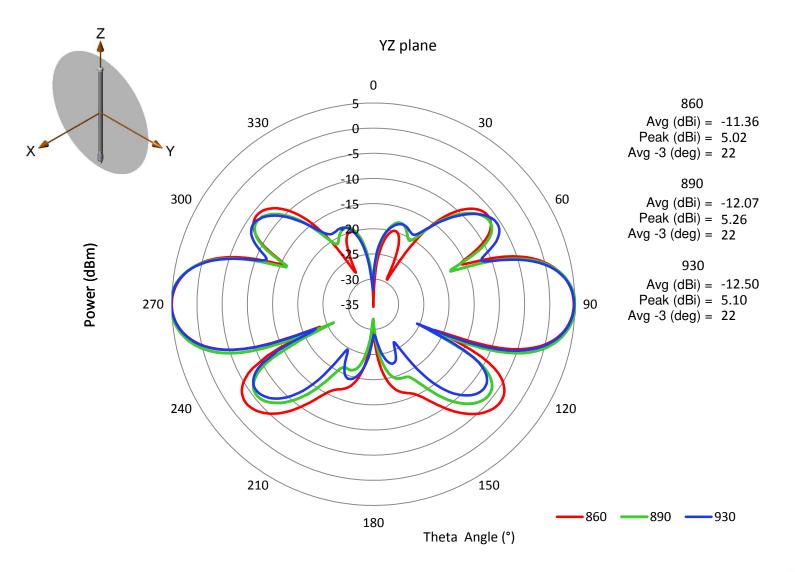



Description: RO, 5dBi, 860-930MHz, NF

**Series: Radome Omni** 

PART NUMBER: RO8605NFC

### **PACKAGING**

Pack each Antenna in PE bag, 40 sets in one carton box with one big PE bag