
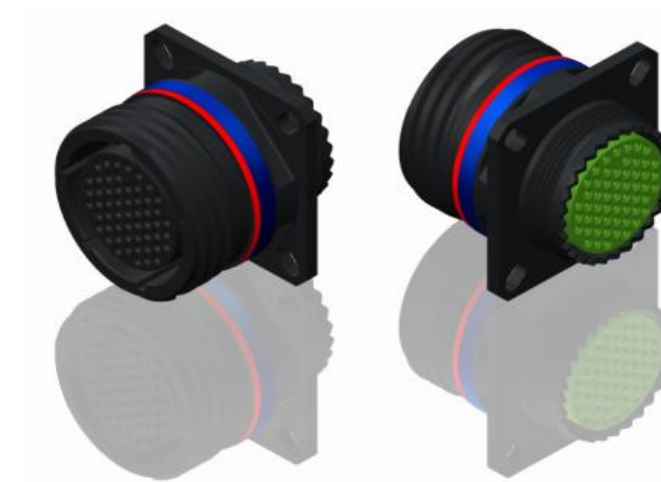


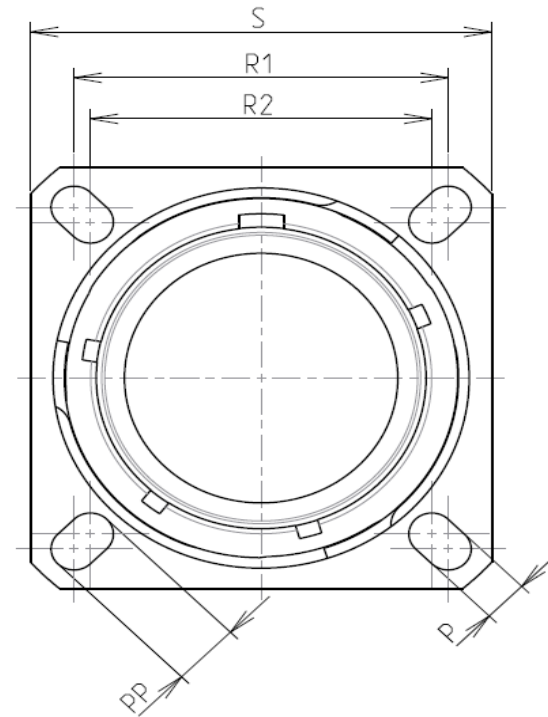

Keying Shown as example

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Composite
- Shell Plating : Without Plating
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered without Souriau contacts
- Temperature Range : -65°C to +175°C
- Salt Spray : 2000 hours
- Mass : 12.3 g ± 10%

| Connector dimension |               |
|---------------------|---------------|
| Dim                 | Nominal       |
| P                   | 3.25±0.2      |
| PP                  | 4.93±0.2      |
| R1                  | 23.01         |
| R2                  | 20.62         |
| S                   | 28.6±0.3      |
| V                   | 20.83+0/-1.25 |
| W                   | 2.1/2.5       |
| Z                   | 31.5 Max      |
| VV THREAD           | M18x1-6g      |


SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

PN: 8D013X35PCL

|              |                                                                                       |                                |                                                                                                                |
|--------------|---------------------------------------------------------------------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------|
| A            | 16-10-2016                                                                            | First Release                  |                                                                                                                |
| ISS          | DATE                                                                                  | Latest modification - by       | MOD N°                                                                                                         |
| Designed By: |                                                                                       | Date:                          | CUSTOMER DRAWING                                                                                               |
| TITLE        |                                                                                       | Composite Receptacle 8D series |                                                                                                                |
| SCALE        |  | General linear<br>Tolerances:  | NPRDS / PROJECT                                                                                                |
| NA           |                                                                                       | ±--                            | 859                                                                                                            |
| SOURIAU      |                                                                                       | WWW.SOURIAU.COM                | This document is the property of<br>SOURIAU<br>it must not be reproduced or<br>communicated without permission |
| FORMAT       | SOURIAU DRG N°<br>8D013X35PCL-C                                                       |                                | SHEET<br>1/2                                                                                                   |


### Contact Layout



| Contacts<br>(Insert arrangement 13-35) |             |             |                     |             |             |
|----------------------------------------|-------------|-------------|---------------------|-------------|-------------|
| Contact position ID                    | Location    |             | Contact position ID | Location    |             |
|                                        | X-axis (mm) | Y-axis (mm) |                     | X-axis (mm) | Y-axis (mm) |
| 1                                      | +045 (1.14) | +197 (5.00) | 12                  | -182 (4.62) | +088 (2.24) |
| 2                                      | +126 (3.20) | +158 (4.01) | 13                  | -126 (3.20) | +158 (4.01) |
| 3                                      | +182 (4.62) | +088 (2.24) | 14                  | -045 (1.14) | +197 (5.00) |
| 4                                      | +203 (5.16) | +000 (0.00) | 15                  | +045 (1.14) | +107 (2.72) |
| 5                                      | +182 (4.62) | -088 (2.24) | 16                  | +117 (2.97) | +026 (0.66) |
| 6                                      | +126 (3.20) | -158 (4.01) | 17                  | +093 (2.36) | -075 (1.91) |
| 7                                      | +045 (1.14) | -197 (5.00) | 18                  | +000 (0.00) | -120 (3.05) |
| 8                                      | -045 (1.14) | -197 (5.00) | 19                  | -093 (2.36) | -075 (1.91) |
| 9                                      | -126 (3.20) | -158 (4.01) | 20                  | -117 (2.97) | +026 (0.66) |
| 10                                     | -182 (4.62) | -088 (2.24) | 21                  | -045 (1.14) | +107 (2.72) |
| 11                                     | -203 (5.16) | +000 (0.00) | 22                  | +000 (0.00) | -030 (0.76) |

| (Applicable to MIL-DTL-38999 only) |                 |                    |               |                |                  |            |
|------------------------------------|-----------------|--------------------|---------------|----------------|------------------|------------|
| Shell size                         | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location | Supersedes |
| 13                                 | -35             | 22                 | 22D           | M              | All              | MS27527-35 |

### Panel Cutout

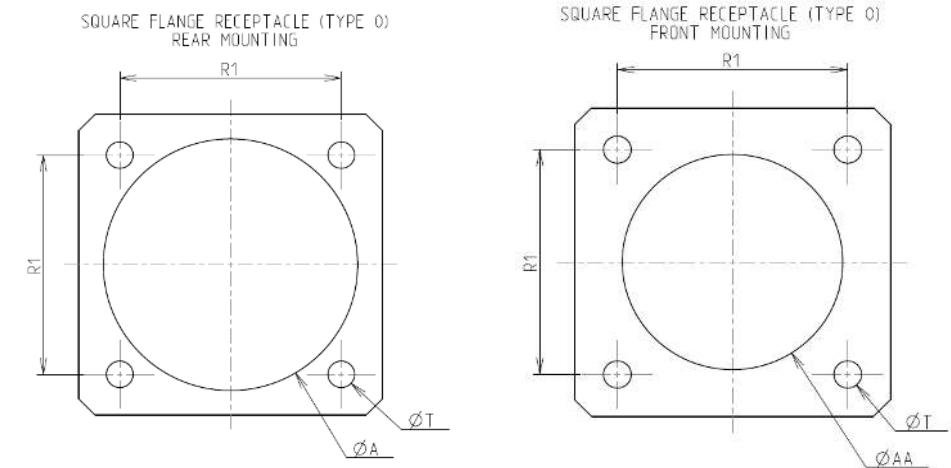


| Dim | Nominal    |
|-----|------------|
| ØA  | 23.42 min  |
| ØAA | 19.05 min  |
| R1  | 23.01      |
| ØT  | 3.25 ±0.13 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

PN: 8D013X35PCL

|              |                                                                                       |                                |                  |                                                                                                                |
|--------------|---------------------------------------------------------------------------------------|--------------------------------|------------------|----------------------------------------------------------------------------------------------------------------|
| A            | 16-10-2016                                                                            | First Release                  |                  |                                                                                                                |
| ISS          | DATE                                                                                  | Latest modification - by       |                  | MOD N°                                                                                                         |
| Designed By: |                                                                                       | Date:                          | CUSTOMER DRAWING |                                                                                                                |
| TITLE        |                                                                                       | Composite Receptacle 8D series |                  |                                                                                                                |
| SCALE        |  | General linear<br>Tolerances:  | NPRDS / PROJECT  |                                                                                                                |
| NA           |                                                                                       | ±--                            | 859              |                                                                                                                |
| SOURIAU      |                                                                                       | WWW.SOURIAU.COM                |                  | This document is the property of<br>SOURIAU<br>it must not be reproduced or<br>communicated without permission |
| FORMAT       | SOURIAU DRG N°<br>8D013X35PCL-C                                                       |                                |                  | SHEET<br>2/2                                                                                                   |