CMPDM203NH

SURFACE MOUNT
N-CHANNEL
ENHANCEMENT-MODE
SILICON MOSFET





www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPDM203NH is a High Current N-Channel Enhancement-mode Silicon MOSFET, manufactured by the N-Channel DMOS Process, and is designed for high speed pulsed amplifier and driver applications. This MOSFET offers High Current, Low r_{DS(ON)}, Low Threshold Voltage, and Low Leakage Current.

MARKING CODE: 203C

APPLICATIONS:

- Load/Power switches
- Power supply converter circuits
- Battery powered portable equipment

FEATURES:

- Low $r_{\mbox{DS(ON)}} \, (0.07 \Omega \mbox{ MAX @ V}_{\mbox{GS}} = 2.5 \mbox{V})$
- High current (ID=3.2A)
- Logic level compatibility

MAXIMUM RATINGS: (T _A =25°C)	SYMBOL		UNITS
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	12	V
Continuous Drain Current (Steady State)	ID	3.2	Α
Maximum Pulsed Drain Current, tp=10μs	I_{DM}	12.8	Α
Power Dissipation	P_{D}	350	mW
Operating and Storage Junction Temperature	T _J , T _{stg}	-55 to +150	°C
Thermal Resistance	$\Theta_{\sf JA}$	357	°C/W

ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)

0)////	TEGT COMPLETIONS		T)/D	8447	
SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
IGSSF, IGSSR	V_{GS} =12V, V_{DS} =0			10	μA
l _{DSS}	V_{DS} =20V, V_{GS} =0			1.0	μΑ
BV _{DSS}	$V_{GS}=0, I_{D}=250\mu A$	20			V
V _{GS(th)}	$V_{GS}=V_{DS}$, $I_{D}=250\mu A$	0.6		1.2	V
rDS(ON)	V_{GS} =4.5V, I_{D} =1.6A		0.033	0.05	Ω
rDS(ON)	V_{GS} =2.5V, I_{D} =1.6A		0.046	0.07	Ω
9FS	V_{DS} =5.0V, I_{D} =3.2A		10.5		S
C _{rss}	V_{DS} =10V, V_{GS} =0, f=1.0MHz		44		pF
C _{iss}	V_{DS} =10V, V_{GS} =0, f=1.0MHz		395		pF
Coss	V_{DS} =10V, V_{GS} =0, f=1.0MHz		97		pF
Q _{g(tot)}	V_{DD} =10V, V_{GS} =4.5V, I_{D} =3.2A	١	6.8	10	nC
Q _{gs}	V_{DD} =10V, V_{GS} =4.5V, I_{D} =3.2A	1	8.0	1.2	nC
Q _{gd}	V_{DD} =10V, V_{GS} =4.5V, I_{D} =3.2A	1	0.9	1.1	nC
ton	V_{DD} =10V, I_D =3.2A, R_G =10 Ω		6.0		ns
t _{off}	V_{DD} =10V, I_{D} =3.2A, R_{G} =10 Ω		22.8		ns


R0 (20-October 2010)

CMPDM203NH


SURFACE MOUNT N-CHANNEL ENHANCEMENT-MODE SILICON MOSFET



SOT-23F CASE - MECHANICAL OUTLINE

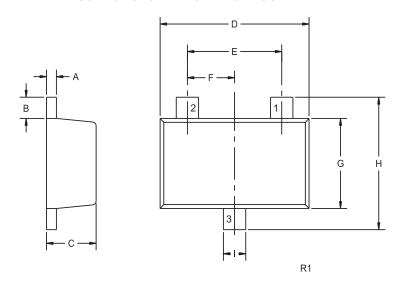

PIN CONFIGURATION



DIMENSIONS				
	INCHES		MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX
Α	0.004	0.008	0.10	0.20
В	0.012	0.020	0.30	0.50
С	0.031	0.039	0.80	1.00
D	0.110	0.118	2.80	3.00
E	0.075		1.90	
F	0.037		0.95	
G	0.059	0.067	1.50	1.70
Н	0.091	0.098	2.30	2.50
	0.014	0.018	0.35	0.45
SOT-23F (REV: R1)				

LEAD CODE:

- 1) Gate
- 2) Source
- 3) Drain

MARKING CODE: 203C

R0 (20-October 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- · Environmental regulation compliance
- · Customer specific screening
- · Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- · Package details
- Application notes
- · Application and design sample kits
- · Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110 Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

www.centralsemi.com (001)



Product End of Life Notification

PDN ID:	PDN01070 Rev:001
Notification Date:	4/05/18
Last Buy Date:	N/A
Last Shipment Date	N/A

Please be advised that Central Semiconductor must immediately discontinue the product(s) listed in the attached PDN notice. We are unable to accept any further orders for these products <u>unless</u> we have available inventory on hand.

You may have purchased one or more of the products listed. Please do not hesitate to contact your local Central Semiconductor sales representative with any questions or needs you may have. Central regrets any inconvenience this may cause.

Sincerely,

Central Semiconductor Corp.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

CCC785 REV 002



Product End of Life Notification

PDN ID:	PDN01070 Rev:001
Notification Date:	4/05/18
Last Buy Date:	N/A
Last Shipment Date	N/A

Summary: The following MOSFET devices manufactured in the SOT-23F package have been discontinued and are now classified as End of Life (EOL). Rev:001 to PDN#01070, originally issued on March, 21, 2018, is being issued to remove part #s CEN1232 and CEN1233 due to market demand; these devices are once again active.

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

Central Part Number	Replacement	
CMPDM202PH BK	N/A	
CMPDM202PH TR	N/A	
CMPDM203NH BK	N/A	
CMPDM203NH TR	N/A	
CMPDM302PH BK	N/A	
CMPDM302PH TR	N/A	
CMPDM303NH BK	N/A	
CMPDM303NH TR	N/A	

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centralsemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

CCC785 REV 002