


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR
 BOOT: FLEXIBLE PVC. AVAILABLE IN TEN COLORS
 CONTACT: STEEL
2. P/N: 9260COLOR
 HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 FRAME: NICKEL PLATED BRASS.
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-600/COLOR
 18AWG TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
4. PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
 HANDS FREE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

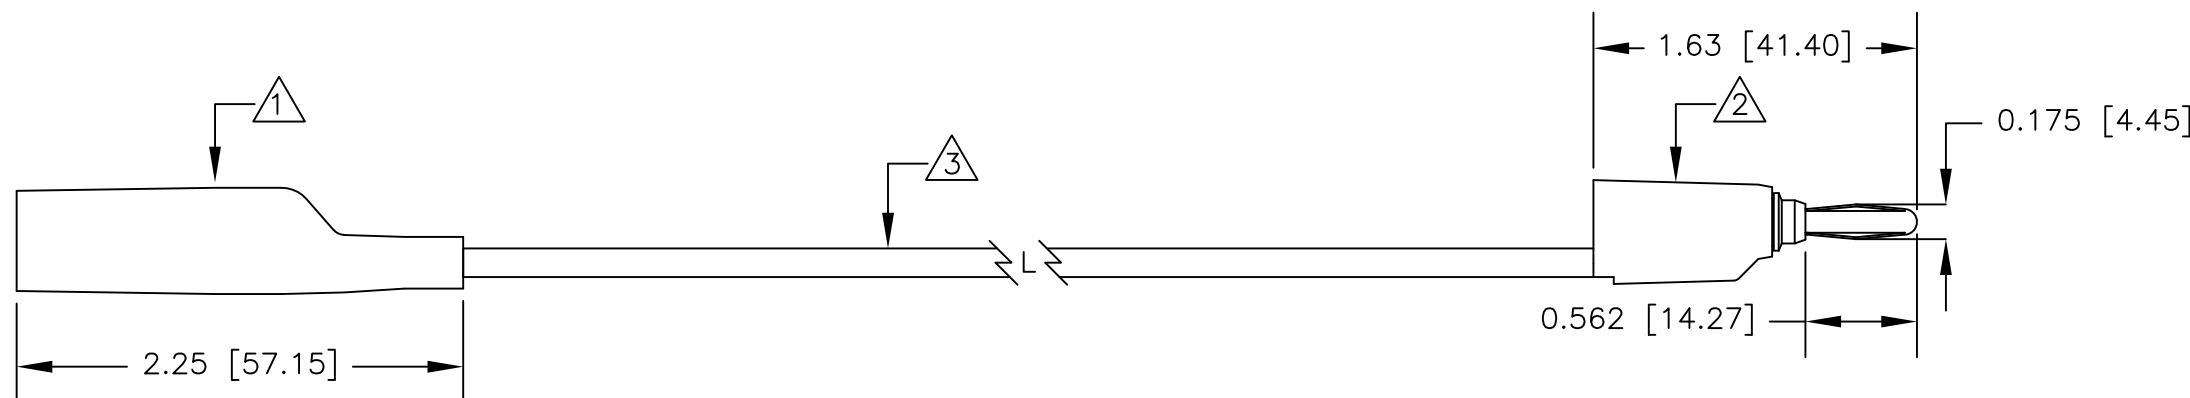

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	5/13	
			FINISH SEE NOTE.	APPROVED BY		
NEXT ASSY	USED ON				DESCRIPTION STD ALLIGATOR CLIP (9274) TO STK BAN PLUG (9260)	
APPLICATION		DO NOT SCALE DRAWING	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			B	08505	681	
			SCALE	1:1		SHEET 1 OF 1