
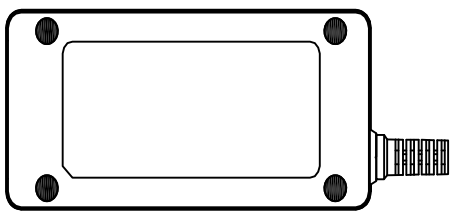
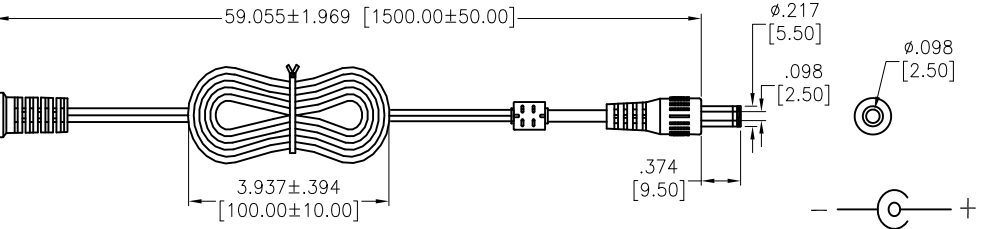
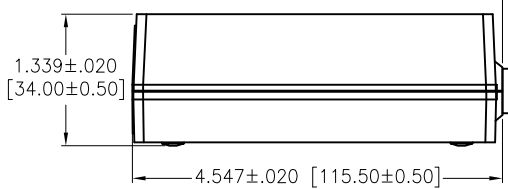
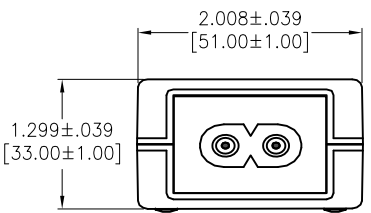


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/21	
A		ADDED TOLERANCE	6/10/21	WX/AC
B		UPDATE LABEL	7/19/21	WX/AC

APPROVED: _____
 DATE: _____ TITLE: _____

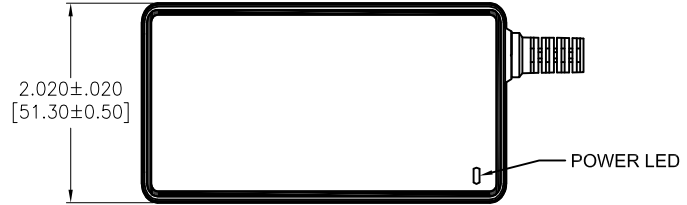


SPECIFICATIONS:

Connector
 P1: Power Adapter, IEC Female C5
 P2: DC Plug, W/Strain Relief, 5.5*2.5*9.5mm
 Overmold Color: Black PVC-45P
 CABLE:
 UL2468: 22AWG*2C 80°C, Jacket Color: Black
 Electrical:
 Input:
 Voltage: 100Vac to 240Vac
 Current: 1.5A Max. @ 100Vac input & max load
 Frequency: 50Hz / 60Hz
 Output:
 Voltage: 48V
 Current: 1.35A max.
 Load Regulation: ±5%
 Line Regulation: ±3%

Line Load Regulation-Output Rate: 48V, 1.35A
 Insulation Resistance: 100 Mohms min @ 500VDC
 Dielectric withstanding voltage (Hi-pot): 3,000V AC For 1 Minute
 Leakage Current: 0.25mA max. @ 240V AC/50Hz
 Temperature Rating:
 Operating Temperature: 0°C to +45°C
 Storage Temperature: -25°C to +85°C

Environmental:
 Lead free, RoHS compliant.

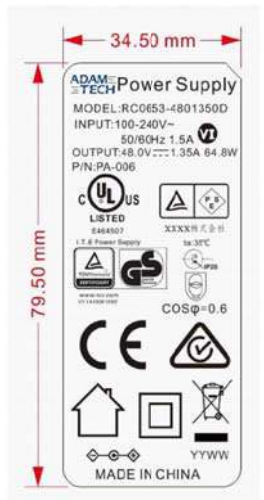

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		
MM	0~10	± 0.05
	10~50	± 0.10
	10~50	± 0.10
	150~300	± 0.20
	300~	± 0.30

APPROVALS		DATE
DRAWN	WX	3/19/21
CHECKED	AC	3/19/21
APPROVED		

ADAM-TECH 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE: POWER ADAPTER, IEC C7 TO 2.5 X 5.5 X 9.5
 DC PLUG, 48 VOLT, 1.35 AMP, UL2468 22AWG

SIZE X	PART NO. PA-006	REV. B
-----------	--------------------	-----------

REF: _____ SCALE: NTS SHEET 1 OF 1