



**PARTICLES
PLUS®**

9301 and 9501 Remote Airborne Particle Counters 0.1 CFM (2.83 LPM)




The 9301 and 9501 particle counters provide a range of particle size measurement from 0.3 to 10.0 μm at a flow rate of 0.1 CFM (2.83 LPM). These sensors allow for efficient particle counting with specifications that exceed the ISO 21501-4 and JIS B9921 calibration standards.

These sensors have 6 user-selectable particle size channels (up to 30 channels optional) and are equipped with an integral critical orifice and flow sensor to provide a stable flow rate from an external vacuum source. Integration into a building automation or facility monitoring system is easy via isolated RS-485 Modbus communication.

9301 and 9501: Features and Benefits

- 9301: Measures 0.3 μm to 25 μm
- 9501: Measures 0.5 μm to 25 μm
- 0.1 CFM (2.83 LPM) flow rate
- Long life laser diode technology
- Measures up to 30 channels of simultaneous data
- Particle concentrations up to 10,000,000 Particles/ft³ @ 10% coincidence loss
- Internal critical orifice
- User-selectable channel sizes
- Stores up to 65,000 sample records for on-board data redundancy
- (Optional) temperature and relative humidity probe available
- Connect using Modbus RTU/ASCII over isolated RS-485
- Complies with ISO 21501-4 and JIS B9921 standards
- Easy to clean and wipe down with minimal particle traps
- Versatile mounting options
- Alarm light
- LED Indicators
- Seamless integration into a facility monitoring system
- Lightweight stainless steel enclosure
- 2 year warranty. Extended warranties available.

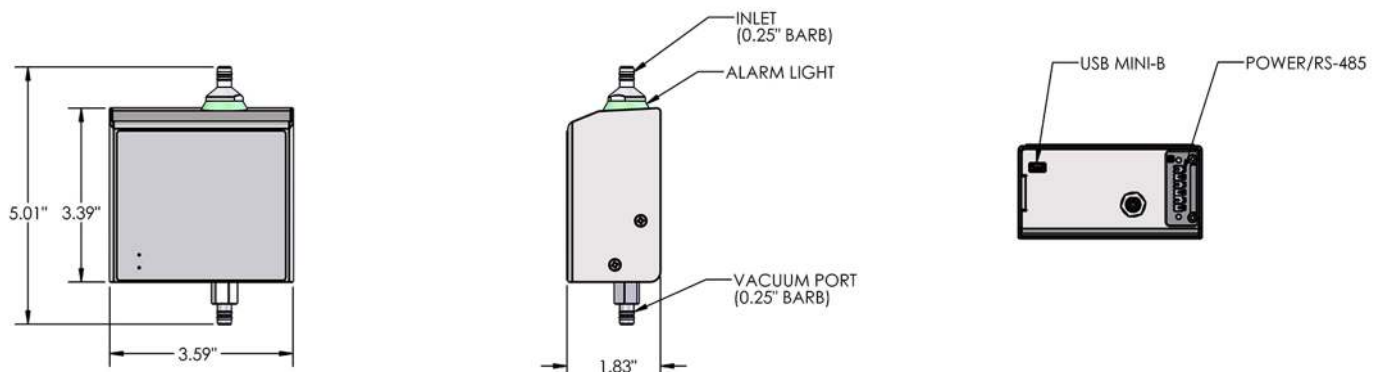



Specifications

Model	9301	9501
Size Range	0.3 μm to 25 μm	0.5 μm to 25 μm
Size Channels	Factory calibrated at 0.3, 0.5, 1.0, 2.5, 5.0, 10.0 μm	Factory calibrated at 0.5, 0.7, 1.0, 2.5, 5.0, 10.0 μm
Number of Channels	6 channels (up to 30 optional)	6 channels (up to 30 optional)
Counting Efficiency	50% @ 0.3 μm ; 100% for particles > 0.45 μm per JIS	50% @ 0.5 μm ; 100% for particles > 0.75 μm per JIS
Flow Rate	0.1 CFM (2.83 LPM)	
Concentration Limits	10,000,000 particles/ft ³ @ 10% coincidence (per ISO 21501-4), 20,000,000 particles/ft ³ @ 10% coincidence (as tested and validated ¹)	
Light Source	Long life laser diode	
Zero Count	< 1 count / 60 minutes (< 1 particles /6 ft ³)	
Alarms	Channel alarms on Raw counts, concentrations or mass (alarms on environmental sensors optional)	
Calibration	NIST traceable	
Vacuum Requirements	External vacuum > 15" (38.1cm) of Hg	
Airflow	Internally monitored	
Configuration/Download	USB mini-B	
Alarm	Alarm LED ring	
Communication Modes	MODBUS™ RTU or ASCII outputs (over isolated RS-485)	
Environmental Sensor	(Optional) Temp and RH probe 32° to 122°F (0° to 50°C) \pm 1°F (0.5°C), 15-90% \pm 2% relative humidity	
Standards	ISO 21501-4 and JIS B9921	
Instrument Calibration	Recommended minimum once per year	
External Surface	Stainless steel	
Dimensions (L x W x H)	3.59" x 1.83" x 5.01" (9.1 cm x 4.6 cm x 12.7 cm) including probes and connectors	
Weight	1.08 lb. (494 grams)	
Accessories	Operating manual on USB flash drive, isokinetic probe, power supply and cable	
Optional Accessories	Printed manual barb fittings, mounting bracket and sample tubing, IMS-RT monitoring system	
Buffer Memory	65,000 sample records (rotating buffer) including particle count data and environmental data	
Sample Time	1 second to 99 hours	
Power	9 - 24 VDC (< 1.5 watts)	
Operating Conditions	41° to 104°F (5° to 40°C) / 20% to 95% non-condensing	
Storage Conditions	32° to 122°F (0° to 50°C) / Up to 98% non-condensing	
Warranty	2 year limited warranty. Extended warranties available.	

1- Validated by independent analysis see paper available at www.particlesplus.com/aac2022_paper

PAT. <https://particlepatents.com/> Additional Patents Pending.
 Particles Plus, Inc. reserves the right to change specifications without notice.
 Contact hello@particlesplus.com or your local distributor for more details.
 Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
 ©2022 Particles Plus, Inc. All rights reserved.

REV 20221208-9301/9501



31 Tosca Drive
 Stoughton, MA 02072 U.S.A.
 +1-781-341-6898
www.particlesplus.com