

Ratings

Voltage: 60 V
 Current: 1 A
 Waterproof: IP 67

Operating Temperature Range

-40 ~ 105 °C

Materials

- ① Insulator: Nylon 66 + 30% glass fiber, black
- ② Pin: brass, gold-flashing
- ③ Shell: brass, nickel plated

Electrical Requirements

Dielectric strength: 1 min @ 500 Vac
 Insulation resistance: 10⁸ Ω min
 Contact resistance: 10 mΩ or less

Mechanical Requirements


Insertion force: 0.82 kgf max
 Withdrawal force: 0.62 kgf max
 Life cycle: 500 mating cycles

Environmental Requirements

Cold test: -25 °C for 2 hours without deformation
 Heat test: 85 °C for 16 hours while maintaining minimum 10⁸ Ω insulation resistance

Assembly info

Wire gauge: 26 AWG max (Ø0.55 mm)

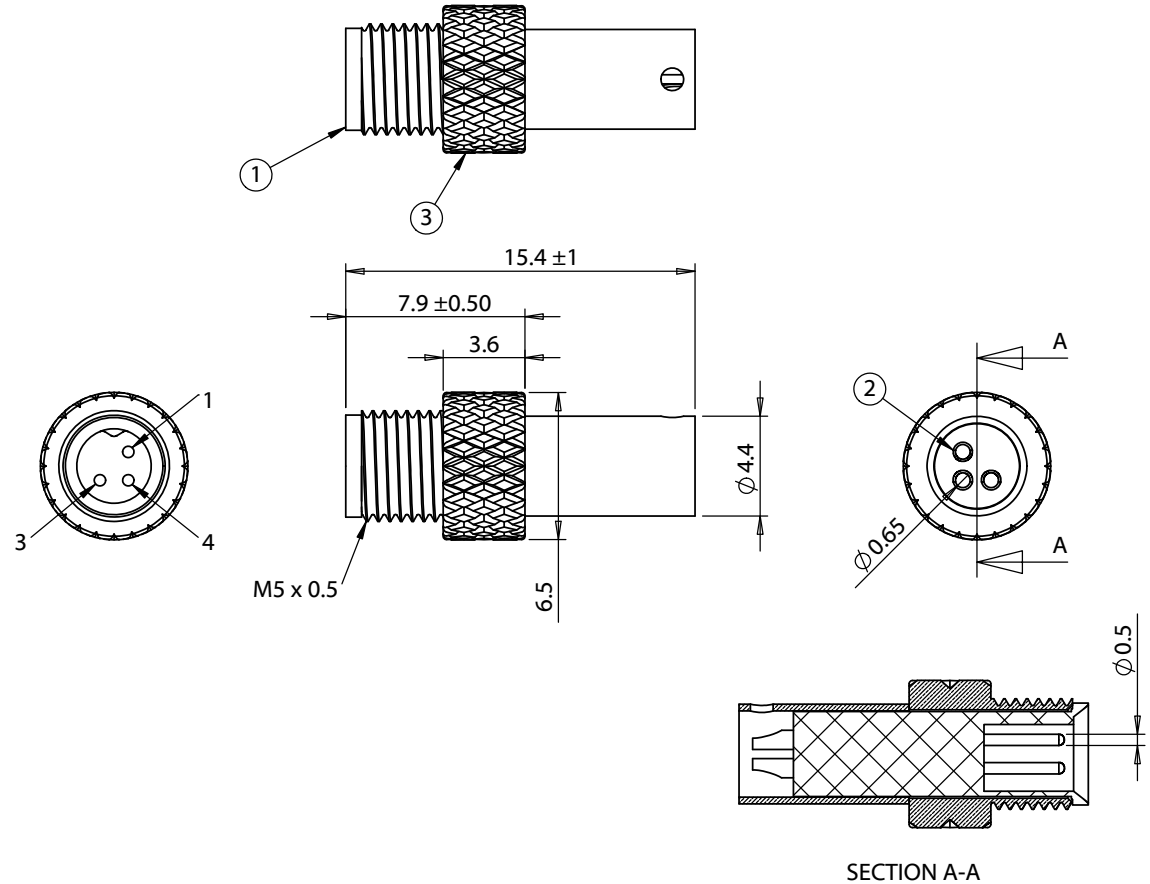

Revision:	Date:	Description:
A	1/11/21	Initial release

Prepared: AG <small>Digitally signed by AG Date: 2021.01.11 11:59:09 -08'00'</small>
Verified: AW <small>Digitally signed by AW Date: 2021.01.15 11:03:07 -08'00'</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.1 mm

Notes: RoHS compliant
Function test: no open, no short circuit, no intermittent
Description: Connector, 3 pin M5 plug, 5xL15.4mm, gold plated, molding style, solder cup, IP67, shielded

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A	Part number: 50-00670
Scale: 3:1	Sheet 1 of 1