



## Industrial Quad-band 3G WCDMA Modem



GTM-203M-3GWA




Dimensions

The GTM-203M-3GWA is an industrial Quad-band 3G and Quad-band GSM modem with RS-232 and USB interfaces that work at frequencies of WCDMA 850/900/1900/2100 MHz and GSM 850 MHz, EGSM 900 MHz, DCS 1800 MHz , PCS 1900 MHz. The modems utilize the 3G or GPRS network to transfer data. The features of the GTM-203M-3GWA allow a variety of PLC and PC applications to take advantage of SMS and 3G or GPRS connectivity.

### Features

- Support Quad-band WCDMA 850/900/1900/2100 MHz
- Support Quad-band GSM 850/900/1800/1900 MHz
- Designed for WCDMA/GPRS Data, SMS and Voice Applications
- Supports TCP Server, TCP Client, UDP Client Connection from 3G or GPRS
- Supports Standard AT Commands
- Includes a Digital Input Channel to reset the System
- LED Indicators for 3G/GSM and Power Indication
- High reliability in harsh environments
- The RS-232 Port supports 9600 to 115200 bps
- The USB supports USB2.0 high speed
- DIN-Rail mountable

### Application

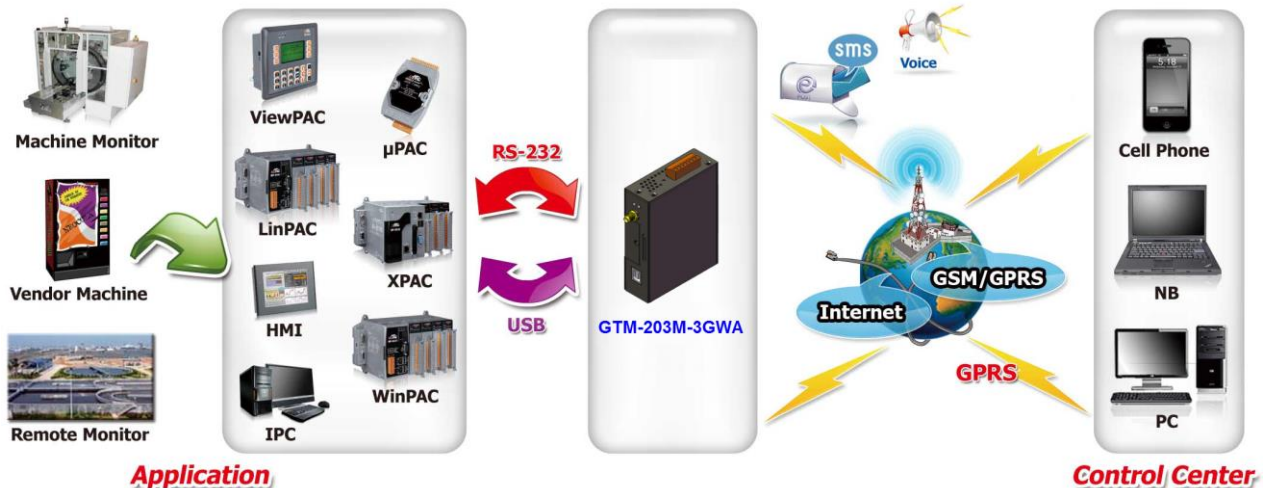



## Hardware Specifications

Item	GTM-203M-3GWA
<b>3G System</b>	
Frequency Band	850/900/1900/2100 MHz
<b>GSM / GPRS System</b>	
Frequency Band	850/900/1800/1900 MHz
GPRS connectivity	GPRS class 12; GPRS station class B
CSD	GSM max. 9.6 kb/s UMTS max. 64 kb/s
Coding Schemes	CS 1, CS 2, CS 3, CS 4
<b>SMS</b>	
SMS	MT, MO, CB, Text and PDU mode
<b>Comm. Interface</b>	
COM ports	TxD, RxD, GND
COM Port Baud Rate	9600 bps ~ 115200 bps
USB	USB 2.0 (high speed)
USB Driver support	Windows XP/Vista/7/8/Linux
<b>LED Indicators</b>	
Power	Red
3G/GSM	Green
<b>Power</b>	
Protection	Power reverse polarity protection
Frame Ground Protection	ESD, Surge, EFT, Hi-Pot
Required Supply Voltage	+10 V <sub>DC</sub> ~ +30 V <sub>DC</sub>
Rated Current	30 ~ 15 mA / 10 ~ 30 V <sub>DC</sub>
<b>Reset Input</b>	
Input Type	Isolated, 3750 V <sub>rms</sub>
On Voltage Level	+3.5 V <sub>DC</sub> ~ +30V <sub>DC</sub>
Off Voltage Level	+1 V <sub>DC</sub> max.
Input Impedance	3 kΩ, 0.25W
<b>Mechanical</b>	
Casing	Metal
Dimensions (W x L x H)	28 mm x 79.4 mm x 100 mm
Installation	DIN-Rail
<b>Environment</b>	
Operation Temp.	-25°C to 70°C
Storage Temp.	-40°C to 80°C
Humidity	5~95% non-condensing

## Ordering Information

<b>GTM-203M-3GWA CR</b>	Industrial Quad-band 3G WCDMA Modem (RoHS)
-------------------------	--

## Option Accessories

<b>GTM-203M-A CR</b>	Audio Module (RoHS)
<b>ANT-421-01</b>	3 m External GPRS/GSM Antenna