

# EKI-7712E-4F

# EKI-7712E-4FI

## 8FE+4SFP Port Gigabit Managed Redundant Industrial Switch



### Features

- 8 Fast Ethernet ports + 4 SFP ports
- SFP socket for Easy and Flexible Fiber Expansion
- Redundancy: X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- IXM function enables fast deployment
- Security: 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, Standard MIB, Private MIB
- NEMA TS2 for Traffic Control
- EN50121-4 approval for Railway trackside deployment
- -40 ~ 75 °C wide-range operating temperature (EKI-7712E-4FI)
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output
- Support Security Pack to against internal and external cyber threats

### Introduction

EKI-7712E-4F/4FI provides abundant ports to connect to many devices with 8 Fast Ethernet ports and 4 SFP (mini-GBIC) ports. It is embedded with Advantech's IXM function for fast deployment, which can dramatically save engineers time and cost. The EKI-7712E series also supports NMS to help IT managers with networking maintenance and failure prevention. Finally, the EKI-7712E series is equipped with X-Ring Pro which can achieve ultra high-speed recovery times of less than 20 ms to ensure network stability. The switch also features a wide -40 to 75 °C operating temperature (EKI-7712G-4FI) and NEMA TS2 rating, making the switch an ideal solution for use in traffic applications. EKI-7712E-4F/4FI has successfully passed the EN50121-4 European railway standard requirements for emissions and railway platform and trackside deployment.

### Specifications

#### Interface

- **I/O Port** 8 x 10/100Base-T/TX RJ-45  
4 x SFP (mini-GBIC) port
- **Console port** RS-232 (RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

#### Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")

#### LED Display

- **System LED** PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED** Link / Speed / Activity

#### Environment

- **Operating Temperature** -40 ~ 75 °C (-40 ~ 167 °F) (7712E-4FI)  
-10 ~ 60 °C (-40 ~ 140 °F) (7712E-4F)
- **Storage Temperature** -40 ~ 85 °C
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

#### Power

- **Power Consumption** 12.1W @ 48V<sub>DC</sub> (System)
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual power input
- **Fault Output** 1 Relay Output

#### Certification


- **EMI** CE, FCC Class A
  - **Safety** UL61010-2-201  
IEC60950\*
  - **EMC** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8  
EN50121-4\*
  - **Shock** IEC 60068-2-27
  - **Freefall** IEC 60068-2-32
  - **Vibration** IEC 60068-2-6
  - **Traffic control** NEMA TS2\*
- \*= Compliant

#### L2 Features

- **L2 MAC Address** 8K
- **Jumbo Frame** 9216 Bytes
- **VLAN Group** 256 (VLAN ID 1 ~ 4094)
- **VLAN Arrange** Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- **Port Mirroring** Per port, Multi-source port,
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms

**Dimensions**

Unit: mm [inch]

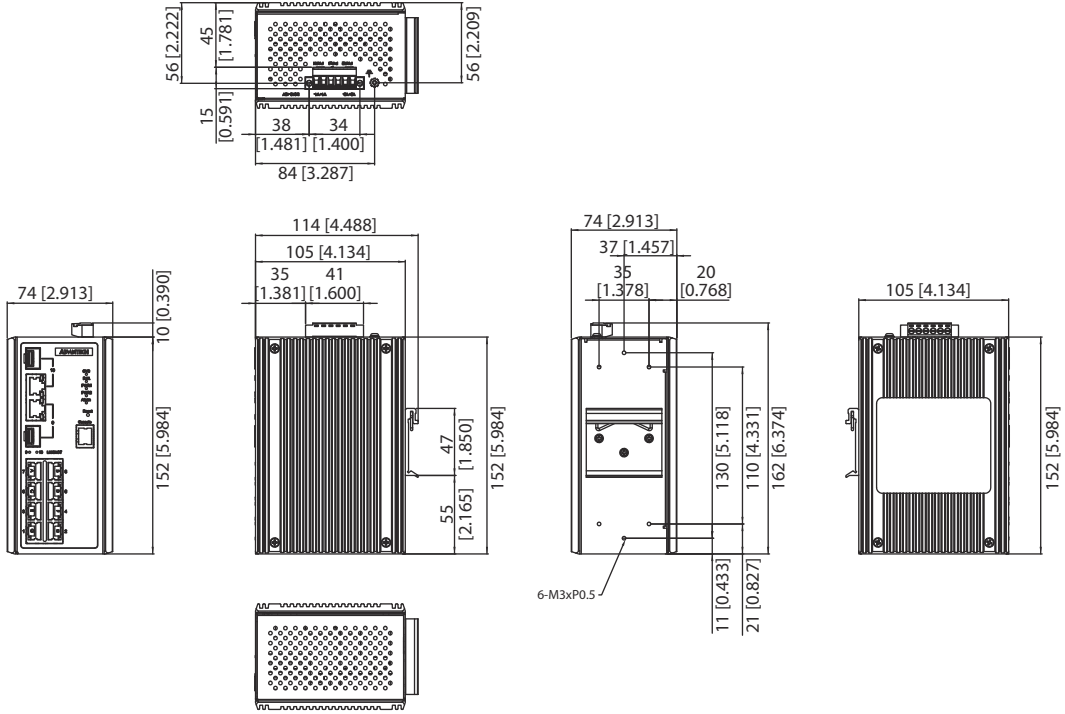

**Panel Cut-out Dimensions: 105 (4.137) x 152 (5.984) x 74 (2.91)**

**QoS**

- **Priority Queue** WRR (Weighted Round Robin), SP (Strict Scheduling)
- **Scheduling** Priority Hybrid Priority
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate Limit, Egress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

**Security**

- **Port Security** Static, Dynamic IP Source Guard, ARP Spoofing Prevention, Access Control List, DHCP Snooping,
- **Authentication** 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), TACACS+

**Management**

- **DHCP** Client, Server, Option66/67/82
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** SNTP client

**Ordering Information**

- **EKI-7712E-4FI-AE** 8FE + 4SFP Port Managed Ethernet Switch w/Wide Temp
- **EKI-7712E-4F-AE** 8FE + 4SFP Port Managed Ethernet Switch