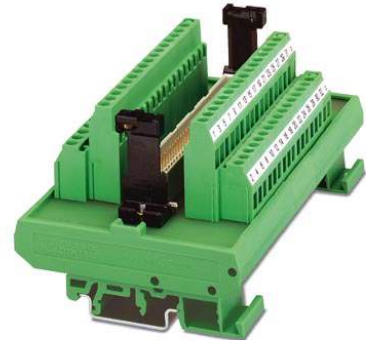


# UMK- C64M-VS

Order No.: 2970057

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2970057>

VARIOFACE module, for IEC 603/DIN 41612 plug connector, type C, 64-pos., a, c components mounted, with male connector, cable housing with screw interlock

## Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918087579      |
| Pack                     | 1 pcs.             |
| Customs tariff           | 85369010           |
| Weight/Piece             | 0.3118 KG          |
| Catalog page information | Page 230 (IF-2002) |

## Product notes

WEEE/RoHS-compliant since:  
09/29/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### General data

|   |        |
|---|--------|
| Nominal voltage $U_N$                     | 125 V  |
| Max. current carrying capacity per branch | 1 A    |
| Number of positions                       | 64     |
| Width                                     | 135 mm |

|   |                  |
|---|------------------|
| Height                                  | 62.5 mm          |
| Depth                                   | 77 mm            |
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Mounting position                       | Any              |
| Standards/regulations                   | DIN VDE 0110     |

#### Connection data

|  |                              |
|--|------------------------------|
| Connection 1                           | PCB connection               |
| Connection in acc. with standard       | IEC / EN                     |
| Type of connection                     | Screw connection             |
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup>          |
| Conductor cross section solid max.     | 4 mm <sup>2</sup>            |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup>          |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup>          |
| Conductor cross section AWG/kcmil min. | 24                           |
| Conductor cross section AWG/kcmil max  | 12                           |
| Stripping length                       | 8 mm                         |
| Screw thread                           | M3                           |
| Connection 2                           | IEC 603/DIN 41612 connection |
| Type of connection                     | Pluggable                    |

#### Certificates / Approvals



Certification

GOST

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;