
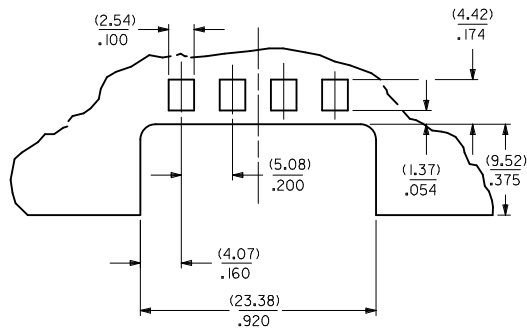


RECOMMENDED P.C. BOARD LAYOUT



NOTES:

- MOLDED RIBS TO PROVIDE AN INTERFERENCE FIT TO A (1.62± 0.10)/ P.C. BOARD
- PLATING
POSTPLATE (0.00254)/.000100 MIN. TIN OVER
0.00127/(.000050) MIN. NICKEL OVERALL.
- PART INTENDED TO MATE WITH HOUSING 8981-4P2 AND TERMINAL 8980-3*.
- PRODUCT SPEC. PS-8981-4SM* APPLIES.
- MATERIAL:
HOUSING - NYLON 46, GLASS FILLED,
UL 94V-0, COLOR: NATURAL (OFF-WHITE)
TERMINAL - PHOSPHOR BRONZE
- PARTS TO BE PACKED IN MOISTURE BARRIER BAG.

ADD NOTE 6. EC NO: S2012-0445 DRWN:SKANG 2011/12/07 CHKD:ATSEE 2012/01/05 APPR:MLONG 2012/01/10	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .008 2 PLACES ± 0.20 ± --- 1 PLACE ± --- ± --- ANGULAR ± 3 °	DIMENSION STYLE MM/IN DRAWN BY: JWAN DATE: 1995/06/29 CHECKED BY: SKTOH DATE: 1995/06/29 APPROVED BY: MSIMMEL DATE: 1995/06/30	SCALE NTS DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE POWER CONNECTOR, 4 CKTS DUAL SLOTS, SMT
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. 15-24-4784	DOCUMENT NO. SD-8981-4SM8	SHEET NO. 1 OF 1	
	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	REV C2				