


Features

VOLTAGE: 24V DC
CURRENT: 2.5 AMPS
LED VIEWING ANGLE: 120°



STANDARD PACKAGING:
5 METER REEL (400 LED'S)

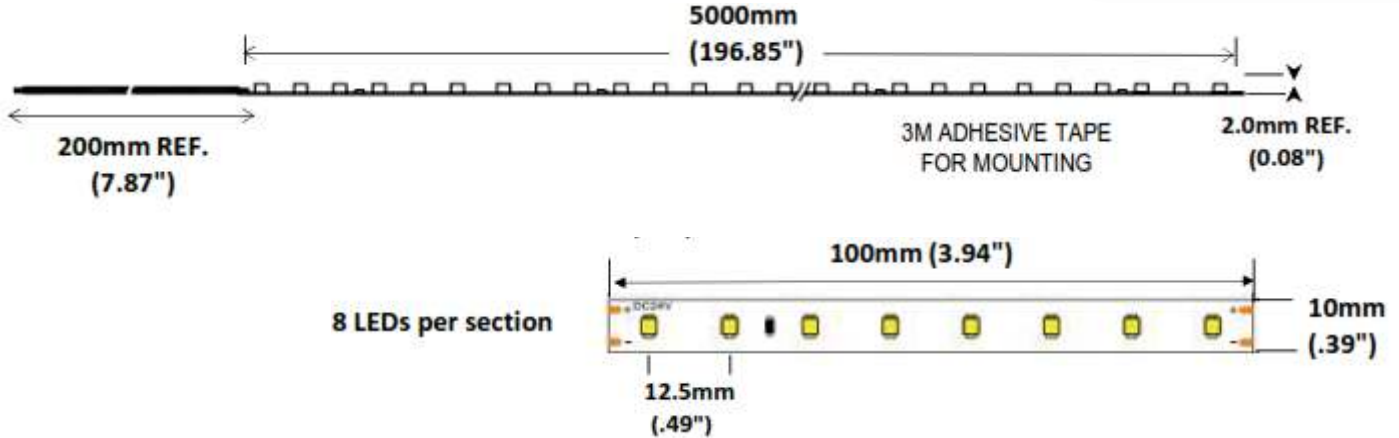

Parameter	Symbol	Rating	Units
Forward Current	IF	2.5	A
Power Dissipation	PD	60	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-20~+50°C	°C
Storage Temperature	Tstg	-30~+80°C	°C



Electro-Optical Characteristics (Ta=25°C)

JKL Part Number	Color	Number of LEDs	Input Voltage (V DC)	Power (W)	Current (A)	Radiance Angle	CCT (K)	Lumen Flux (lm)
ZFS-105000-24WW	Warm White	400	24	60	2.5	120°C	3050°K	8,520
ZFS-105000-24NW	Neutral White	400	24	60	2.5	120°C	4250°K	9,120
ZFS-105000-24CW	Cool White	400	24	60	2.5	120°C	6250°K	9,600

Note:

Maximum length in series: 5 Meters (16 feet) / 1 Reel

<p>METRIC</p> <p>THIRD ANGLE PROJECTION</p>	<p>DIMENSIONS ARE IN MILLIMETERS</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- REF. ANGLE +/- 0</p>	<p>JKL COMPONENTS CORPORATION</p>			
		<p>TITLE</p> <p>HIGH BRIGHTNESS 10MM LED FLEX RIBBON, 24VDC</p>			
<p>DRAWN BY</p> <p>S.Newton</p>	<p>APPV'D BY</p> <p>S.N.</p>	<p>DATE</p> <p>5/16/22</p>	<p>SIZE</p> <p>A</p>	<p>FSCM NO.</p> <p>55335</p>	<p>DRAWING NO.</p> <p>ZFS-105000-24 MULTI</p>
<p>RELEASED</p> <p>5/16/22</p>	<p>MANUAL REVISIONS NOT PERMITTED</p>		<p>SCALE</p> <p>NONE</p>	<p>RELEASED DATE</p> <p>5/16/22</p>	<p>REVISION DATE</p>
<p>REV. NO.</p>	<p>DESCRIPTION/ECO NUMBER</p>	<p>APPV'D DATE</p>	<p>REV. NO.</p>	<p>SHEET</p> <p>1 OF 1</p>	