

## HC-B 24-TMB-100/O1STM32S-STA


Order No.: 1604560



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604560>

HEAVYCON ADVANCE standard powder-coated, sleeve housing B24, with bayonet locking, height 100 mm, with 1xM32 thread, lateral cable outlet

### Commercial data

|                          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 948245 |
| sales group              | D201   |
| Pack                     | 10 pcs.  |
| Customs tariff           | 85389099   |
| Catalog page information | Page 475 (PC-2009)   |

### Product notes

WEEE/RoHS-compliant since:  
03/14/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

|        |  |
|--------|--|
| Note   | For contact inserts HC-B24, BB46, D64, DD108, HV10/16, M |
| Design | B24  |
| Height | 100 mm   |
| Width  | 57 mm  |

|                                 |                     |
|---------------------------------|---------------------|
| Length                          | 152 mm              |
| Housing type                    | Sleeve housings     |
| Locking type                    | Bayonet locking     |
| Cable exit                      | Lateral             |
| Type of the screw connection    | 1x M32              |
| Degree of protection            | IP65/67             |
| Ambient temperature (operation) | -40 °C ... 125 °C   |
| Housing material                | Aluminum, die-cast  |
| Housing surface material        | Powder-coated, gray |
| Seal material                   | NBR                 |
| Material lock                   | High-grade steel    |
| Material grip body interlock    | PA-GF               |
| Length of the assembly cutout   | 112 mm              |
| Width of the assembly cutout    | 35 mm               |


#### Accessories

| Item            | Designation         | Description   |
|-----------------|---------------------|---|
| <b>Assembly</b> |                     |   |
| 1604641         | HC-B-BF             | Panel mounting flange for HEAVYCON ADVANCE TMB housing with bayonet locking   |
| <b>General</b>  |                     |   |
| 1690969         | HC-B 24-TMB-SD-IP65 | HEAVYCON ADVANCE IP65 protective cover B24, with bayonet locking, with retaining cord, diameter of retaining cord eyelet 3 mm |
| 1604654         | HC-B-BF-SET         | Bayonet mounting-flange set, consisting of 2 mounting flanges with 4 self-tapping Torx head screws and 4 fan-type spacers     |

## Diagrams/Drawings

### Dimensioned drawing

---

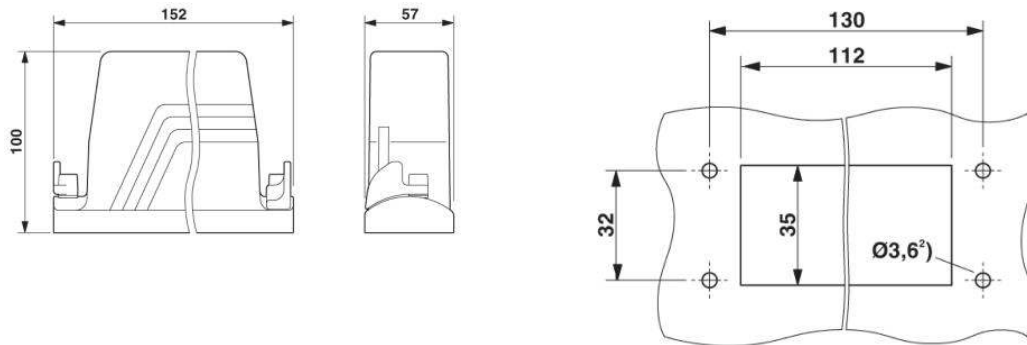

Panel cutout

<sup>2)</sup> When self-tapping Torx screws are used  
(Torx20, M4)

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;