
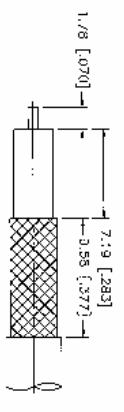
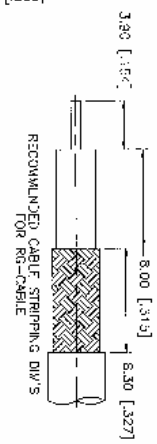
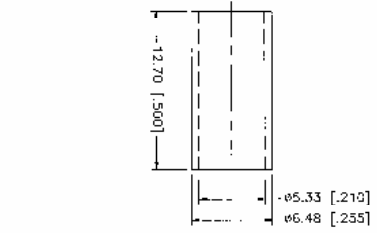


REV	DATE	DESCRIPTION
NC	07/23/04	INITIAL RELEASE

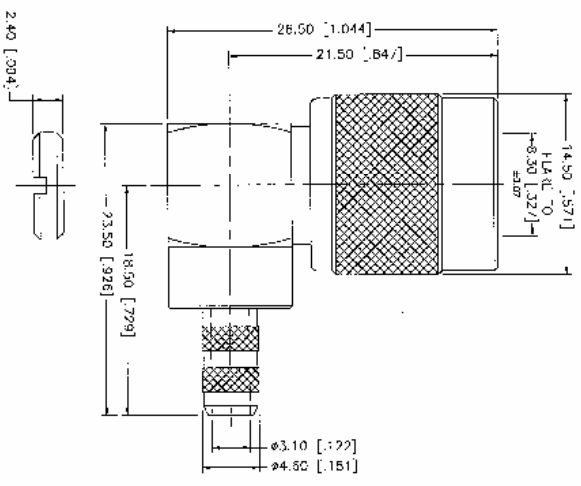

NOTES:
 1. CRIMPED T-ROD HEX SIZE 2-37
 2. SNI OFFR CENTER CONTACT.

RECOMMENDED CABLE STRIPPING DIM'S FOR RG-58C WITH FOIL BRAID:

ELECTRICAL:
 A) AMPERAGE: 50amps
 B) FREQUENCY RANGE: 30-6 GHz
 C) VSWR (RETURN LOSS): $V_{1.0}$ (TYPICAL), MAX
 D) DIELECTRIC WFT IS AVERAGE VOLTAGE:
 1500 VRMS, MIN.

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	TNC REVERSE POLARITY R/A CRIMP PLUG (FOR RG-58/U, 58C/U CABLE)
2	NICKEL	PHOS. BRN/4	
3	NICKEL	COIL	
4	NICKEL	COIL	
5	NICKEL	COIL	
6	NICKEL	COIL	
7	NICKEL	COIL	
8	NICKEL	COIL	
9	NICKEL	COIL	

DATE	DATE	DATE	DATE
07/23/04	07/23/04	07/23/04	07/23/04

Amphenol Connex