

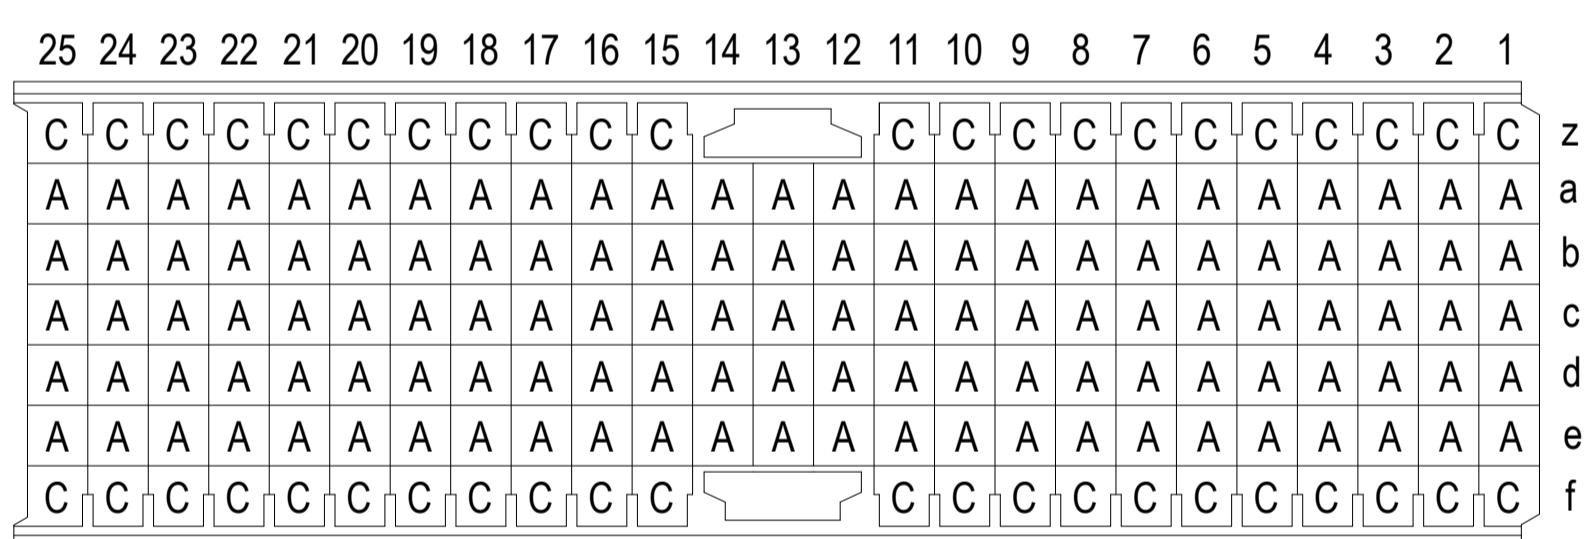
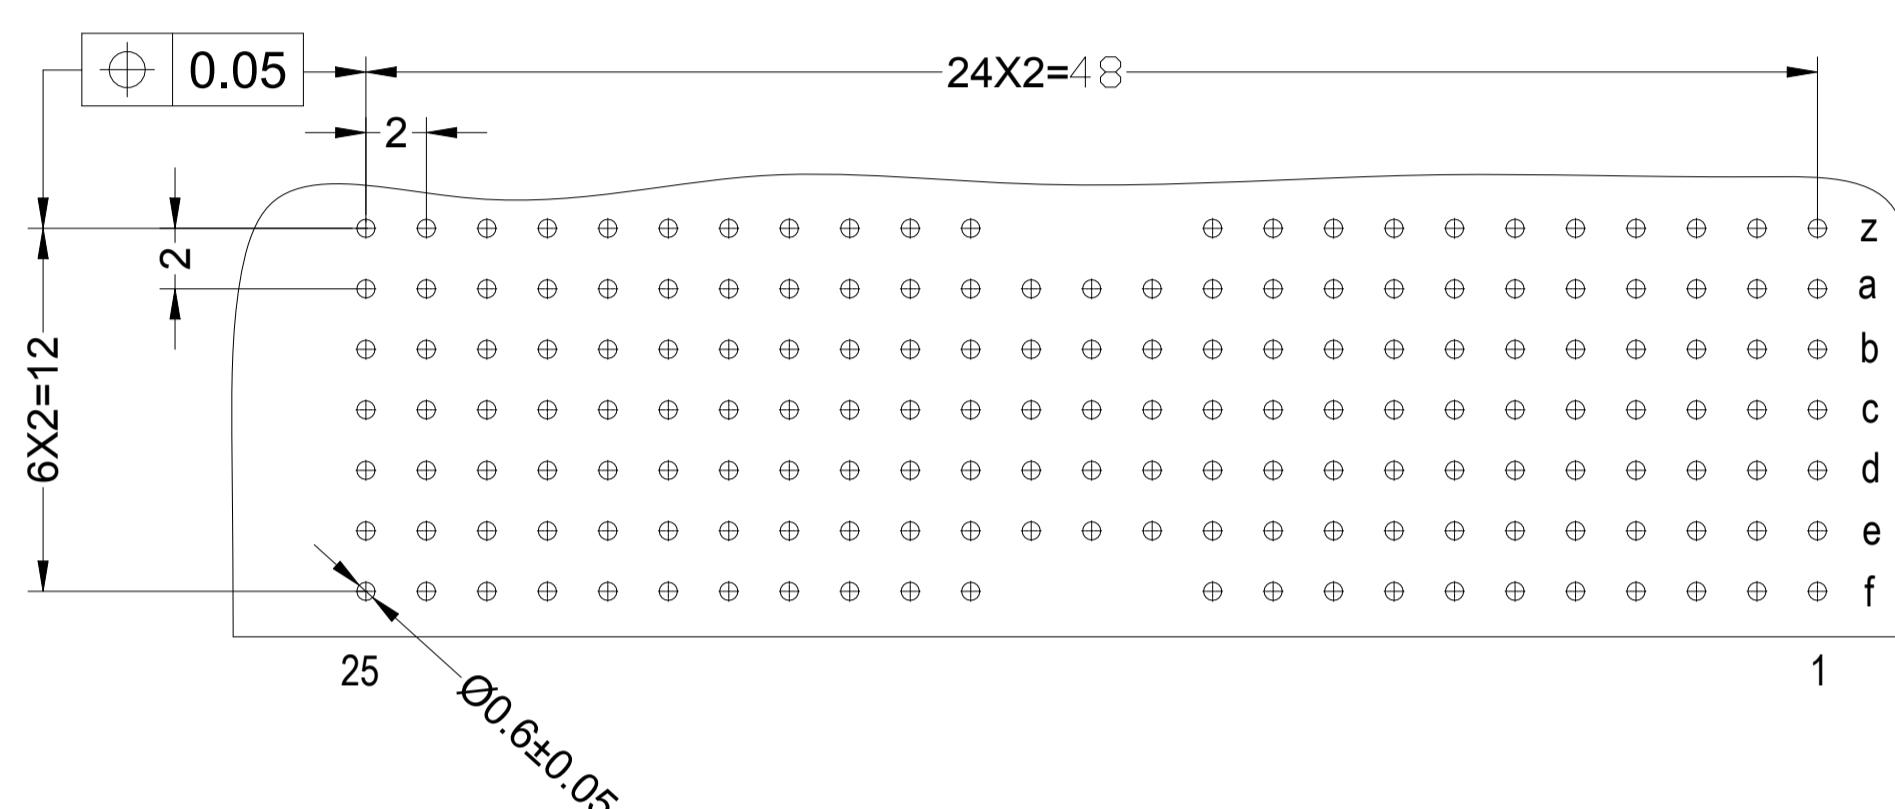
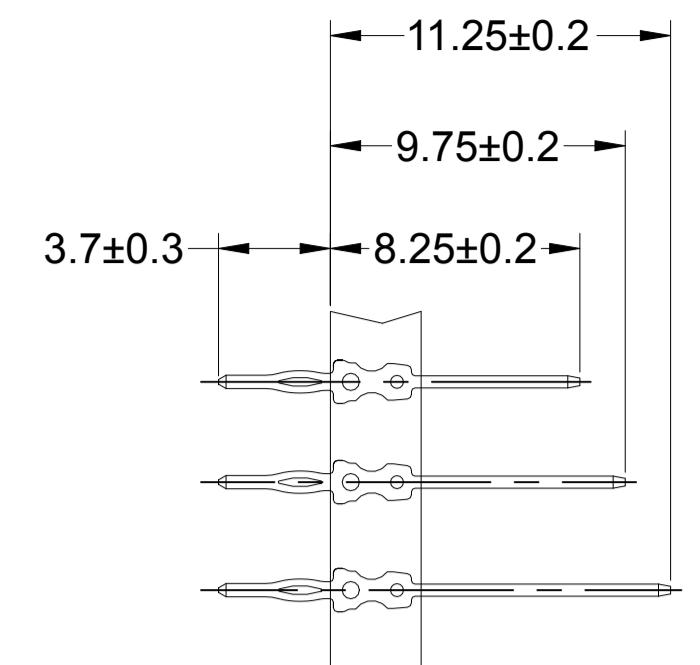
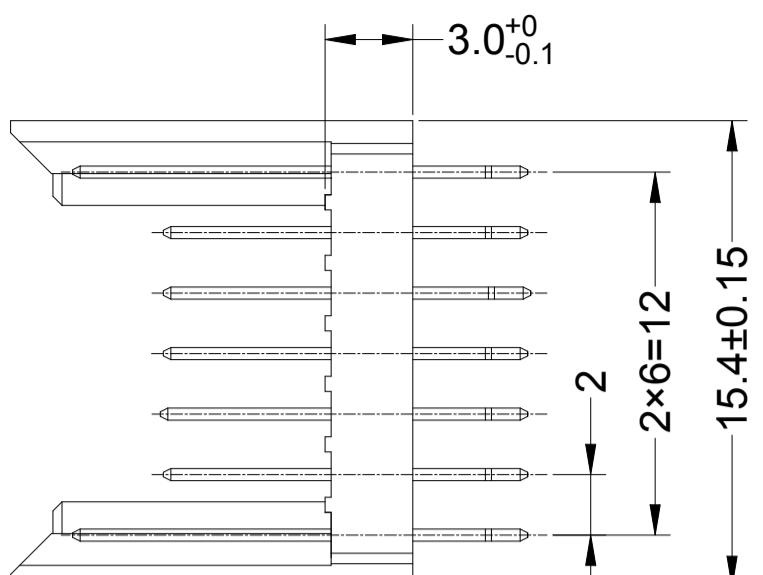


P	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL DRAWING	18OCT2021	TL	HL

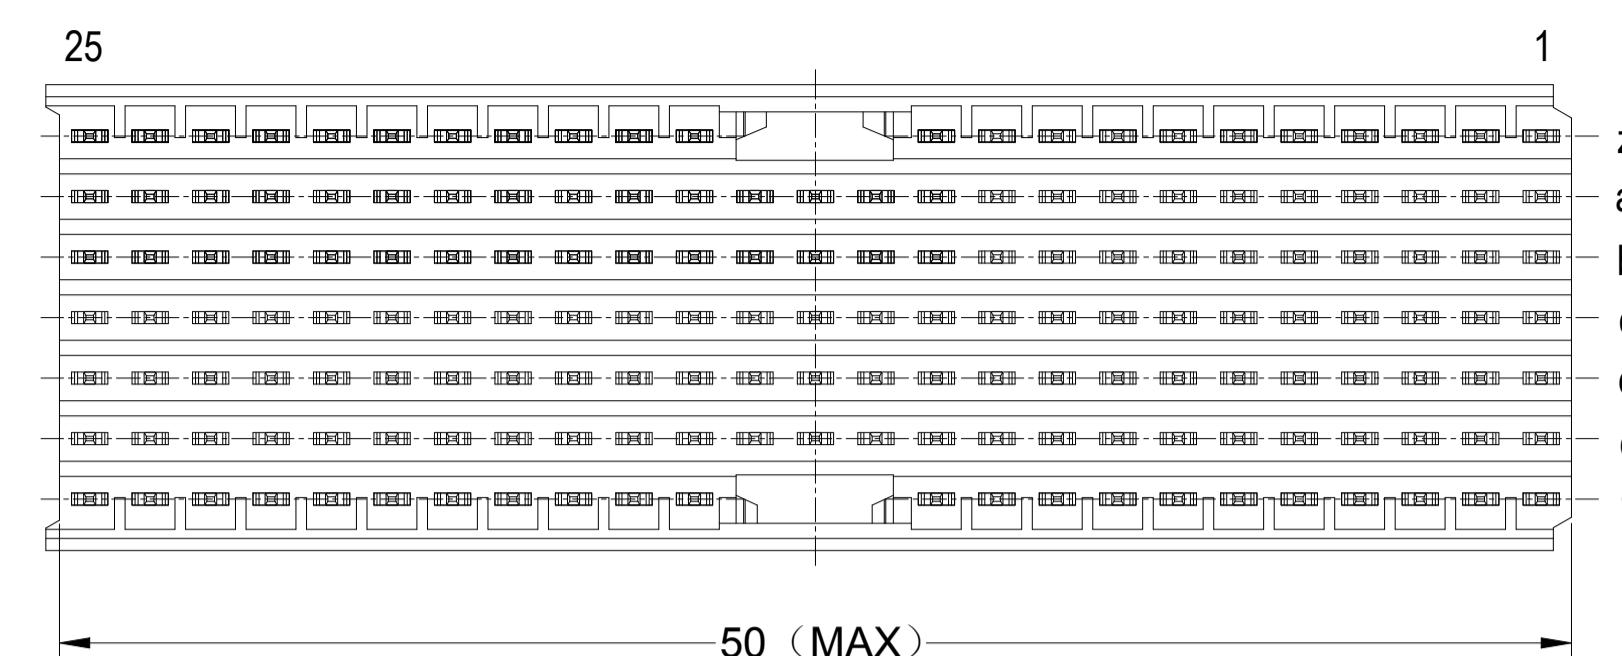


RECOMMEND PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN
TOLERANCE ±0.05



MATERIAL:

CONTACT: COPPER ALLOY.

HOUSING: GLASS-FILLED POLYESTER.




GENERAL PLATING SPECIFICATION: UNDERPLATING

(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5µm MIN TIN.

FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.



CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.



CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWY	27MAY2021	NAME
O-RING	±0.2	QMK	27MAY2021	
2-PIN	±0.2	ALEX XU	APVD	HOPFF LU
3-PIN	±0.2	PRODUCT SPEC	27MAY2021	108-19082
4-PIN	±0.2	APPLICATION SPEC		114-160149
5-PIN	±0.2	WEIGHT		0
		SIZE	CAGE CODE	DRAWING NO
		A1	00779	2392188
		RESTRICTED TO		—
		CUSTOMER DRAWING		
		SCALE	4:1	SHEET 1 OF 1 REV A