



LOW PROFILE SURFACE MOUNT 880-960/1710-2170 MHZ DISK ANTENNA Laird's LPS88213NT antenna is a multiband low profile disk antenna operating over the 880-960 MHz and 1710-2170 MHz cellular bands. Designed to be a surface mount antenna that performs well on metallic surfaces, the antenna is ideal for use in Machine-to-Machine (M2M) applications. The housing incorporates a low profile, rugged design that conforms to IP67 standards making the antenna suitable for both indoor and outdoor solutions.

FEATURES

- Low Profile aesthetically neutral housing
- Surface mount with stud & locking nut
- Equitable for both Indoor & Outdoor applications
- IP67 rated

BENEFITS

- Cellular and 2G/3G data communications in a single solution
- Applicable for both metal and non-metal housings

MARKETS

- M2M
- Cellular
- Electric, gas & water utilities
- Remote monitoring, kiosks & ATM
- Production monitoring & control
- Transportation, shipping hubs & ports

SPECIFICATIONS

PARAMETER	SPECIFICATION			
	880-960	1710-1880	1850-1990	1910-2170
Frequency Bands, MHz	880-960	1710-1880	1850-1990	1910-2170
VSWR (Typ)				
On Plastic Housing	<2.3:1	<2.5:1	<1.8:1	<2.3:1
On Metal Housing	<2.4:1	<1.4:1	<1.5:1	<2.5:1
VSWR (Max)	3.0:1	3.0:1	3.0:1	3.0:1
Peak Gain, dBi (Typ)				
On Plastic Housing	2.3	1.7	2.0	2.5
On Metal Housing	2.2	4.4	3.7	3.7
Peak Gain, dBi (Max)				
On Plastic Housing	3.4	2.1	2.5	3.0
On Metal Housing	2.5	5.0	3.9	3.9
Nominal Impedance	50 Ω			
Max Power	10 Watts			
Azimuth Beam Width (deg)	Omnidirectional			
Polarization	Linear, Vertical			
Power, Max	10 Watts			
Dimensions (diameter x height)	90 mm X 26 mm (3.5" X 1.0")			
Weight	108.5 g (0.24 lbs)			
Wind Survival	200 km/h (119.9 mph)			
Storage Temperature	-40° C to +85° C			
Operational Temperature	-30° C to +70° C			
Radome	PC, Black			
IP Rating	IP67			
Material Substance Compliance	RoHS Compliant			

CONNECTORS

MODEL NUMBER	CABLE LENGTH	CONNECTOR
LPS88213NT-61SMAM	61 cm (24 in)	SMA- male
LPS88213NT-61RTNM	61 cm (24 in)	RTNC- male

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com



AZIMUTH PATTERNS

ELEVATION PATTERNS



AZIMUTH PATTERNS

ELEVATION PATTERNS



880 MHz Radiation Pattern





960 MHz Radiation Pattern

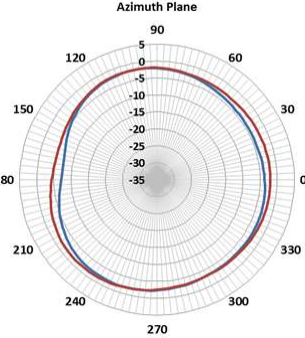



1710 MHz Radiation Pattern





1850 MHz Radiation Pattern

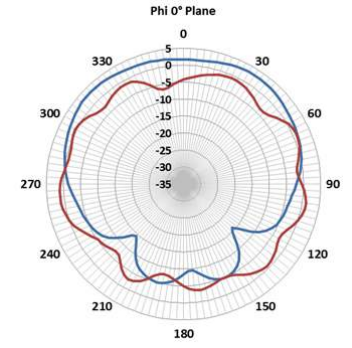



1910 MHz Radiation Pattern



1990 MHz Radiation Pattern

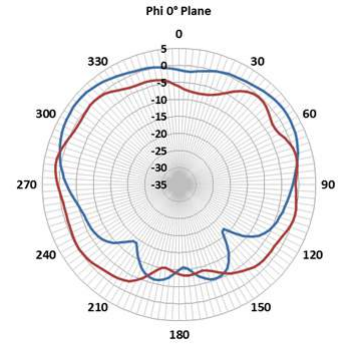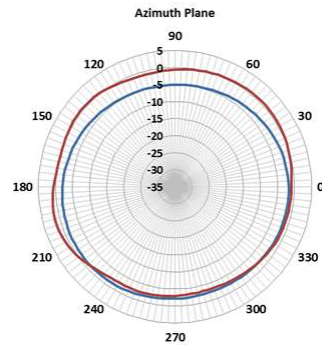

2170 MHz Radiation Pattern



— Antenna on Metal Housing
— Antenna on Plastic Housing

ANT-DS-LPS88213NT_0515

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.