


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	10DEC2014	MB	SB
	B	REVISED PER ECR-15-003647	05MAR2015	MM	SB

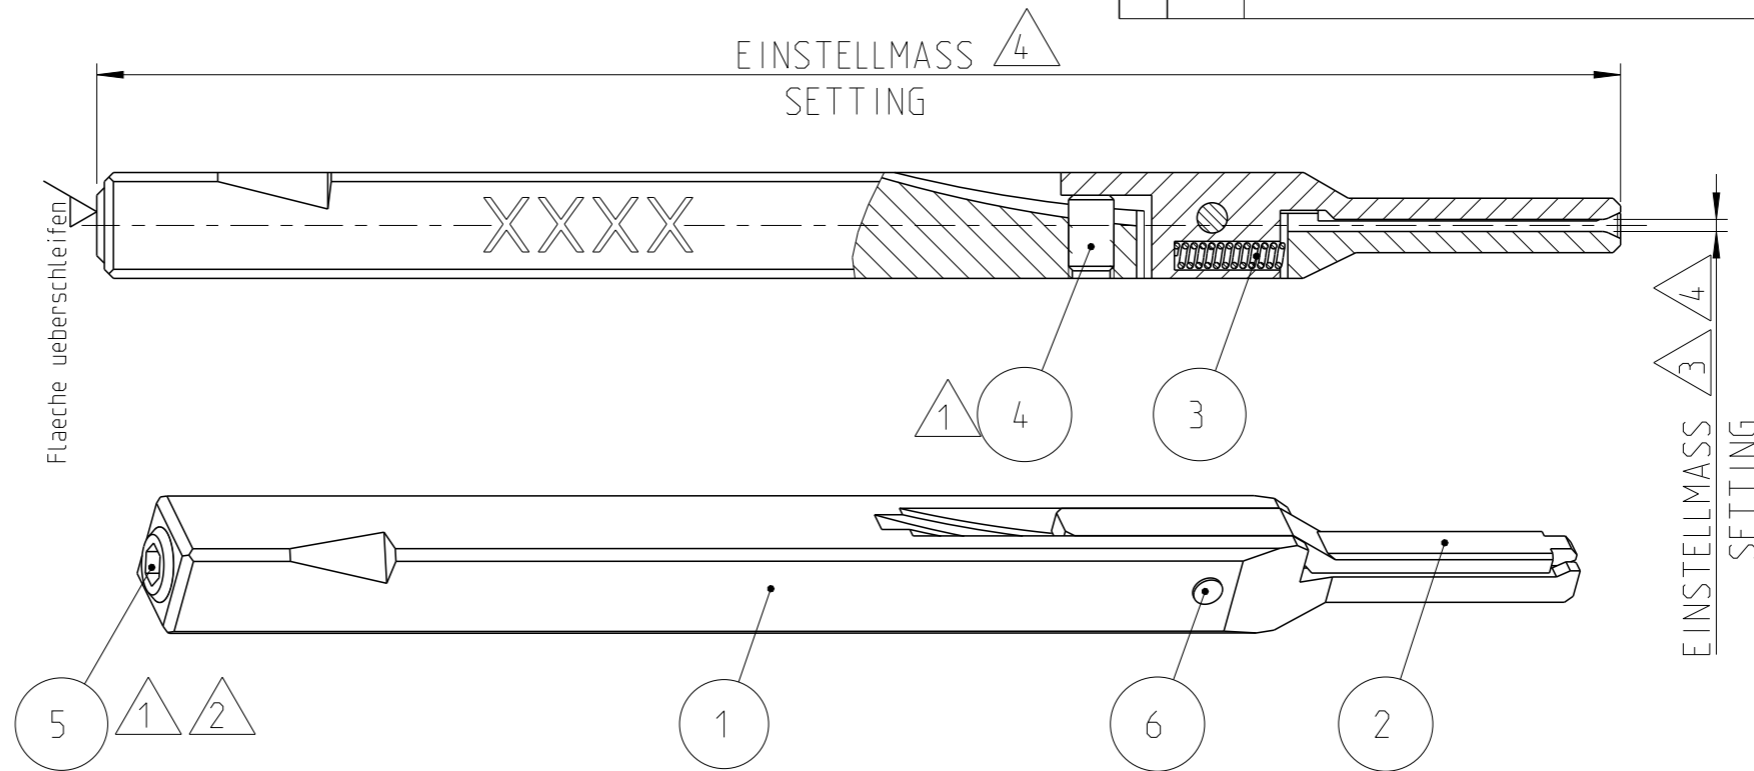

- 1 Mit Schraubensicherung
Loctite 243 gesichert
Locked with threadlocker
Loctite 243
- 2 Bei Erstmontage
vollständig einschrauben
Insert complete for
initial assembly
- 3 Öffnungsspiel Klemmhebel
zu eingelegtem Kontakt=0.1 mm
Opening clearance
clamping lever to
loaded contact=0.1 mm
- 4 !!!Achtung:
Vor Einsatz im Umbausatz
Maße kontrollieren und ggf.
einstellen.
Zu lang eingestellte Finger
können zu Beschädigungen
an Finger und Umbausatz
führen!!!
!!!Attention:
Check measurement before
using on a conversion kit.
Too long adjusted fingers
may damage the finger
and conversion kit!!!

POS	QTY	TE/PN	PART REV	DESCRIPTION	WEAR	SPARE
1	1	1372477-9	B	SETZFINGER INSERTION FINGER	-	-
2	1	3-1372463-3	C	KLEMMHEBEL CLAMPING LEVER	-	-
3	1	8-547505-4	A1	Druckfeder -	-	YES
4	1	2-519011-0	B	SCREW M3x5 DIN 913 -	-	YES
5	1	3-519011-7	B	SCREW M5x8 DIN 913 -	-	YES
6	1	519051-7	A	Zyl.-Stift 2m6x8 DIN 6325 -	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BERGUNDE	10DEC2014	STE TE Connectivity	
DIMENSIONS: mm		CHK -	APVD -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC -		NAME SETZFINGER KOMPLETT INSERTION FINGER COMPLETE	
MATERIAL -		APPLICATION SPEC -		SIZE A3	RESTRICTED TO -
FINISH -		WEIGHT 30g		CAGE CODE -	DRAWING NO C-4-1372415-8
		Customer Drawing		SCALE 2:1	SHEET 1 OF 1
				REV B	