



Panduit Part number	Wire range AWG (mm <sup>2</sup> )	Tab Size	Housing color	Dim. "F"	Dim. "W"	Dim. "L"	Maximum Wire Insulation Diameter	MINIMUM Wire Insulation Diameter	Tools
DNG18-187FB	22-18 (0.5 - 1.0)	.187 X .032	Red	.22 (5.6)	.29 (7.4)	.89 (22.6)	.126 (3.20)	.050 (1.27)	CT-1015
DNG18-188FB	22-18 (0.5 - 1.0)	.187 X .020	Red	.22 (5.6)	.29 (7.4)	.89 (22.6)	.126 (3.20)	.050 (1.27)	
DNG18-250FB	22-18 (0.5 - 1.0)	.250 X .032	Red	.22 (5.6)	.35 (8.9)	.93 (23.6)	.126 (3.20)	.050 (1.27)	
* DNG14-187FB	16-14 (1.5 - 2.5)	.187 X .032	Blue	.25 (6.4)	.29 (7.4)	.89 (22.6)	.153 (3.89)	.070 (1.78)	
* DNG14-188FB	16-14 (1.5 - 2.5)	.187 X .020	Blue	.25 (6.4)	.29 (7.4)	.89 (22.6)	.153 (3.89)	.070 (1.78)	
DNG14-250FB	16-14 (1.5 - 2.5)	.250 X .032	Blue	.25 (6.4)	.35 (8.9)	.93 (23.6)	.153 (3.89)	.070 (1.78)	

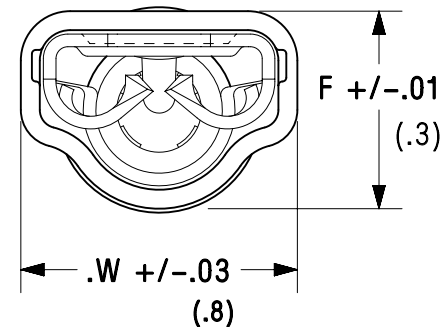

- Notes:
- Used for:
    - A. 600V max voltage rating
    - B. 221°F (105°C) max temperature rating
    - C. Stranded copper wire only
  - Wire strip length:
    - 250:  $1/4 \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix} (6.4 \begin{smallmatrix} +.8 \\ -0 \end{smallmatrix})$
    - 187/188:  $9/32 \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix} (7.1 \begin{smallmatrix} +.8 \\ -0 \end{smallmatrix})$
  - Material:
    - A. Stamping - Tin plated brass
    - B. Housing - Nylon
  - SEE [www.panduit.com](http://www.panduit.com) FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
  - Dimensions in brackets are in millimeters or mm<sup>2</sup>
  - DNG14-187FB AND DNG14-188FB ARE UL RECOGNIZED FOR USE WITH COPPER ALLOY TABS.

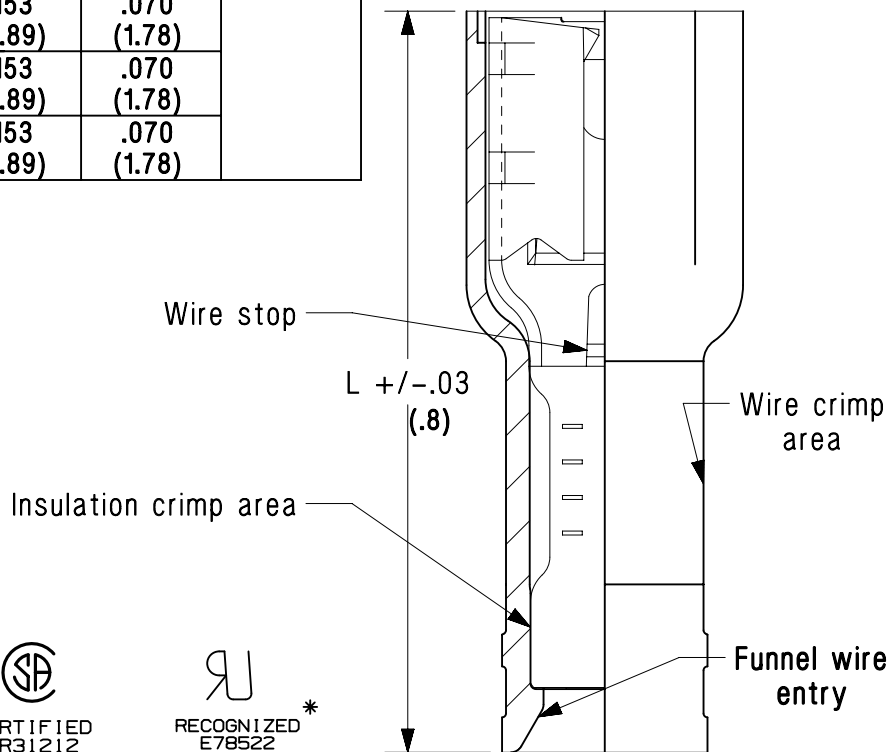

09	3-19-19	JEH	SKB	JADE	WAS: (A) LISTED 587H E52164	045190	
08	8/11	SHOR			MODIFIED NOTE #4, REMOVED PACKAGE SIZES		
07	02/11	SRB			Added Packaging code L= 50 pieces		
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	CUST

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

**Supra-Grip™**  
 Fully Insulated Loose Piece Female Disconnect

DRAWN BY: BDK    CHK'D: RLS    SCALE: None    DRAWING NO./CAD FILENAME: A41570 / N41570BA